

राष्ट्रीय राजमार्ग एवं अवसंरचना विकास निगम लिमिटेड

सड़क परिवहन और राजमार्ग मंत्रालय, भारत सरकार

प्रथम तल, टावर ए, वर्ल्ड ट्रेड सेंटर, नौरोजी नगर, नई दिल्ली-110029,

National Highways & Infrastructure Development Corporation Limited

Ministry of Road Transport & Highways, Government of India

First Floor, Tower A, World Trade Centre, Nauroji Nagar, New Delhi-110029, Tel: +91 11 26768950, www.nhidcl.com



(भारत सरकार का उद्यम)

(A Government of India Enterprise)

NHIDCL/ICBR/Ar.Pr./Bal.work/Doginala-Gau/242940/4108

Date: 26.11.2024

Reply to Pre-Bid Queries

Subject: Construction of High-Altitude Hill Road from Doginala to Gau from KM 0.000 to KM 15.918 in Upper Subansiri District in the state of Arunachal Pradesh on EPC mode.

Tender ID: 2024_NHIDC_829966_1


Sl No.	Clause No.	Query	Reply
1	Plan Profile	Alignment and Traffic Signage Plan: Schedule-A states that the Alignment Plan with Finished Road Level is enclosed in Annex-III, along with the Traffic Signage Plan. However, we have not found any drawings under Annex-III in the documents or on the e-tendering portal. Please provide the alignment plan, plan & profile showing the OGL & required FRL, and the traffic signage plan as referenced in the bid documents.	Please refer modified Plan & Profile uploaded on CPP portal and NHIDCL website.
2	Schedule -B	Status of Completed Works: The tender title "Balance Works" implies some portions of the project are already completed or underway. Schedule-A specifies that only the Major Bridge at Ch. 0+300 has been partially completed, and Clause-7 of Annex-I, Schedule-B, indicates that the Culvert at Ch. 0+030 is partially completed. No further details on status of earthwork, roadwork, or structures are indicated. It is implied that no other work has been undertaken by the previous contractor and bid is to be submitted as per this assumption. If that is not the case, kindly provide details of	As per Schedule -B uploaded on CPP portal and NHIDCL website.

Di

V3

26/11/2024

P.T.O

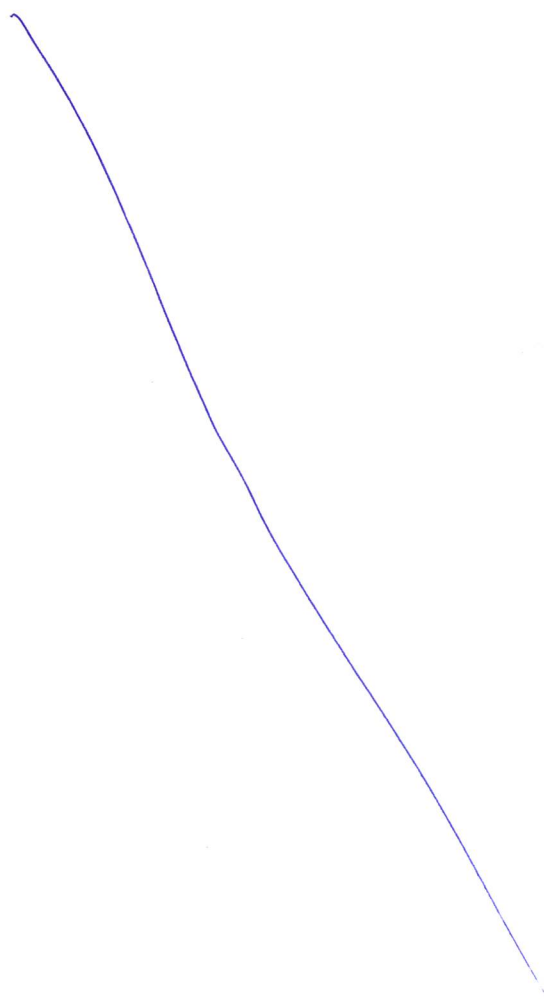

		the work undertaken by them and the status of the same.	
3	Drawing	Clear Drawings for TCS: Schedule-B1 refers to TCS-1 through TCS-4, but the included drawings are not legible. Please provide clear versions of these four TCS types that will be required for this project	Please refer modified Plan & Profile uploaded on CPP portal and NHIDCL website.
4	General	Detailed Project Report: Clause 1.2.3 of the RFP mentions that the Feasibility Report/Detailed Project Report prepared by the Authority or its Consultants is enclosed. However, it has not been uploaded with the other bid documents on the e-tendering portal. Kindly provide the Detailed Project Report prepared by the Authority or its Consultants.	Please refer DPR uploaded on CPP portal and NHIDCL website.
5	Clause no. 1 of Annex-I of Schedule A	Project Coordinates Verification: The coordinates for the start point at Doginala (Nacho Side of River Subansiri) are provided as 28024'17"N, 93043'35"E, and for the endpoint at Gau as 28028'35"N, 93042'10"E in Clause-1 of Annex-I in Schedule-A. These coordinates do not appear on Google Maps/Google Earth. When entered, the location returns as "Google Maps can't find this location." Please confirm if these coordinates are correct and, if so, provide a location map for the start and end points to assist us in locating the project site.	Refer corrigendum-I uploaded on CPP portal and NHIDCL website.
6	Drawing	TCS-1 Details: TCS-1 is described as the typical cross section to be followed where there is a cutting section of less than 0.5m. However, a Toe Wall/Breast Wall is shown to be constructed on the hill side. This Toe Wall/Breast Wall may not be required as the cutting height is less than 0.5m. Kindly review and update the TCS-1 accordingly.	As per TCS-1 uploaded on CPP portal and NHIDCL website.

[Signature]
26/11/2024

7	<p>Clause no. 11 of Annex-1 of Schedule B</p>	<p>Length of Breast Wall & Retaining Wall: The total length for Breast Wall & Retaining wall is given as 7,790 meters under Clause-11 of Annex-I of Schedule-B. However, all TCS sections shows the construction of a Toe Wall/ Breast Wall/Retaining Wall which would then come up to a length of 15,460 meters (excluding structures). Kindly clarify if a Toe Wall/Breast Wall/Retaining Wall structure is required to be constructed throughout the project length as indicated in the TCS or if the lengths mentioned under Clause-11 of Annex-I of Schedule-B will suffice.</p>	<p>Refer corrigendum-I uploaded on CPP portal and NHIDCL website.</p>
8	<p>Schedule-H</p>	<p>Discrepancy in Payment Schedule for "Other Works" Given Under Schedule-H: There is a discrepancy in the payment split-up under "Other Works" given under Schedule-H. The sum of all the percentages for the items under "Other Works" comes up to 109% instead of 100%. Kindly review the split up and revise the percentages.</p>	<p>Refer corrigendum-I uploaded on CPP portal and NHIDCL website.</p>


 General Manager (Tech)
 Arunachal Pradesh Division