

EPC (ENGINEERING PROCUREMENT AND CONSTRUCTION) AGREEMENT FOR

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag (Km 416.930 to 417.300),Pursari (Km 420.850 to 420.960) ,Chamoli (Km 427.000 to 427.300) ,Khetrapal (Km 429.180 to 429.400) ,Kaudia (Km 437.800 to 437.865), Gadora-01 (439.175 to 439.570), Gadora-02 (Km 439.900 to 440.310), Pipalkoti-01 (Km 445.560 to 445.710) , Pipalkoti -02 (Km 445.710 to 445.770) , Bhanerpani (Km 445.950 to 446.025) , Pakhi (Km 452.300 to 452.500) &Patalganga (Km 455.870 to 455.930) On NH-58 (NEW NH-07) under Package -02 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and construction (EPC) Contract.

**राष्ट्रीय राजमार्ग एवं अवसंरचना विकास निगम लिमिटेड
National Highways & Infrastructure Development Corporation Limited**

FEB, 2021

Contents

Overview of the Framework	1
 PART I	
Preliminary	
Recitals	9
1 DEFINITIONS AND INTERPRETATION	3
1.1 Definitions	3
1.2 Interpretation	3
1.3 Measurements and Arithmetic Conventions	5
1.4 Priority of Agreements and Errors/Discrepancies	5
1.5 Joint and Several Liability	6
 PART II	
Scope of the Project	
2 SCOPE OF THE PROJECT	7
2.1 Scope of the Project	7
3 OBLIGATIONS OF THE CONTRACTOR	8
3.1 Obligations of the Contractor	8
3.2 Obligations Relating to Sub-contracts and any other Agreements	9
3.3 Employment of Foreign Nationals	10
3.4 Contractor's Personnel	10
3.5 Advertisement on Project Highway	10
3.6 Contractor's Care of the Works	11
3.7 Electricity, Water and other Services	11
3.8 Unforeseeable Difficulties	11
4 OBLIGATIONS OF THE AUTHORITY	12
4.1 Obligations of the Authority	12
4.2 Maintenance Obligations Prior to the Appointed Date	13
4.3 Environmental Clearances	13
5 REPRESENTATIONS AND WARRANTIES	14
5.1 Representations and Warranties of the Contractor	14
5.2 Representations and Warranties of the Authority	15
5.3 Disclosure	16
6 DISCLAIMER	17
6.1 Disclaimer	17

PART III

Construction and Maintenance

7	PERFORMANCE SECURITY	18
7.1	Performance Security	18
7.2	Extension of Performance Security	18
7.3	Appropriation of Performance Security	18
7.4	Release of Performance Security	19
7.5	Retention Money	19
8	RIGHT OF WAY	21
8.1	The Site	21
8.2	Procurement of the Site	21
8.3	Damages for Delay in Handing Over the Site	22
8.4	Site to be Free from Encumbrances	23
8.5	Protection of Site from Encroachments	23
8.6	Special/Temporary Right of Way	23
8.7	Access to the Authority and the Authority's Engineer	23
8.8	Geological and Archaeological Finds	24
9	UTILITIES AND TREES	25
9.1	Existing Utilities and Roads	25
9.2	Shifting of Obstructing Utilities	25
9.3	New Utilities	25
9.4	Felling of Trees	26
10	DESIGN AND CONSTRUCTION OF THE PROJECT HIGHWAY	27
10.1	Obligations prior to Commencement of Works	27
10.2	Design and Drawings	28
10.3	Construction of the Project Highway	30
10.4	Maintenance during Construction Period	31
10.5	Extension of Time for Completion	32
10.6	Incomplete Works	33
10.7	Maintenance Manual	33
11	QUALITY ASSURANCE, MONITORING AND SUPERVISION	34
11.1	Quality of Materials and workmanship	34
11.2	Quality Control System	34
11.3	Methodology	34
11.4	Inspection and Technical Audit by the Authority	35
11.5	External TECHNICAL audit	35
11.6	Inspection of Construction Records	35
11.7	Monthly Progress Reports	35
11.8	Inspection	35
11.9	Samples	36

11.10	Tests	36
11.11	Examination of Work before Covering Up	36
11.12	Rejection	36
11.13	Remedial Work	37
11.14	Delays during Construction	37
11.15	Quality Control Records and Documents	37
11.16	Video Recording	37
11.17	Suspension of Unsafe Construction Works	38
12	COMPLETION CERTIFICATE	39
12.1	Tests on Completion	39
12.2	Provisional Certificate	39
12.3	Completion of Remaining Works	40
12.4	Completion Certificate	40
12.5	Rescheduling of Tests	41
13	CHANGE OF SCOPE	42
13.1	Change of Scope	42
13.2	Procedure for Change of Scope	42
13.3	Payment for Change of Scope	43
13.4	Restrictions on Change of Scope	44
13.5	Power of the Authority to Undertake Works	44
14	MAINTENANCE	45
14.1	Maintenance Obligations of the Contractor	45
14.2	Maintenance Requirements	46
14.3	Maintenance Programme	46
14.4	Safety, Vehicle Breakdowns and Accidents	46
14.5	Lane Closure	46
14.6	Reduction of Payment for non-performance of Maintenance Obligations	47
14.7	Authority's Right to Take Remedial Measures	47
14.8	Restoration of Loss or Damage to Project Highway	47
14.9	Overriding Powers of the Authority	47
15	SUPERVISION AND MONITORING DURING MAINTENANCE	49
15.1	Inspection by the Contractor	49
15.2	Inspection and Payments	49
15.3	Tests	49
15.4	Reports of Unusual Occurrence	50
16	TRAFFIC REGULATION	51
16.1	Traffic Regulation by the Contractor	51
17	DEFECTS LIABILITY	52
17.1	Defects Liability Period	52
17.2	Remedying Defects	52

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

17.3	Cost of Remedying Defects	52
17.4	Contractor's Failure to Rectify Defects	52
17.5	Contractor to Search Cause	53
17.6	Extension of Defects Liability Period	53
18	AUTHORITY'S ENGINEER	54
18.1	Appointment of the Authority's Engineer	54
18.2	Duties and Authority of the Authority's Engineer	54
18.3	Delegation by the Authority's Engineer	54
18.4	Instructions of the Authority's Engineer	55
18.5	Determination by the Authority's Engineer	55
18.6	Remuneration of the Authority's Engineer	55
18.7	Termination of the Authority's Engineer	56
 PART IV		
Financial Covenants		
19	PAYMENTS	57
19.1	Contract Price	57
19.2	Advance Payment	57
19.3	Procedure for Estimating the Payment for the Works	58
19.4	Stage Payment Statement for Works	59
19.5	Stage Payment for Works	59
19.6	Monthly Maintenance Statement of the Project Highway	60
19.7	Payment for Maintenance of the Project Highway	60
19.8	Payment of Damages	60
19.9	Time of Payment and Interest	61
19.10.	Price Adjustment for the Works	61
19.11	Restrictions on Price Adjustment	64
19.12.	Price Adjustment for Maintenance of Project Highway	64
19.13	Final Payment Statement	64
19.14	Discharge	65
19.15	Final Payment Certificate	65
19.16	Final Payment Statement for Maintenance	65
19.17	Change in Law	66
19.18	Correction of Interim Payment Certificates	66
19.19	Authority's Claims	66
19.20	Bonus for Early Completion	66
20	INSURANCE	67
20.1	Insurance for Works and Maintenance	67
20.2	Notice to the Authority	68
20.3	Evidence of Insurance Cover	68
20.4	Remedy for Failure to Insure	68
20.5	Waiver of Subrogation	68

20.6	Contractor's Waiver	69
20.7	Cross Liabilities	69
20.8	Accident or Injury to Workmen	69
20.9	Insurance Against Accident to Workmen	69
20.10	Application of Insurance Proceeds	69
20.11	Compliance with Policy Conditions	70

Part V

Force Majeure and Termination

21	FORCE MAJEURE	71
21.1	Force Majeure	71
21.2	Non-Political Event	71
21.3	Indirect Political Event	71
21.4	Political Event	72
21.5	Duty to Report Force Majeure Event	72
21.6	Effect of Force Majeure Event on the Agreement	73
21.7	Termination Notice for Force Majeure Event	74
21.8	Termination Payment for Force Majeure Event	74
21.9	Dispute Resolution	74
21.10	Excuse from Performance of Obligations	75
22	SUSPENSION OF CONTRACTOR'S RIGHTS	76
22.1	Suspension upon Contractor Default	76
22.2	Authority to Act on Behalf of the Contractor	76
22.3	Revocation of Suspension	76
22.4	Termination	76
23	TERMINATION	77
23.1	Termination for Contractor Default	77
23.2	Termination for Authority Default	79
23.3	Termination for Authority's convenience	79
23.4	Requirements after Termination	80
23.5	Valuation of Unpaid Works	80
23.6	Termination Payment	80
23.7	Other Rights and Obligations of the Parties	81
23.8	Survival of Rights	82

PART VI

Other Provisions

24	ASSIGNMENT AND CHARGES	83
24.1	Restrictions on Assignment and Charges	83
24.2	Hypothecation of Materials or Plant	83

25	LIABILITY AND INDEMNITY	84
25.1	General Indemnity	84
25.2	Indemnity by the Contractor	84
25.3	Notice and Contest of Claims	85
25.4	Defence of Claims	85
25.5	No Consequential Claims	86
25.6	Survival on Termination	86
26	DISPUTE RESOLUTION	87
26.1	Dispute Resolution	87
26.2	Conciliation	87
26.3	Arbitration	87
26.4	Adjudication by Regulatory Authority, Tribunal or Commission	88
27	MISCELLANEOUS	89
27.1	Governing Law and Jurisdiction	89
27.2	Waiver of Immunity	89
27.3	Delayed Payments	89
27.4	Waiver	89
27.5	Liability for Review of Documents and Drawings	90
27.6	Exclusion of Implied Warranties etc.	90
27.7	Survival	90
27.8	Entire Agreement	91
27.9	Severability	91
27.10	No Partnership	91
27.11	Third Parties	91
27.12	Successors and Assigns	91
27.13	Notices	91
27.14	Language	92
27.15	Counterparts	92
27.16	Confidentiality	92
27.17	Copyright and Intellectual Property Rights	92
27.18	Limitation of Liability	93
28	DEFINITIONS	94
28.1	Definitions	94

Schedules

A	Site of the Project	102
1.	The Site	102
	Annex-I: Site	103
	Annex-II: Dates for Providing Right of Way	106
	Annex-III: Alignment Plans	107
	Annex-IV : Environmental Clearances	110

B	Development of the Project Highway	111
	1. Development of the Project Highway	111
	2. [Rehabilitation / treatment and Augmentation]	111
	3. Specifications and Standards	111
	Annex-I: Description of [Two-Laning and Strengthening]	112
C	Project Facilities	123
	1. Project Facilities	123
	2. Description of Project Facilities	
D	Specifications and Standards	124
	1. Construction	124
	2. Design Standards	124
	Annex-I: Specifications and Standards for Construction	125
	1. Specification and Standard	125
	2. Deviations from the Specifications and Standard	125
E	Maintenance Requirements	155
	1. Maintenance Requirements	155
	2. Repair/Rectification of Defects and Deficiencies	155
	3. Other Defects and Deficiencies	155
	4. Extension of Time Limit	155
	5. Emergency Repairs/Restoration	155
	6. Daily Inspection by the Contractor	156
	7. Pre-monsoon Inspection/Post-monsoon Inspection	156
	8. Repairs on Account of Natural Calamities	156
	Annex-I:Repair/rectification of Defects and Deficiencies	157
F	Applicable Permits	160
	1. Applicable Permits	160
G	Annex-I: Form of Guarantee for Performance Security	161
	Annex-II: Form of Guarantee for Withdrawal of Retention Money	164
	Annex-III:Form of Guarantee for Advance Payment	167
H	Contract Price Weightages	170
I	Drawings	174
	1. Drawings	174
	2. Additional Drawings	174
	Annex-I: List of Drawings	175
J	Project Completion Schedule	176
	1. Project Completion Schedule	176
	2. Project Milestone-I	176
	3. Project Milestone-II	176
	4. Project Milestone-III	176
	5. Scheduled Completion Date	176

	6. Extension of Time	176
K	Tests on Completion	177
	1. Schedule for Tests	177
	2. Tests	177
	3. Agency for Conducting Tests	177
	4. Completion Certificate	177
L	Provisional/ Completion Certificate	178-179
M	Payment reduction for non-compliance	180
	1. Payment Reduction for Non-compliance with the Maintenance Requirements	180
	2. Percentage Reductions in Lump Sum Payments	180
N	Selection of Authority's Engineer	181
	1. Selection of Authority's Engineer	181
	2. Terms of Reference	181
	3. Appointment of Government Entity as Authority's Engineer	181
	Annex-I: Terms of Reference for Authority's Engineer	182
O	Forms of Payment Statements	189
	1. Stage Payment Statement for Works	189
	2. Monthly Maintenance Payment Statement	189
	3. Contractor's Claim for Damages	189
P	Insurance	190
	1. Insurance during Construction Period	190
	2. Insurance for Contractor's Defects Liability	190
	3. Insurance Against Injury to Persons and Damage to Property	190
	4. Insurance to be in Joint Names	190

Schedules

SCHEDULE - A
(See Clauses 2.1 and 8.1)

SITE OF THE PROJECT

1 The Site

- 1.1 Site “Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement Nandprayag to Bhanerpani (Km 416.930 to 446.025) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and construction (EPC) Contract” Project shall include existing status of the land, buildings, structures and road works as described in Annex-I of this Schedule-A.
- 1.2 The dates of handing over the Right of Way to the Contractor are specified in Annex-II of this Schedule-A.
- 1.3 An inventory of the Site including the land, buildings, structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Contractor, and such inventory shall form part of the memorandum referred to in Clause 8.2.1 of this Agreement.
- 1.4 The alignment plans of the Project sites are specified in Appendix-B1, where the restoration / rehabilitation / treatment work of landslide and Sinking zone is contemplated.
- 1.5 The status of the environment clearances obtained or awaited is given in Annexure IV.
- 1.6 The subject project is excluding of highway construction work. All the works are exclusive of carriage way, shoulder and drain, which is a part of existing highway contract.

Annex - I
(Schedule-A)

SITE

1. The Site for the Project comprises the section of National Highway-07 for Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement Nandprayag to Bhanerpani (Km 416.930 to 446.025) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and construction (EPC) Contract. The land, carriageway and structures comprising the site are described below:

2. Land

The Site of the Project comprises the land described below. The project work is exclusive of highway construction project.

S.No	Name of Landslide	Chainage (Km)		Total length (m)	Remarks
		From	To		
1-L	Nandprayag	416.930	417.300	370	
2-L	Pursari	420.850	420.960	110	
3-L	Chamoli	427.000	427.300	300	
4-L	Khetrapal	429.130	429.350	220	
5-L	Kaudia	437.800	437.865	65	
6-S	Gadora-1	439.175	439.570	395	
7-S	Gadora-2	439.900	440.310	410	
8-S	Pipalkoti-01	445.560	445.710	150	
9-L	Bhanerpani	445.950	446.025	75	
10-L	Pipalkoti-02	445.710	445.770	60	
11-L	Pakhi	452.300	452.500	200	
12-L	Patalganga	455.870	455.930	60	

3. Carriageway

The present carriageway of the Project is being developed by other agencies and not part of this project.

4. Culverts

The Site has the following culverts:NA

Sl. No.	Name of Landslide	Chainage (km)	Type of Culvert	Span /Opening with span length (m)	Width (m)
1	NA				

5. Road side drains:- NIL

Road side drains being executed by other agencies under highway contract

S. No.	Name of Landslide	Location		Side of Road	Type	
		From km	to km		Masonry/cc (Pucca)	Earthen(Kutcha)
1	NA					

6. Railway Lines

Not Applicable

(Annexure-I to Schedule-A)

(i) Electrical utilities

The site includes the following electrical utilities:

(a) Extra High Tension Lines (EHT Lines)*

NIL

(b) High Tension/Low Tension Lines (H/LT Lines) *

NIL

(c) Public Health utilities (Water/ Sewage Pipe lines) *

NIL

(iii) Any other line

NIL

(* This is illustrative and may change as per feature of existing utilities)

Annex - II

(Schedule-A)

DATES FOR PROVIDING RIGHT OF WAY

The dates on which the Authority shall provide Right of Way to the Contractor on different stretches of the Site are stated below:

S. No.	Name of Landslide	Location		Length (m)	Slaight height	Date of providing ROW*
		From km	to km			
1-L	Nandprayag	416.930	417.300	370	78	On appointed date
2-L	Pursari	420.850	420.960	110	45	On appointed date
3-L	Chamoli	427.000	427.300	300	72	On appointed date
4-L	Khetrapal	429.130	429.350	220	62	On appointed date
5-L	Kaudia	437.800	437.865	65	55	On appointed date
6-S	Gadora-1	439.175	439.570	395	45	On appointed date
7-S	Gadora-2	439.900	440.310	410	20	On appointed date
8-S	Pipalkoti-01	445.560	445.710	150	20	On appointed date
9-L	Bhanerpani	445.950	446.025	75	80	On appointed date
10-L	Pipalkoti-02	445.710	445.770	60	78	On appointed date
11-L	Pakhi	452.300	452.500	200	48	On appointed date
12-L	Patalganga	455.870	455.930	60	58	On appointed date

Annex - IV
(Schedule-A)

ENVIRONMENT CLEARANCES

The environment clearances for this work are not required as per MOEF gazette notification No. S.O.2559 (E dated 22.08.2013).

.

SCHEDULE - B
(See Clause 2.1)

DEVELOPMENT OF THE PROJECT HIGHWAY

Development of the Project Highway is not part of this project.

1 Development of the Project

Development of the project shall include design and construction of the Rehabilitation/Treatment of landslide and sinking zones at 9 locations as specified in Annexure-I of schedule-B.

2 Rehabilitation / treatment / Restoration and augmentation

Rehabilitation / treatment and augmentation shall including, hill slope with proper drainage works as described in schedule-B.

3 Specifications and Standards

The Project Rehabilitation/Treatment of Landslide conformity with the specification and standards specified in Annexure-I of schedule-D.

Annex - I
(Schedule-B)

DESCRIPTION OF THE PROEJCT

1 Widening of the existing highway

NA

2.0 Geometric design and general features

2.1 The alignment of project work shall follow the proposed alignment of the project work

2.2 Alignment of Protection work

The alignment plan of the project shall be in accordance with Appendix-B1 of this schedule.

2.3.1 For the purpose of setting out coordinates of the proposed center line of the project shall be as per Appendix-B2.

2.3.2 Features of Landslide and Sinking Zone works



Protection work shall be provided for the following stretch:-



stretches of the Site are stated below:



S. No.	Name of Landslide	Location		Length (m)
		From km	To km	
1-L	Nandprayag	416.930	417.300	370
2-L	Pursari	420.850	420.960	110
3-L	Chamoli	427.000	427.300	300
4-L	Khetrupal	429.130	429.350	220
5-L	Kaudia	437.800	437.865	65
6-S	Gadora-1	439.175	439.570	395
7-S	Gadora-2	439.900	440.310	410
8-S	Pipalkoti-01	445.560	445.710	150
9-L	Bhanerpani	445.950	446.025	75
10-L	Pipalkoti-02	445.710	445.770	60
11-L	Pakhi	452.300	452.500	200
12-L	Patalganga	455.870	455.930	60



2.4 Typical Cross-sections of Treatment area



The typical cross sections for each landslide treatment and Sinking zone treatment is given include Appendix-B1.

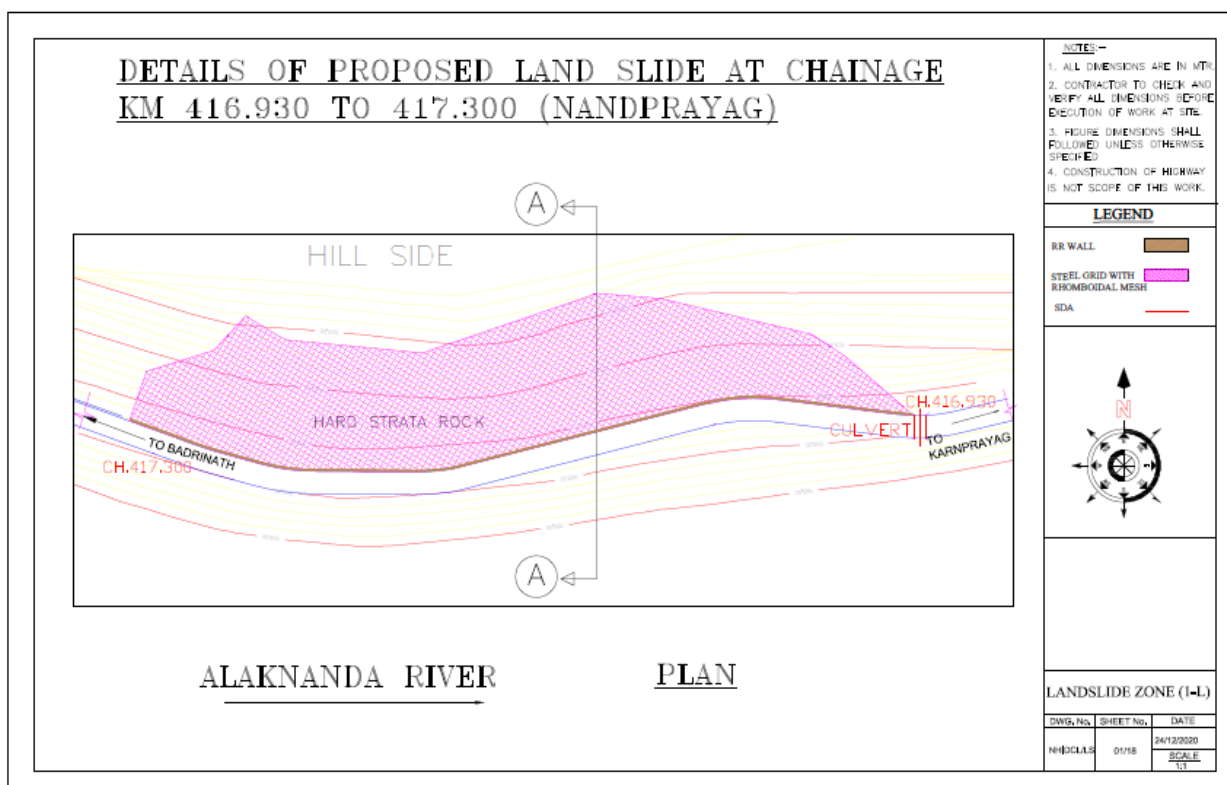
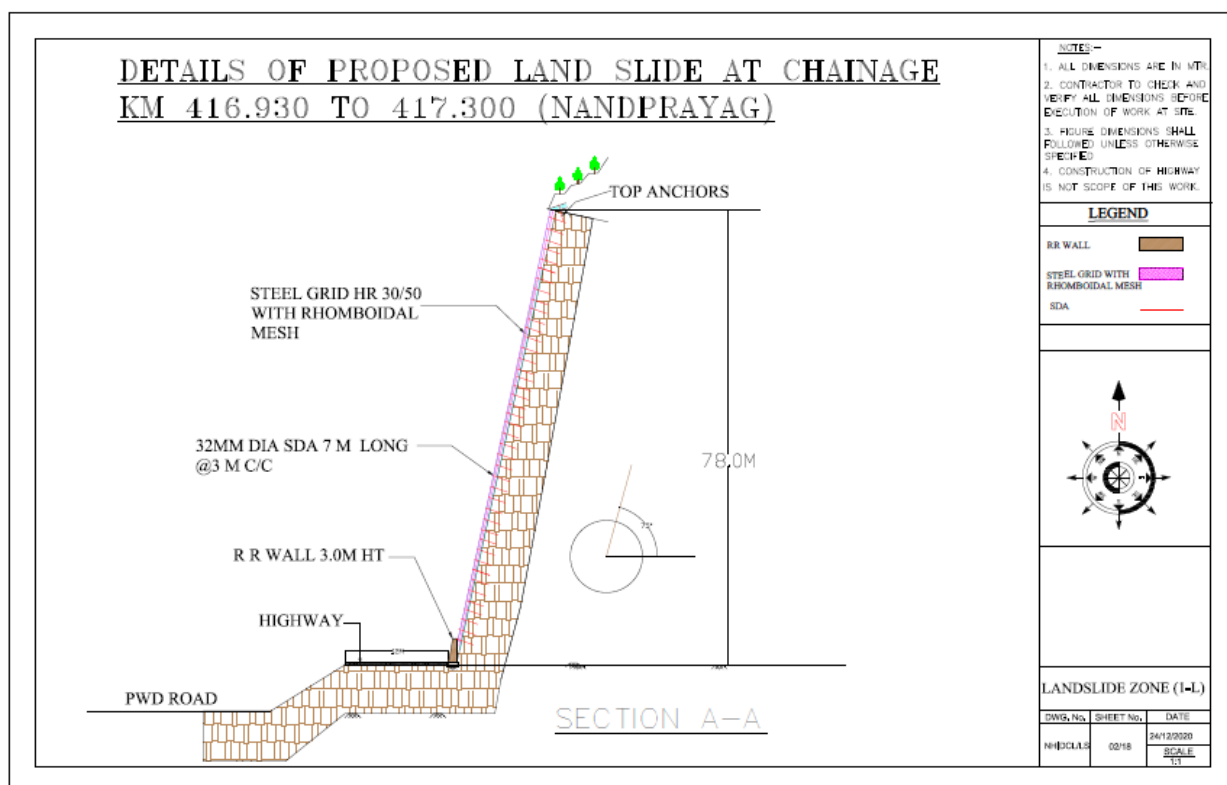


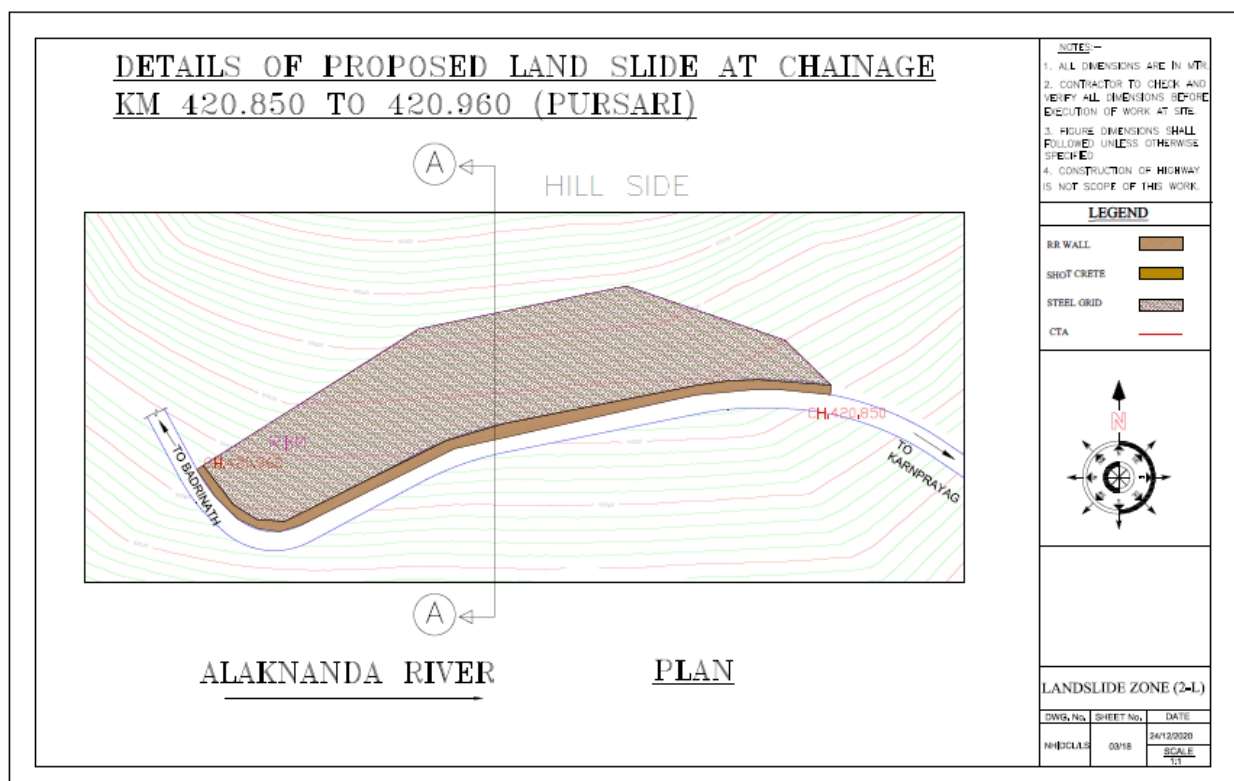
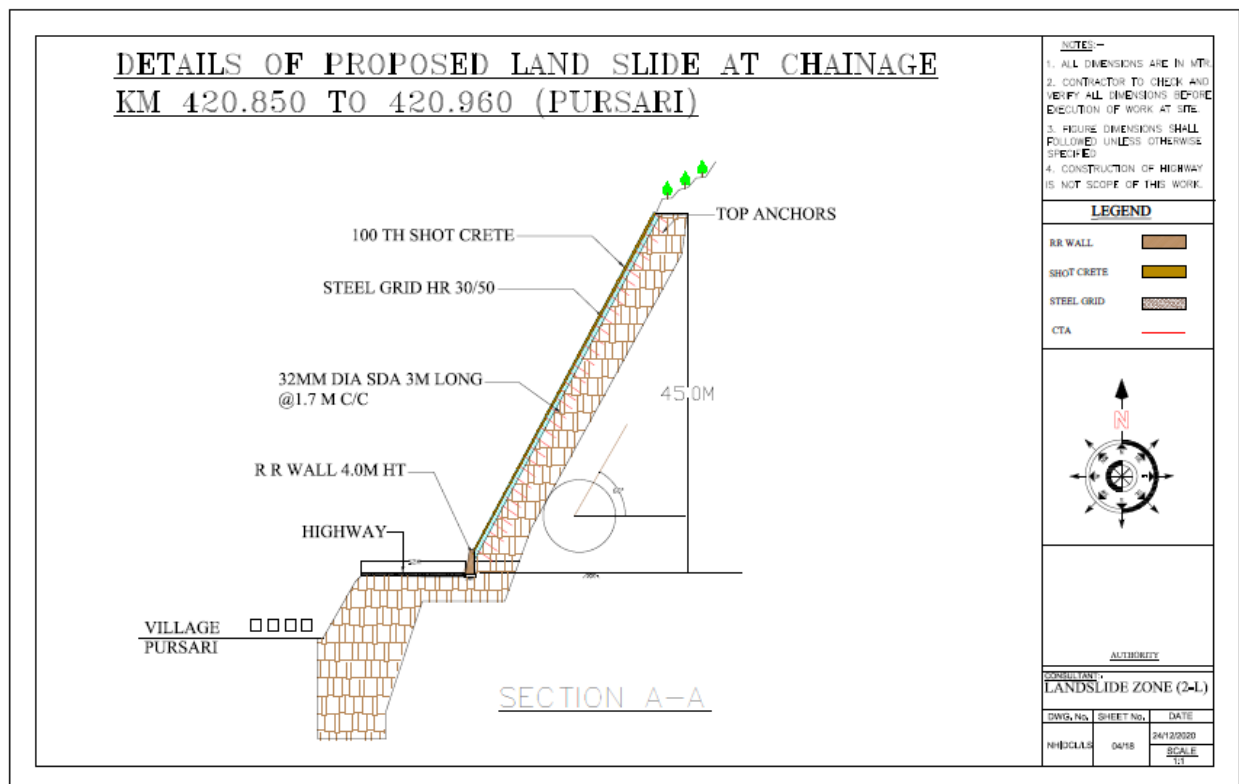


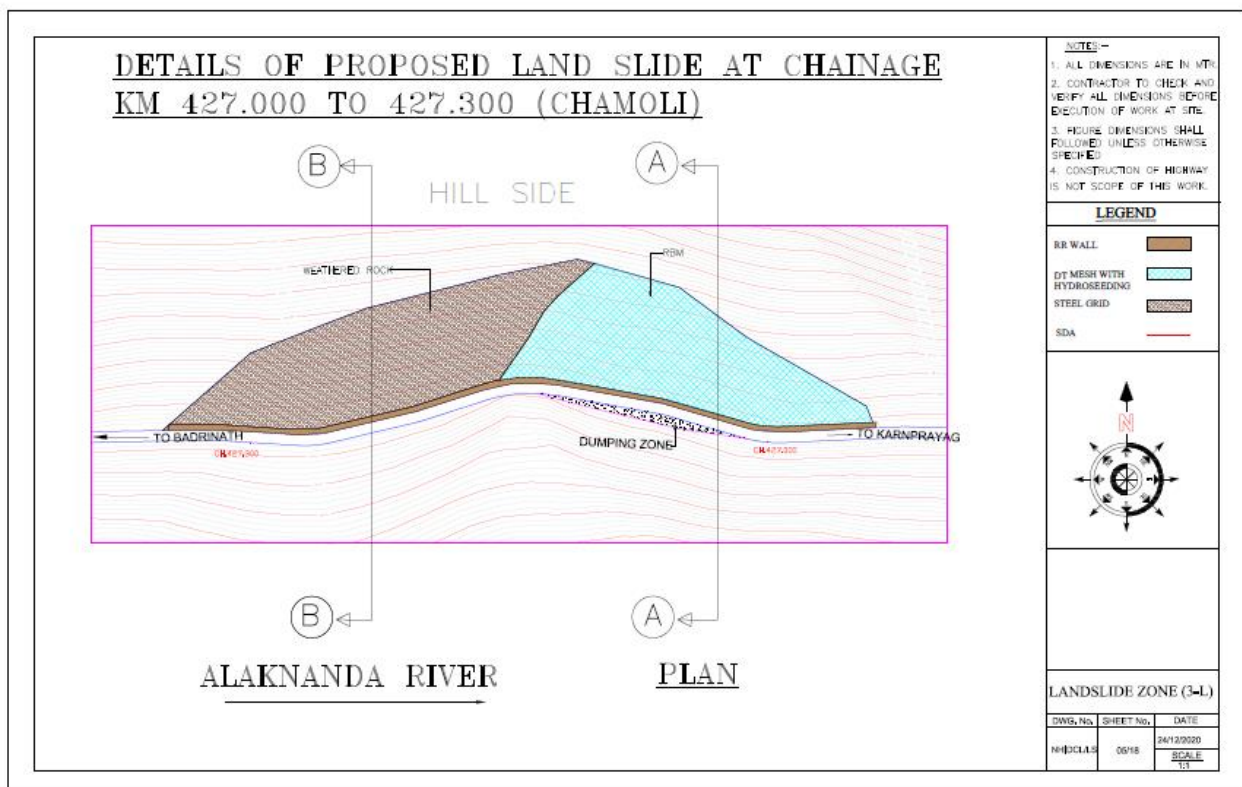
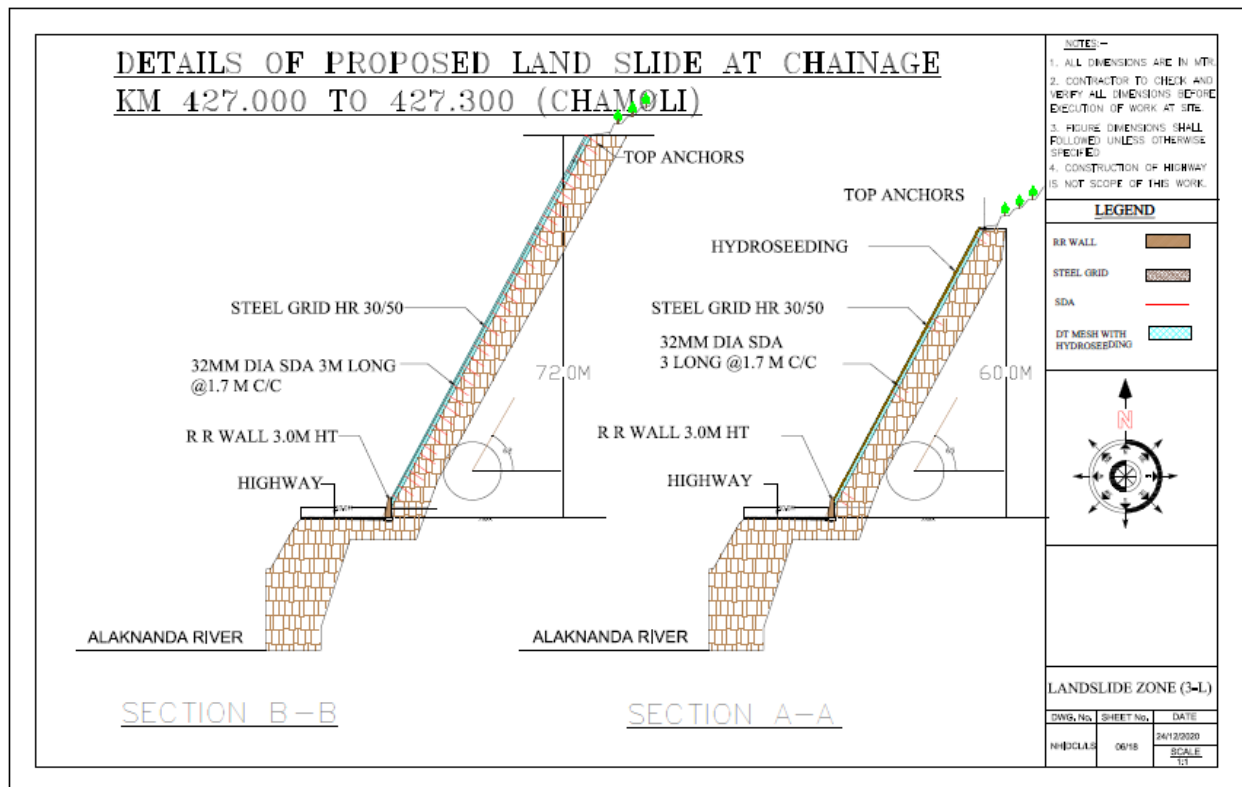


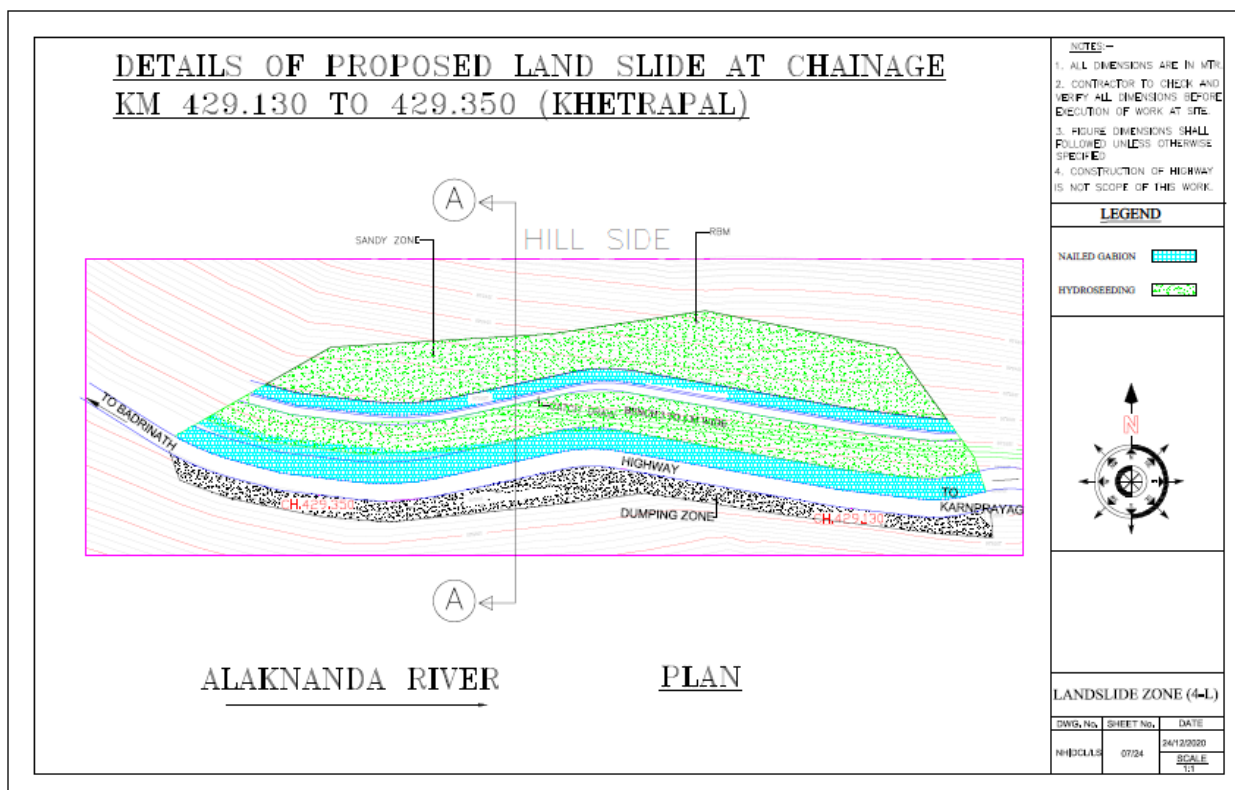
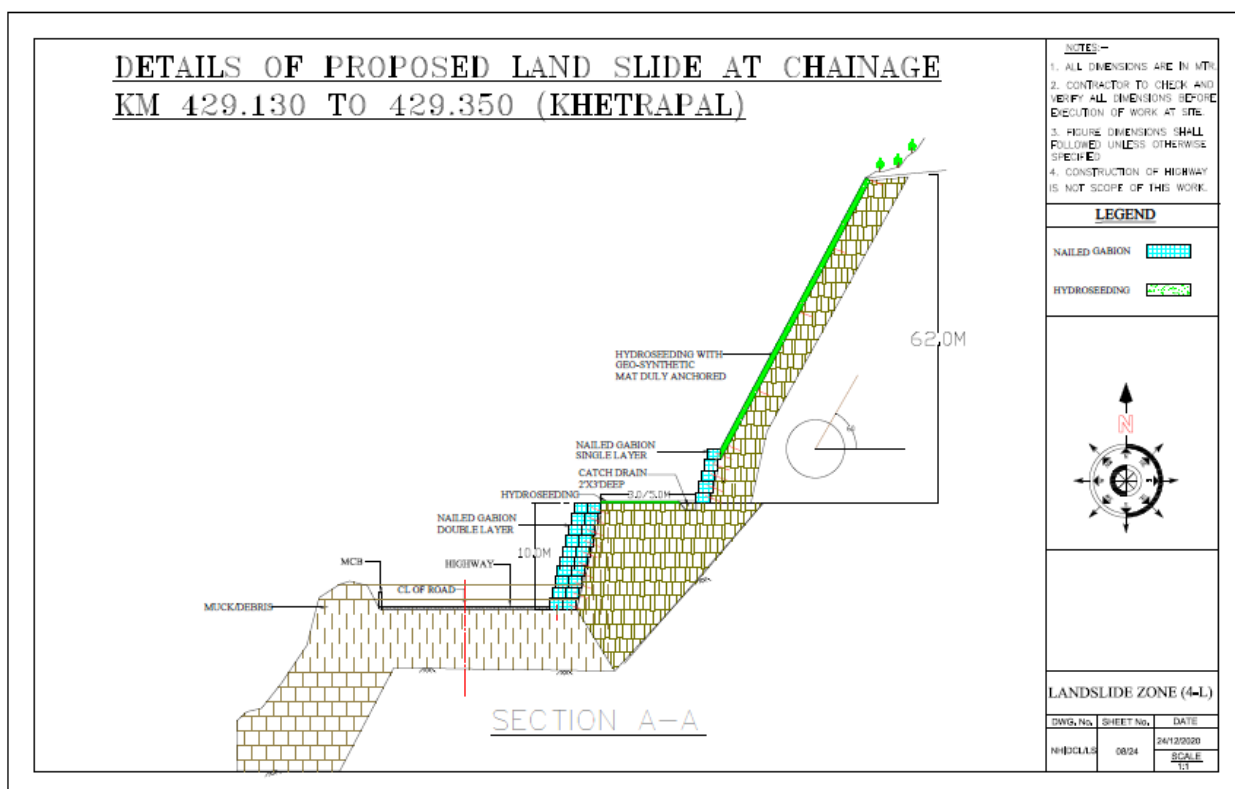


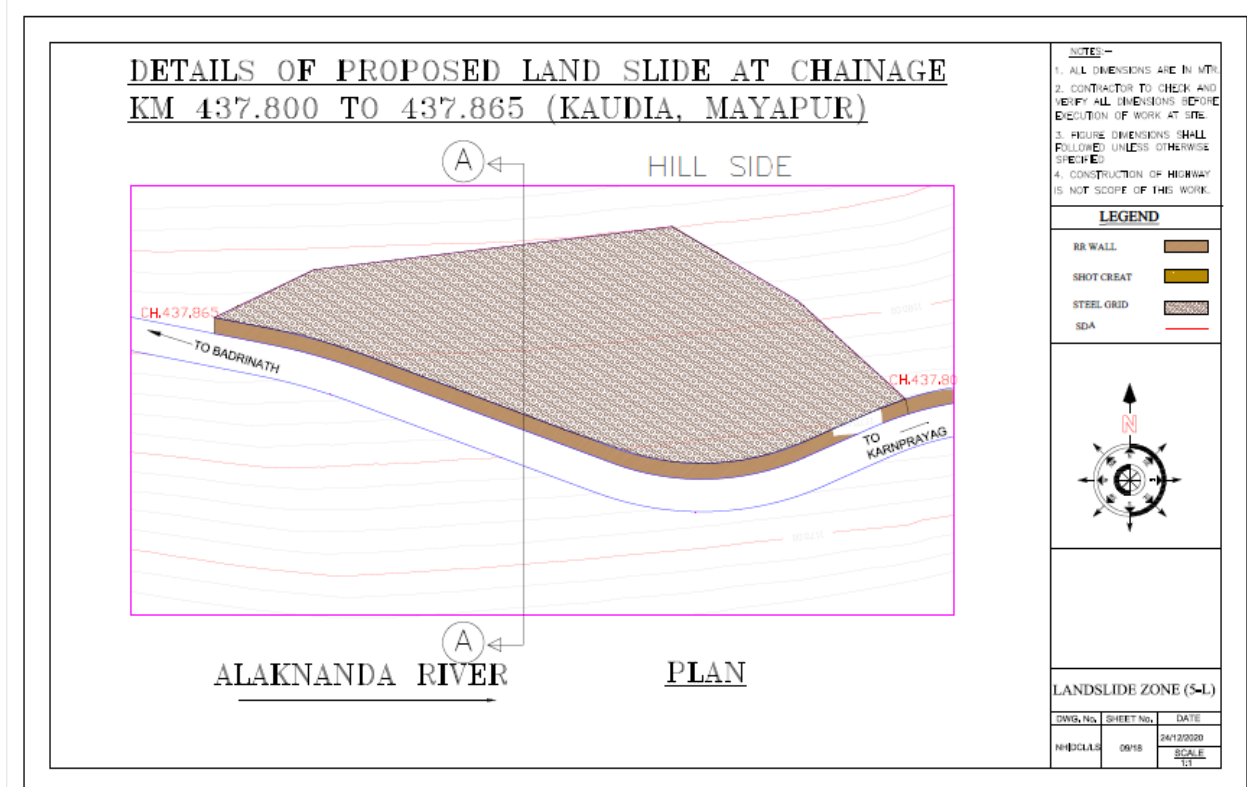
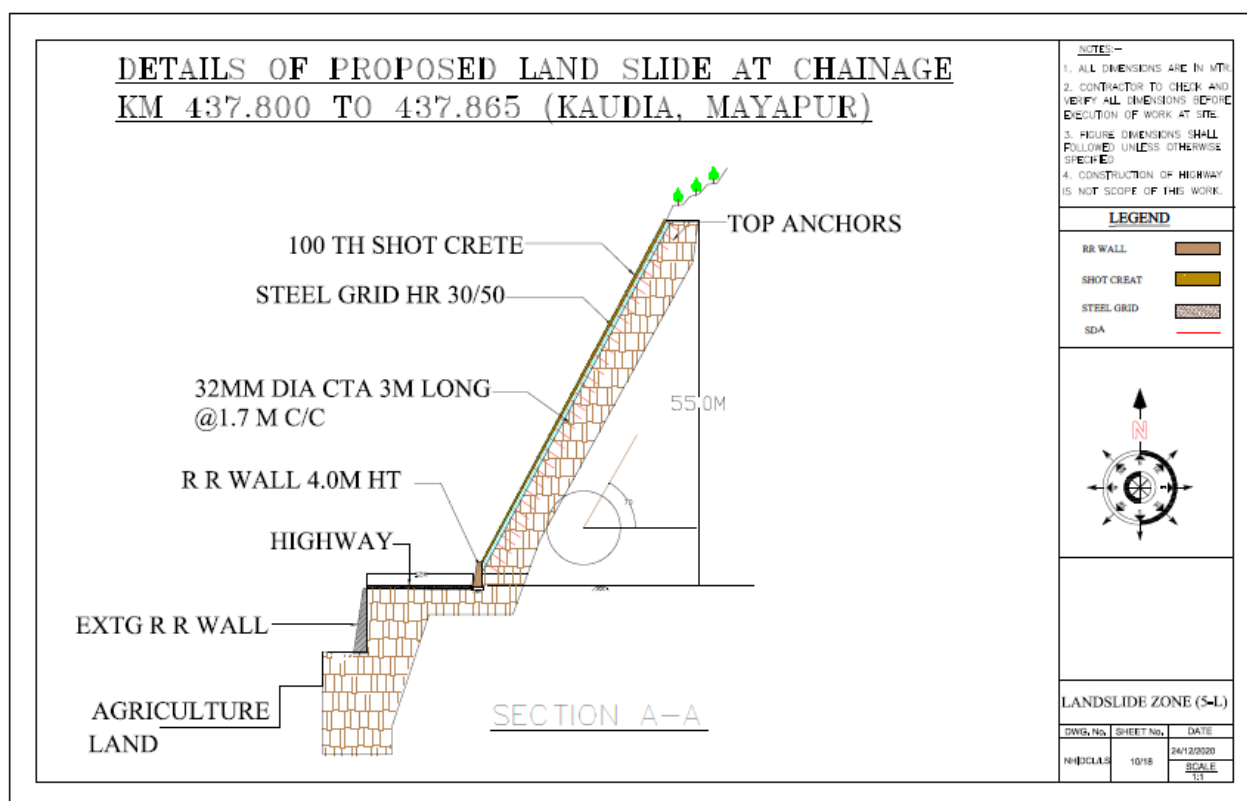


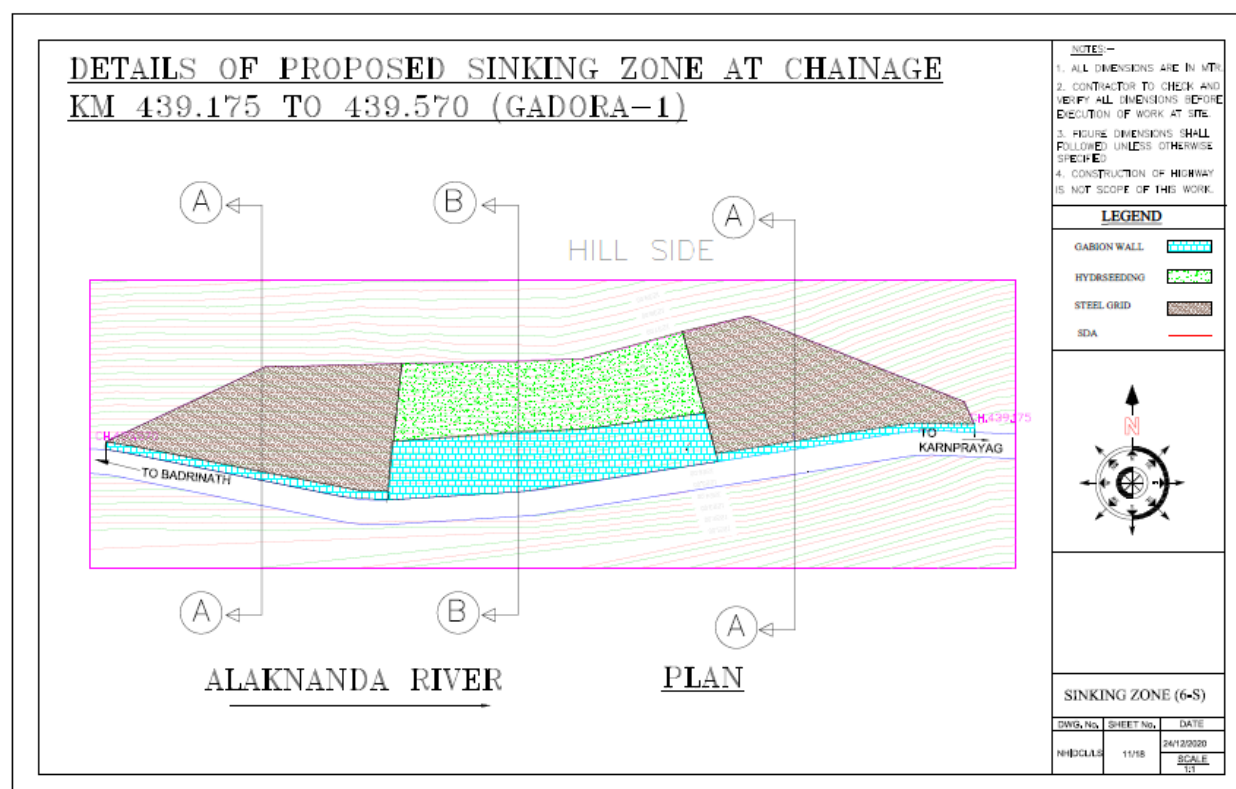
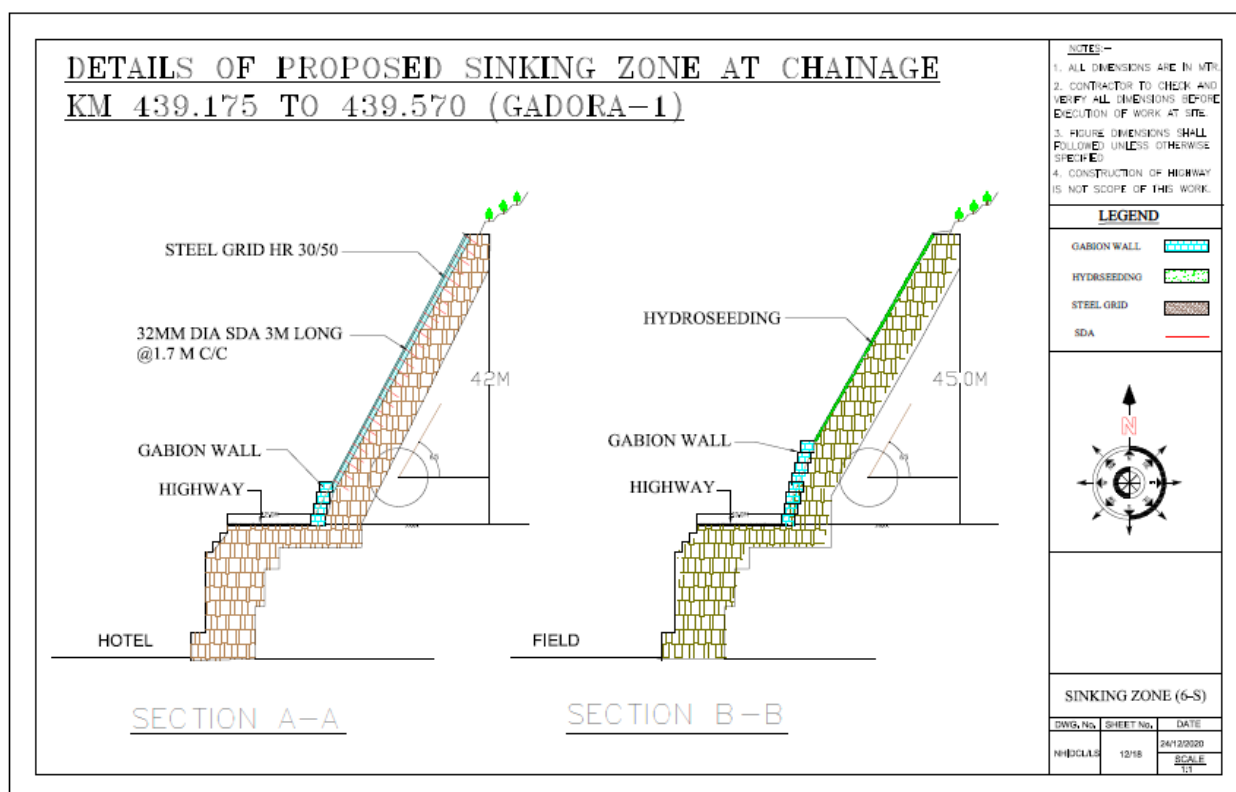


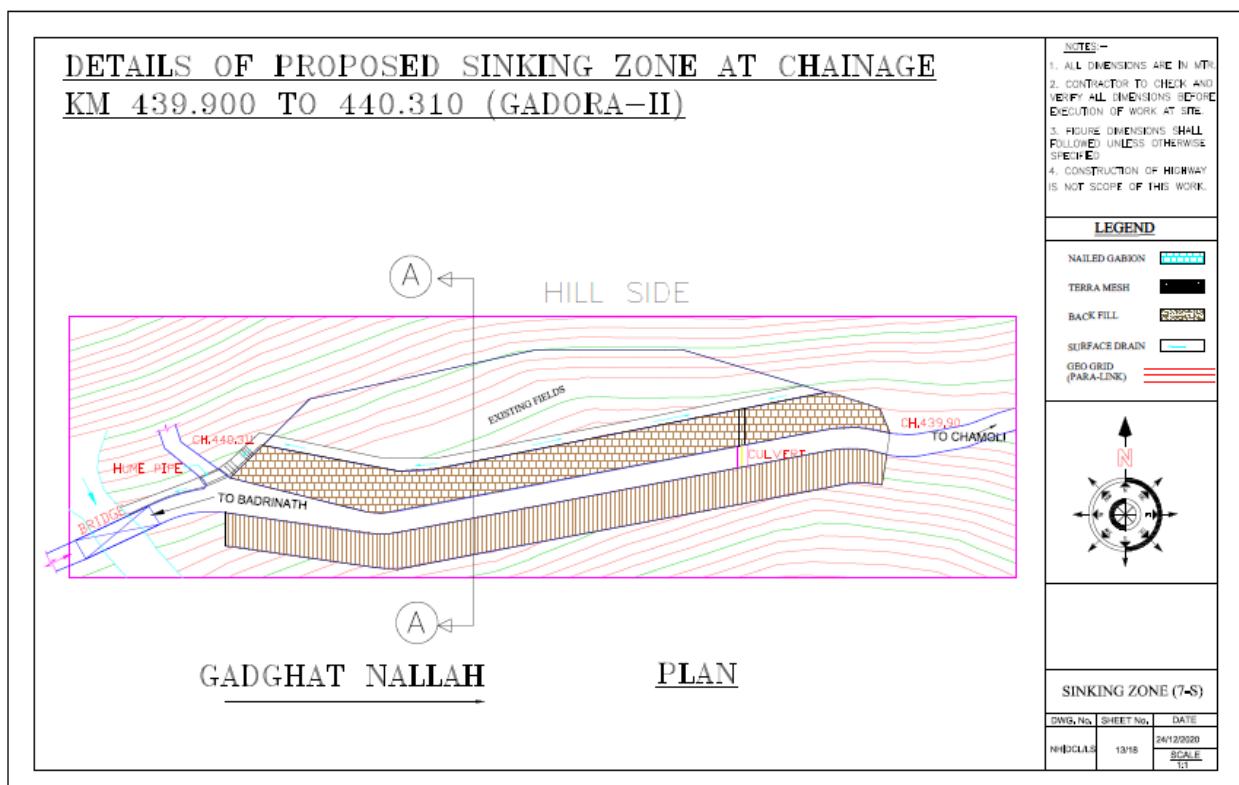
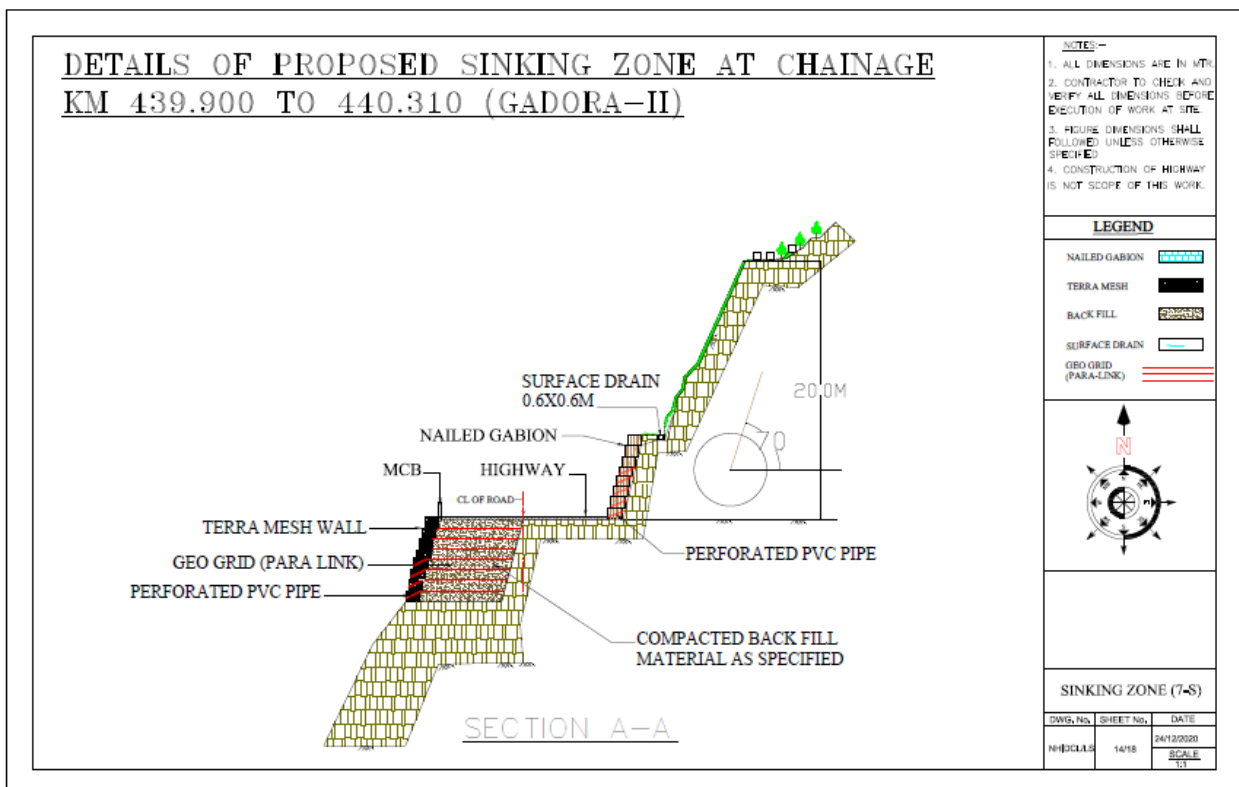


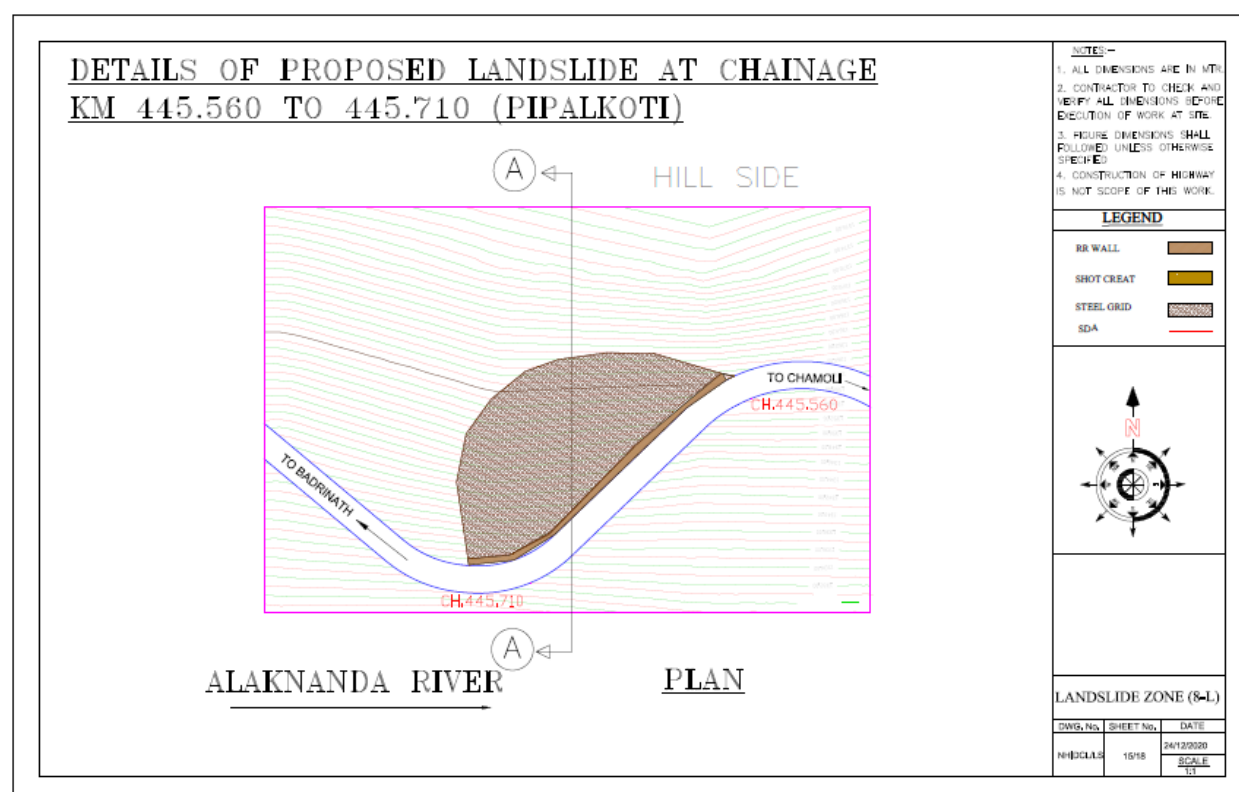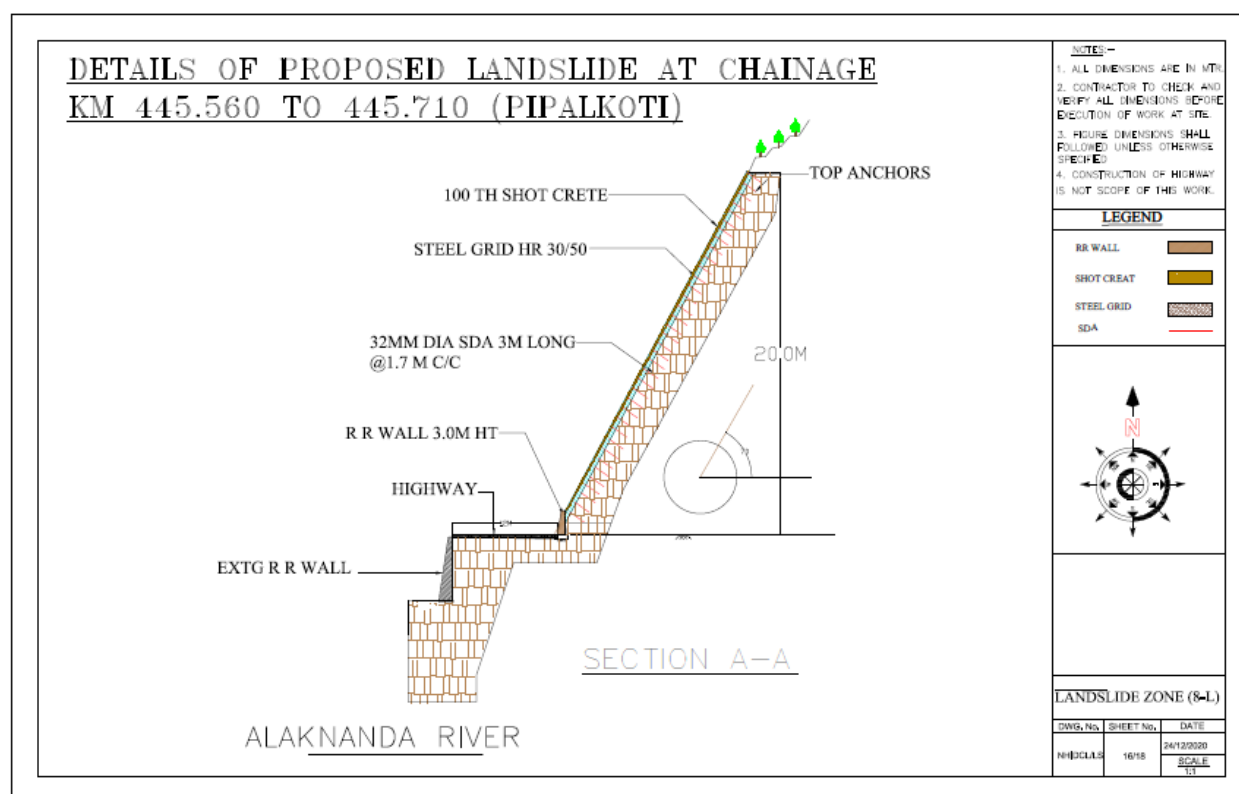

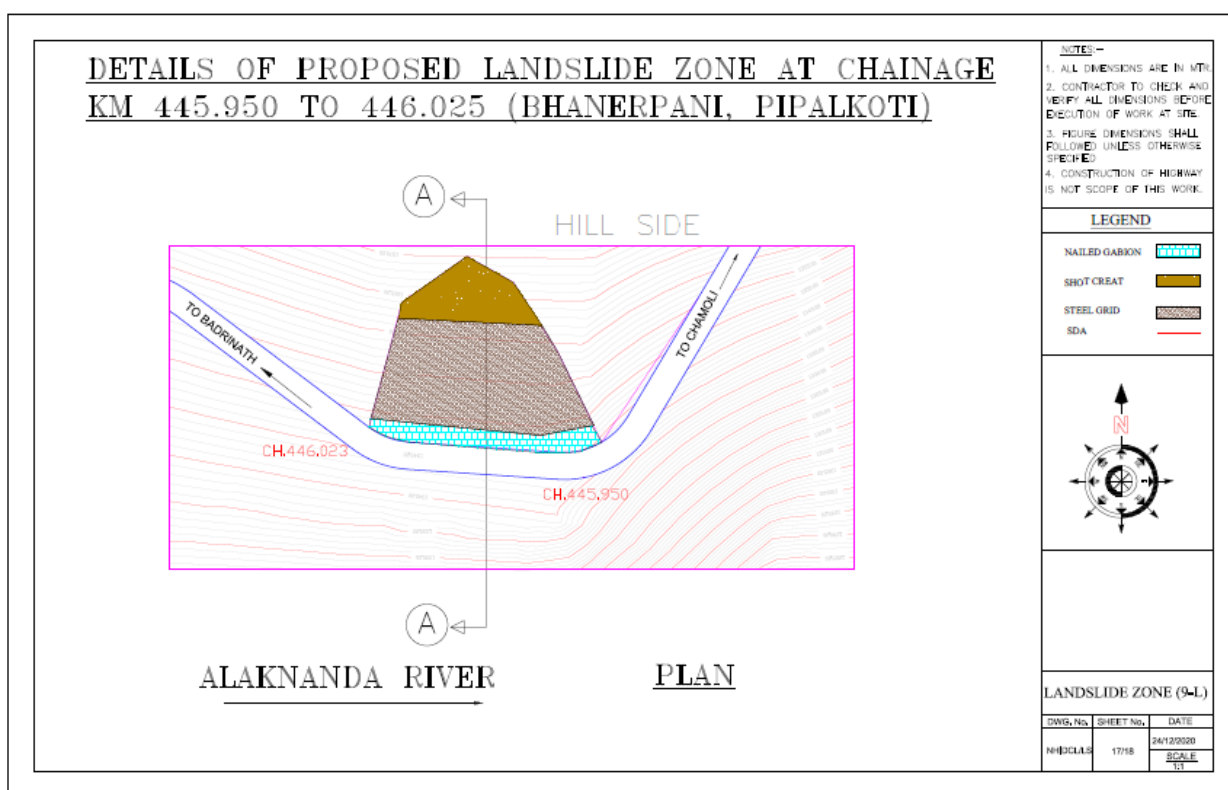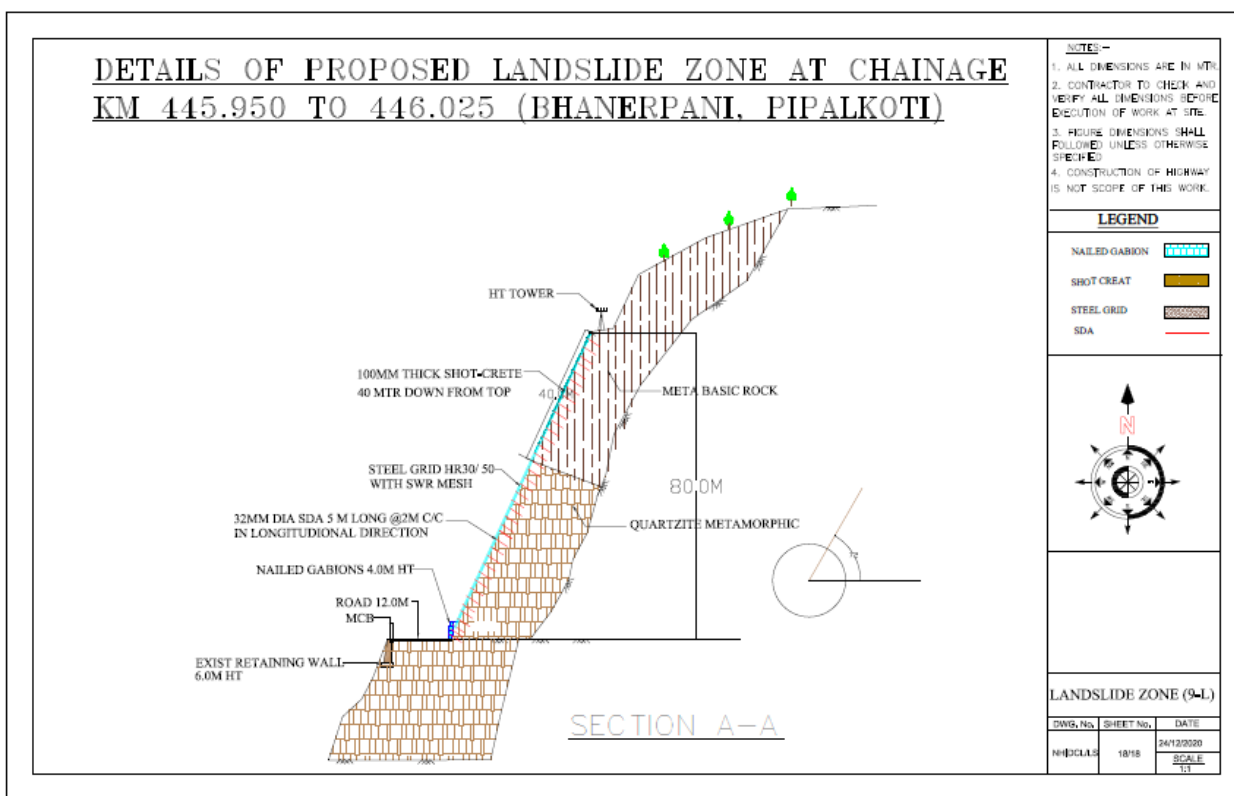

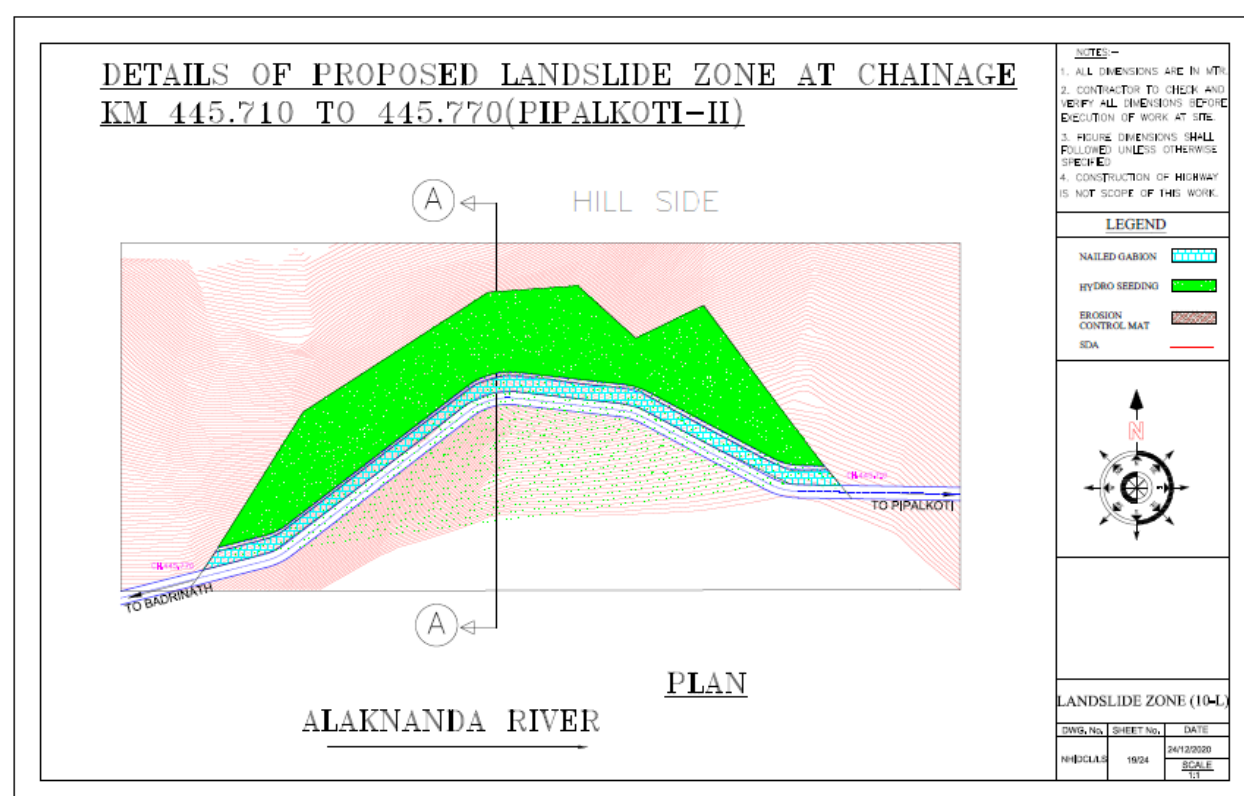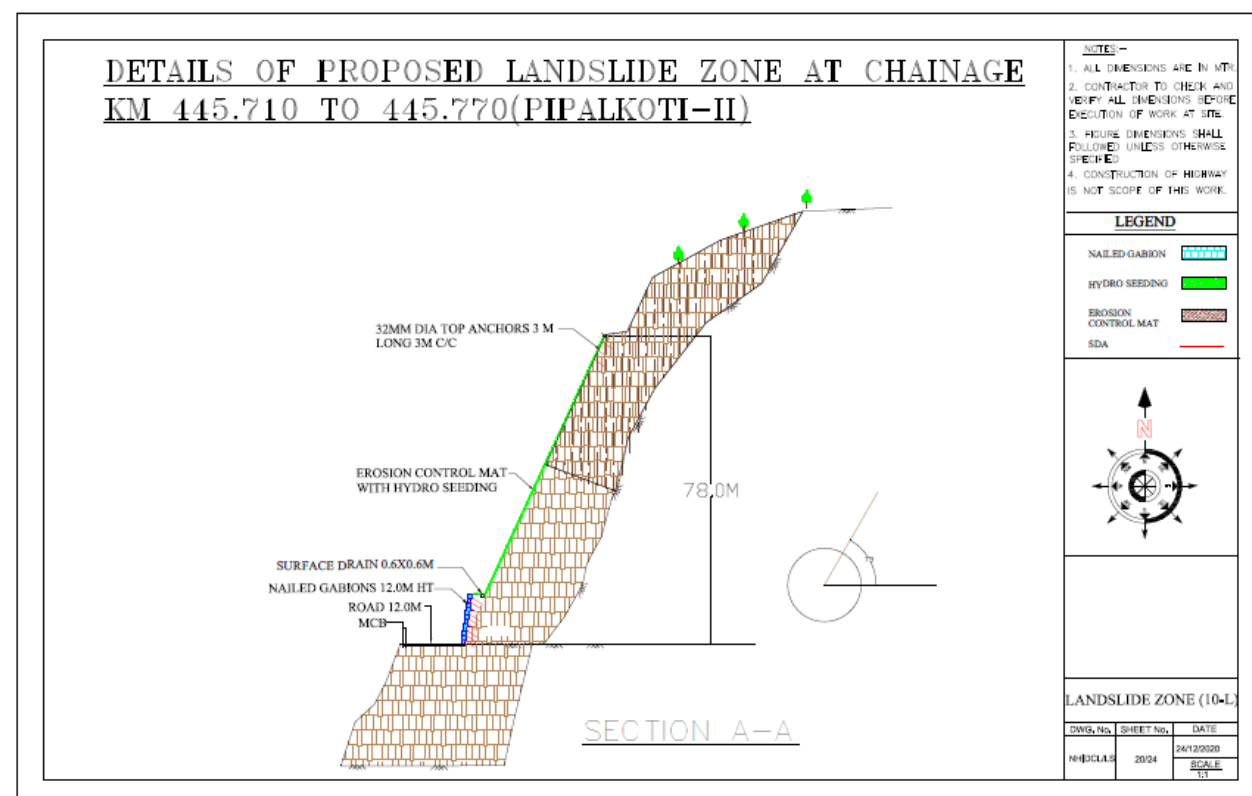

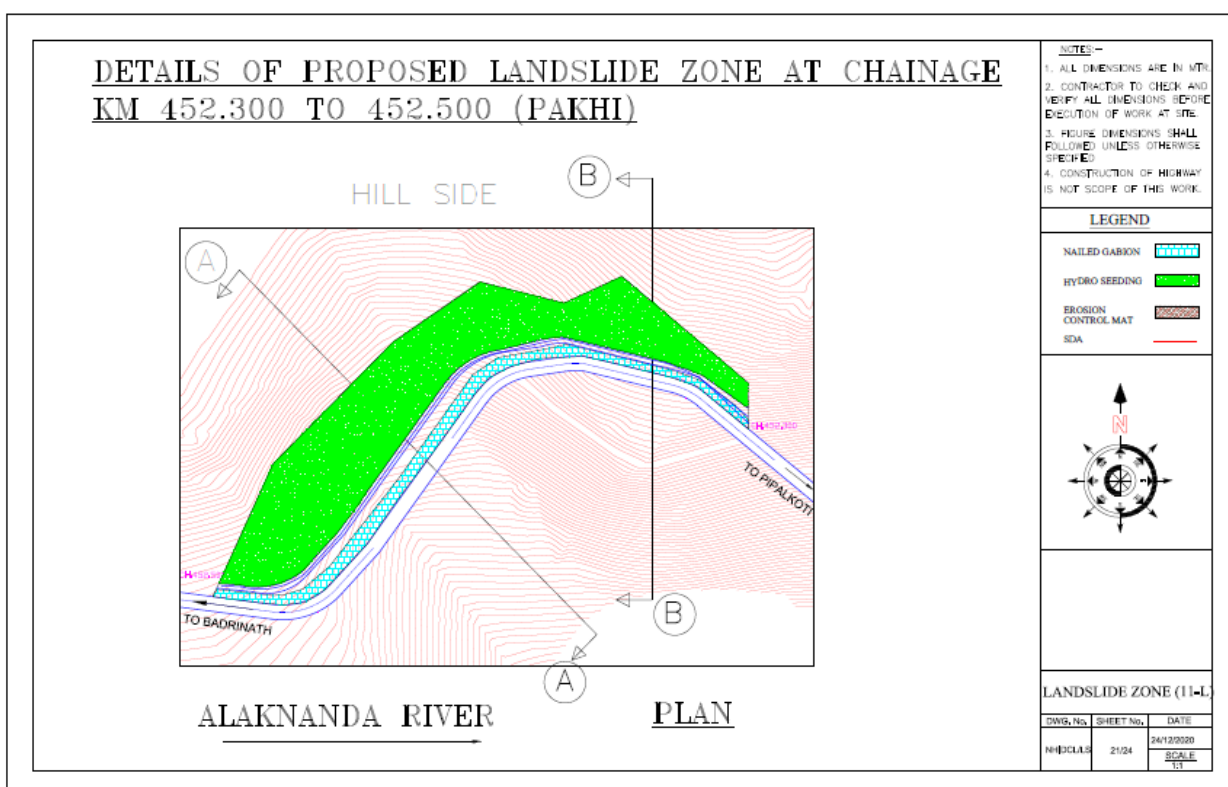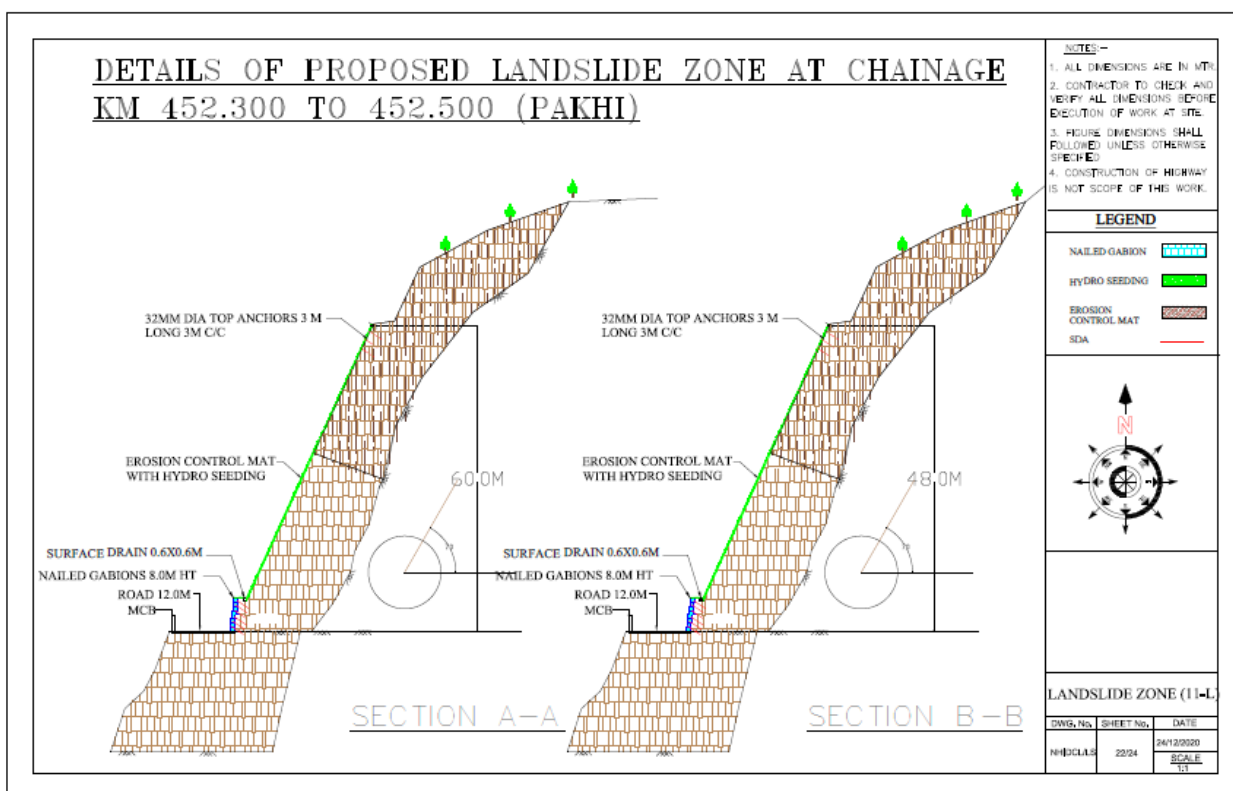

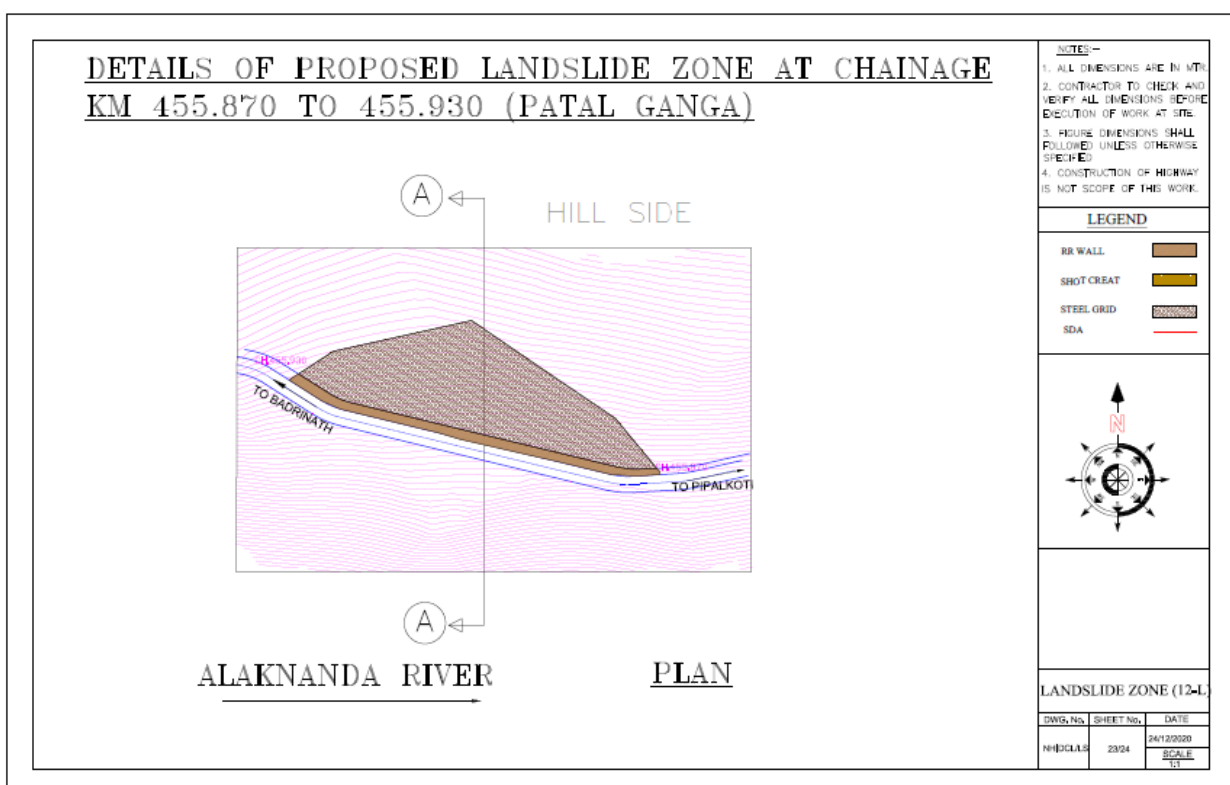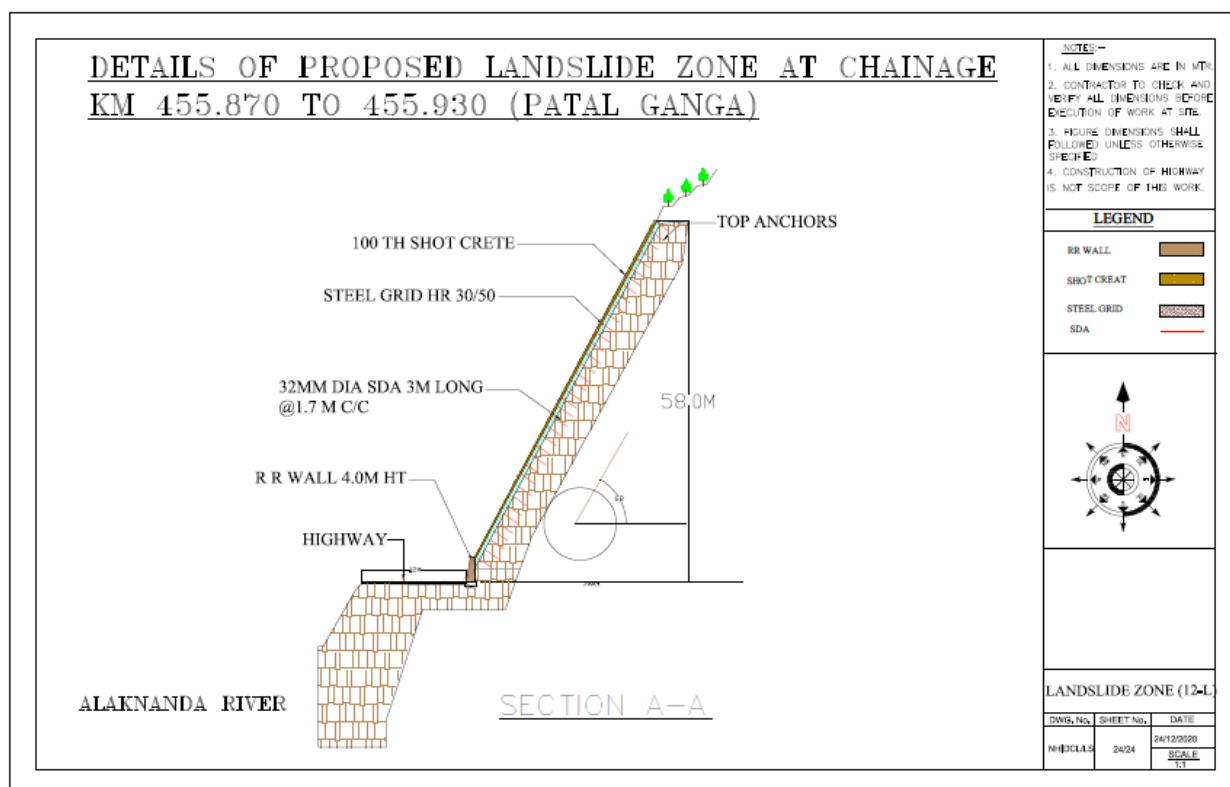

General Arrangement of proposed protection work is presented in Appendix-B1. The protection arrangement shown is indicative only. Contractor shall submit detailed design and drawing along with the requisite field investigation and test reports like geophysical investigation, geotechnical investigations, topographic survey, and hydrological survey etc. to Authority Engineer and shall obtain approval for the design before execution. Any change in location shall be subject to approval from Authority Engineer.

2.5 Instrumentation of Monitoring

Following monitoring instruments shall be provided at Landslide protection work

Protection work height range	Type of Instrument	
	Piezometer	Inclinometer
Upto 25 m	2 nos.	3 nos.
25 m to 40 m	2 nos.	3 nos.
40 m to 60 m	2 nos.	6 nos.

Note:- At Gadora-1, Gadora-2 and Khetarpal sites following additional instruments be provided:-

S.N.	Instruments	Nos.
1	Reflector	2 nos.
2	Stain Gauges	2 nos.
3	Load Cell	2 nos.

3 ROAD EMBANKMENT AND CUT SECTION

3.1 NA

3.2 Type of Instrumentation

<u>Type of Instrumentation</u>		
Sl.No.	Type of instrument	Numbers
1	Reflector	Type: bi-reflex target model Measuring Range (m): 12m to 140m (Maximum measuring distance is highly dependent on atmospheric conditions and EDM Model used) Manufacturing Accuracy: ± 0.1 mm Overall Accuracy: ± 1 mm (within the measuring section) The targets must be replaceable without loss of accuracy.
2	Strain Gauges	Standard Type with Accuracy
3	Inclinometer	Type: Vertical In-Place Inclinometer system (with sensors) Accuracy: $+ 0.1\%$ fs (as tested under lab conditions) Range (degree): 15 0 Temperature Limit: -20 0C to 80 0C
4	Piezometer	Type: Vertical In-Place Inclinometer system (with sensors) Accuracy: $+ 0.1\%$ fs (as tested under lab conditions) Range (degree): 15 0 Temperature Limit: -20 0C to 80 0C
5	Load Cell	Type: Vibrating wire type earth pressure cell Accuracy: $+ 0.5\%$ fs normal Range (MPa): 0.5MPa -10MPa Resolution: 10 kPa (with read-out unit) Operating temperature range: -10 to 70oC Compensated temperature range: 0 to 55 oC Over Range Limit: 150% of range (Maximum over pressure without damage)

4 PAVEMENT DESIGN

NA

5 ROADSIDE DRAINAGE

NA

6 DESIGN OF STRUCTURES

i. Construction of Major bridges

S.No	Bridge at km	Span Arrangement (m)	Remarks
NIL			

ii. Construction of Minor bridges:

Sl.No	Bridge at km	Span Arrangement (m)	Remarks
NIL			

iii. Construction of Viaduct (NA)

Sl.	Start Ch ai na ge	End Ch ai na ge	Span Arrangeme nt upto Expansion joint (m)	Type	Remark
Nil					

iv. Widening of Existing bridges

S.No	Bridge at km	Span Arrangement (m)	Remarks
NIL			

7 TRAFFIC CONTROL DEVICES AND ROAD SAFETY WORKS

NA

8 ROADSIDE FURNITURE

NA

9 HAZARDOUS LOCATIONS

NA

10. COMPULSORY AFFORESTATION

NIL

11. HAZARDOUS LOCATIONS

NIL

12 SPECIAL REQUIREMENT FOR HILL ROADS

NA

13 CHANGE OF SCOPE

The length of proposed restoration / rehabilitation / treatment specified hereinabove shall be treated as minimum requirement. The actual lengths as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule-B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of Article 13

NOTE:

1. The Contractor shall be responsible for accurate assessment/investigations of the site situation and prepare design for slope protection as per specifications and standards stipulated in the Schedule-D of the Agreement on its own cost and submit the same to the Authority's Engineer/Authority for review through Proof Consultant and implement it accordingly.
2. Any increase in quantity over and above the tentative quantity as mentioned in above table or through change in specifications will not be considered as change of scope. Therefore, Contractor shall make through investigations at site on its own cost and assess the requirement of slope protection and slide prone zone and other safety features before submission of bid.

Annexure-I to Schedule-B1

Utility Shifting:

Not required

Coordinantes of proposed center line of road is given in Appendix-B2.

S. No.	Name of Landslide	Location		Co-ordinate			
		From km	To km	Easting From	Northing To	Easting From	Northing To
1-L	Nandprayag	416.930	417.300	30.330405	79.31658	30.329347	79.318588
2-L	Pursari	420.850	420.960	30.348514	79.32059	30.349003	79.319908
3-L	Chamoli	427.000	427.300	30.394367	79.326086	30.396109	79.326812
4-L	Khetrapal	429.130	429.350	30.405712	79.342003	30.406366	79.343402
5-L	Kaudia	437.800	437.865	30.412191	79.412353	30.411689	79.412634
6-S	Gadora-1	439.175	439.570	30.41643	79.423541	30.416817	79.424823
7-S	Gadora-2	439.900	440.310	30.418254	79.429053	30.419025	79.430298
8-S	Pipalkoti-01	445.560	445.710	30.449634	79.428554	30.45032	79.428734
9-L	Bhanerpani	445.950	446.025	30.452574	79.428561	30.453126	79.428547
10-L	Pipalkoti-02	445.710	445.770	30.450321	79.425734	30.451874	79.429281
11-L	Pakhi	452.300	452.500	30.465601	79.457741	30.46713	79.458142
12-L	Patalganga	455.870	455.930	30.486763	79.476484	30.486552	79.476946

SCHEDULE- C
(See Clause 2.1)

PROJECT FACILITIES

NIL

SCHEDULE - D
(See Clause 2.1)

SPECIFICATIONS AND STANDARDS

1 Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project.

2 Design Standards

The Project including Project Facilities shall conform to design requirements set out in the following documents:

Manual of Specifications and Standards for Two Laning of Highways (IRC: SP: 73-2015), referred to herein as the Manual

As regards, the work of utility shifting, the relevant specification, relevant rules, regulations and acts of Utility Owning Department/Agencies shall be applicable.

Annex - I
(Schedule-D)

SPECIFICATIONS AND STANDARDS FOR CONSTRUCTION

1 Specifications and Standards

All Materials, works and construction operations shall conform to the Manual of Specifications and Standards for Two-Laning of Highways (IRC:SP:73-2007), referred to as the Manual MORTH Specifications for Road and Bridge Works, Fifth Revision 2013, Relevant British standards and FHWA standards. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

The following specification and standard as laid down in various documents listed below be referred and the design and project facilities should confirm to the requirements given in these specifications:-

- a. BS 8006-1:2010-Code of Practice for Strengthened/Reinforced Soil and other fills. The structure category is considered as 3 (High) and design temperature is considered as 20. BS 8006 (2010) – is suggested by MORTH as the first priority code (refer annexure to section 3100 A1-1.1) to be considered.
- b. FHWA-NHI-10-24 – Design and Construction of mechanically stabilized earth walls and reinforced soil slopes –Volume-I (For seismic loading condition).
- c. HRB-Special report-23. State of Art: Design and Construction of Rock fall Mitigation System, 2014.
- d. HRB-15 : State of Art : Landslide correction technique.
- e. Washington State Department of Transport (WSDOT) – Geotechnical Design manual, May 2015
- f. IRC-SP-48 : 1998 – “Hill Road Manual”.
- g. IRC-SP-42 – “Guidelines of Road Drainage”.
- h. IS 1893 (Part-3) : 2014 – Criteria for Earthquake Resistant Design of Structures.
- i. IRC:6-2014-Standard Specifications and Code of Practice for Road Bridges.
- j. IRC:SP:73-2015 – Manual of Specifications and Standards for two laning of Highways with Paved Shoulder.
- k. IRC:37:2012 – Guidelines for the design of flexible pavements.
- l. IRC:89-1997 – Guidelines for design and construction of river training and control works for road bridges.
- m. IRC:SP:13-2013 – Guidelines for the design of small bridges and culverts.

Notwithstanding above, certain specific details are given in succeeding paragraphs.

1.1 Gabions for Retaining Wall:


1.1.1 Description

This work shall consist of furnishing, assembling, and filling mechanically woven double twist hexagonal wire mesh gabions with rock as specified in the contract to the dimensions, lines and grades shown on the plans, or as determined by the engineer. These specifications are mainly in

accordance with Indian Standards IS 16014 and MoRTH (Fifth Revision) 2013, Clause 2500.

1.1.2 Material- Gabions

Fig. 1

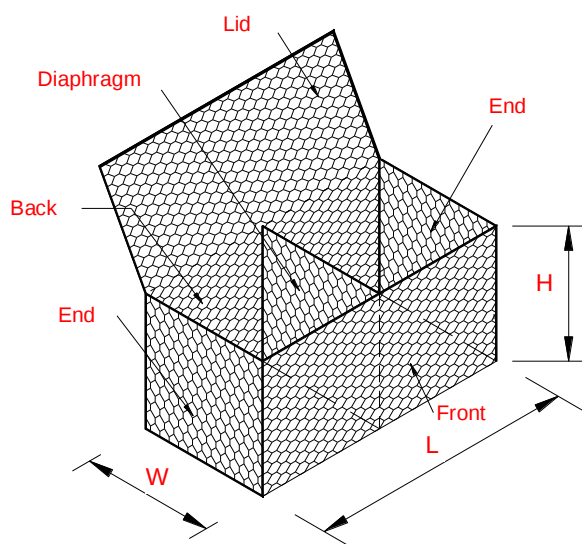

1.1.3 Wire:

All tests on the mesh, lacing wire and selvedge wire must be performed prior to manufacturing themesh.

Tensile strength: The wire used for the manufacture of Mesh shall have a tensile strength minimum 350 N/mm² in accordance with IS 280. Wire tolerances (Table 1) shall be in accordance with IS 16014:2012 (Class T1).

Elongation: Elongation shall not be less than 10%, in accordance with IS 16014:2012 and MoRTH(Fifth Revision) Clause 3100. Test must be carried out on a sample at least 20 cm long.

1.1.4 Internal Connecting Wires:

Cross Ties/ stiffener wire: Diameter 2.2 mm, Zn+ 10% Al alloy coated wire with PVC coating, 3.2mm when measured with PVC coating.

1.1.5 Zn+ 10% Al alloy Coating

- Zn+ 10% Al alloy coating: Minimum quantities of Zn+ 10% Al alloy shall be as shown in table in clause 1.2.6
- Adhesion of Zn+ 10% Al alloy coating: The adhesion of the Zn+ 10% Al alloy coating to the wire shall be such that, when the wire is wrapped ten turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers in accordance with IS 4826:1979.

1.1.6 PVC (Polyvinyl Chloride) Coating

PVC coating thickness: Nominal – 0.5 mm, Minimum – 0.38 mm;

Specific weight: 1.3 kg/dm³ – 1.35 kg/dm³ in accordance with ISO 1183.

Hardness: between 50 and 60 Shore D, according to ISO 868.

Tensile strength: Higher than 21 MPa, according to ISO 527

Elongation at break: not less than 200% in accordance with ISO 527.

1.1.7 Wire mesh (10x12 mesh type):

Mesh type	“D”(mm)	(Zn+ Al alloy) +PVC coated		
		Diameter of wire (Inner / Outer wire)		
		Mesh wire(mm)	Selvedge wire (mm)	Lacing wire(mm)
10X12	100mm	2.7/3.7	3.4/4.4	2.2/3.2

Mesh opening: Nominal Dimension D = 100, as per Fig. 2


Tolerances in Mesh Opening size: - 2% to +2%

DT mesh shall have minimum 10 numbers of mesh openings per meter of mesh perpendicular to twist of mesh.

Procedure for verification of mesh opening

- Gabion Box/Mattress shall be unfolded on the plain ground.
- Any shrink in the unfolded Gabion Mesh shall be removed, by stretching the Mesh panel.
- Marking on the ground shall be made from the Centre of the twist of one mesh and the second. Marking shall be done at 1 m distance.
- The number of mesh Openings in the 1 m shall be counted & verified.

Figure (2)

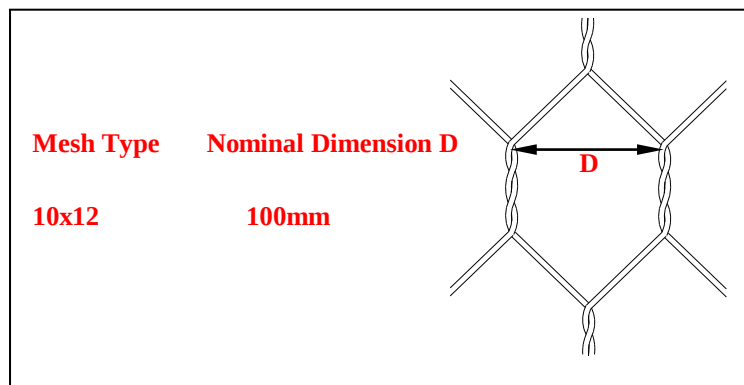

1.1.8 Tolerances

Wire: wire diameter tolerance and minimum Zn+ 10% Al alloy coating requirement shall be as per following table

Table (1)

Wire Diameter mm	2.2 mm	2.7 mm	3.4 mm
Wire Tolerance(+)mm	0.06	0.06	0.07

Minimum Qty of Zn+ 10% Al alloy (gm/m ²)	230	245	265
--	-----	-----	-----

1.19 Standard Sizes

Standard sizes (Length x Breadth x Height) of gabions are 4mx1mx1m, 3mx1mx1m, 2mx1mx1m, 1.5mx1mx1m, 4mx1mx0.5m, 3mx1mx.5m and 2mx1mx0.5m

1.1.10 Tolerance in gabion dimensions

+ 5% in all dimensions (length, breadth and height) shall be allowed as tolerance for Gabion units.

1.1.11 Fabrication

Gabions shall be manufactured with all components mechanically connected at the production facility. The front, base, back and lid of the gabions shall be woven into a single unit. The ends and diaphragm(s) shall be factory connected to the base. The lid may be a separate piece made of the same type mesh as the basket. All perimeter edges of the mesh forming the basket and top, or lid, shall be selvaged with wire having a larger diameter.

Gabion is divided into cells by means of diaphragms positioned at approximately 1m centers. The diaphragms shall be secured in position to the base so that no additional lacing is necessary at the jobsite.

Table (2) Typical Gabion sizes (10 X 12 -mesh type)

Length, m	Width, m	Height, m	Number of Diaphragms
4.0	1.0	1.0	3
3.0	1.0	1.0	2
2.0	1.0	1.0	1
1.5	1.0	1.0	0
4.0	1.0	0.5	3
3.0	1.0	0.5	2
2.0	1.0	0.5	1

1.1.12 Construction Requirements

Gabion filling and lacing and erection at site should be strictly as per the instruction of approved (by engineer) manufacturer's instructions as per the site specific requirements.

1.1.13 Assembly

Gabions are supplied folded flat and packed in bundles. Larger units may be supplied in rolls. The units are assembled individually by erecting the sides, ends, and diaphragms, ensuring that all panels are in the correct position, and the tops of all sides are satisfactorily aligned. The four corners shall be connected first, followed by the internal diaphragms to the outside walls.

The procedure for using lacing wire consists of cutting a sufficient length of wire, and first

looping and/or twisting the lacing wire to the wire mesh. Proceed to lace with alternating double and single loops through every mesh opening, pulling each loop tight and finally securing the end of the lacing wire to the wire mesh by looping and/or twisting. Refer figure 3.

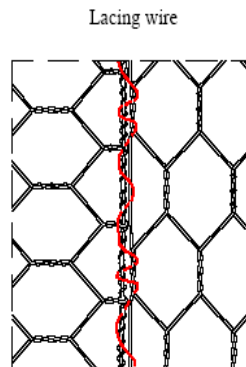


Figure (3)

1.1.14 Installation

After initial assembly, the gabions are carried to their final position and are securely joined together along the vertical and top edges of their contact surfaces using the same connecting procedure(s) described earlier. Whenever a structure requires more than one layer, the upper empty baskets shall also be connected to the top of the lower layer along the front and back edges of the contact surface using the same connecting procedure(s) described in Section 1.3.1.

1.1.15 Filling

Rock for the Gabion facia shall be hard, angular to round, durable and of such quality that they shall not disintegrate on exposure to water or weathering during the life of the structure. The rocks shall range between 150 mm to 250 mm for 10x12 type mesh. Each range of sizes may allow for a variation of 5% oversize rock by number of particles, or 5% undersize rock by number of particles, or both. The size of any oversize rock shall allow for the placement of minimum of three layers of rock must be achieved when filling the 1 m high units and a minimum of two layers for the 0.50 m high units. The rock used for filling the gabion facia shall have a minimum density of 24kN/m³ and Los Angeles abrasion value not more than 45.

The facing section shall be filled with rock in a careful way to get good horizontal and vertical alignment. During the filling operation skilled manual stone placement is required to minimize voids. The maximum permitted porosity of stone filling shall be 40%. For vertical or near vertical structures the exterior of the basket may be carefully hand placed to give a neat, flat, and compact appearance. Care shall be taken when placing fill material to ensure that the sheathing on the PVC coated baskets is not damaged. The facing stones should orient in such a way to get their flat surfaces facing to the front.

The cells shall be filled in stages so that local deformation may be avoided. At no time shall any cell be filled to a depth exceeding 0.30 m higher than the adjoining cell. It is also recommended to slightly overfill the baskets by 25mm to 50 mm to allow for settlement of the rock.

1.1.16 Internal Connecting Wires installation

Internal connecting wires shall connect the exposed face of a cell to the opposite side of the cell. An exposed face is any side of a gabion cell that will remain exposed or unsupported after the

structure is completed. Lacing wire or prefabricated internal connecting wires shall be used as internal connecting wires.

1. 1meter High Gabions

1meter high gabions shall be filled in three layers, 300 mm at a time. Connecting wires shall be installed after the placement of each layer, that is, at 300 mm high.

2. 0.5m High Gabions

0.5 meter high gabions do not require connecting wires unless the baskets are used to build vertical structures. These units shall be filled in two layers 250mm at a time. Connecting wires shall be installed after the placement of the first layer, which is at 250mm high.

3. Lid Closing

Once the gabion baskets are completely full, the lids will be pulled tight until the lid meets the perimeter edges of the basket. The lid must then be tightly laced and/or fastened along all edges, ends and tops of diaphragm(s) in the same manner as described in earlier sections.

4. Mesh cutting and folding

Where shown on the drawings or otherwise directed by the engineer, the gabions shall be cut, folded and fastened together to suit existing site conditions. The mesh must be cleanly cut and surplus mesh either folded back or overlapped so that it can be securely fastened together with lacing wire or fasteners in the manner described in earlier Section. Any reshaped gabions shall be assembled, installed, filled and closed as specified in the previous sections.

1.1.17 Method of Measurement

The payment quantities for excavation shall be determined by the outside limits of the gabion structure. Quantities will be determined from cross sections and the linear distance, and paid for under the appropriate bid items.

The quantity to be paid for “In place gabions” shall be the number of cubic meters of gabions. Project conditions and material availability will determine the actual size of gabions to be used.

Excavated material beyond the limits of the gabions shall be backfilled with gravel, crushed rock or other material approved by the engineer.

1.1.18 Testing and Acceptance criteria

The material should get approval from the client before the actual supply start. The manufacturer of the Gabion facing unit should provide “Manufacturers Test Certificate’ and Quality Conformity Certificate for the material with every lot/shipment. Tensile strength test, and Zn+ Al alloy coating test on basic wire shall be done on one sample per every 10,000 numbers of units supplied. The tests shall be conducted in an accredited lab with proper testing facility or alternatively the tests shall be conducted in Manufacturer’s facility witnessed by an expert authorized by the client.

PVC Coating Thickness: The thickness of the PVC coating shall be determined on a randomly chosen individual piece of wire removed from the coil at 3 places 1 metre apart.

Measure with a micrometer the diameter of the galvanized steel wire with PVC coating. Determine the thickness of the PVC coating by stripping the PVC coating from the wire and

measure the reduced diameter with a micrometer. The thickness of the coating is the difference between the diameter of the galvanized steel wire with PVC coating and the measured diameter of the galvanized steel wire divided by two. The thickness values should be as per clause 1.2.4. While removing the PVC coating by stripping, take care not to remove any of the metallic surfaces.

The punch strength test results shall be 17.8 kN in accordance with MoRTH section 2500 and test specified therein.

1.1.19 Selvedge strength test:

A tensile test on mesh sample shall be carried out in order to estimate selvedge strength test. The test shall be carried out as per procedure outlined below. The selvedge strength shall be minimum 25 kN/m.

- a. Take a DT mesh of approximately 1.0 m width.
- b. The height of the sample shall be such that after selvedging on both the sides (1m), there shall be at least two mesh repetitions between the two selvedged wires, so that effective height of the sample shall be more than 300 mm.
- c. Sample shall be loaded on the UTM in a direction parallel to twist, with the samples being gripped at the two selvedged wires & not mesh twist.
- d. The distance between the two selvedge wires shall be recorded as Initial gauge length.
- e. Distance between the two end gripping points (pins) along the width of the sample shall be recorded as the unit width under test. The width shall be at least 700 mm.
- f. The load shall be applied gradually to the sample and the test be continued till the break point.
- g. The peak load and the % elongation shall be recorded.
- h. The strength of the selvedge connection shall be (peak load/unit width under test) expressed in kN/m.

NB. If the sample slips at any of the gripping point during the test, such a test shall be discarded and a new sample shall be taken.

1.1.20 Measurement for Payments

SCHEDULE H is to be considered for the measurement of payments of Gabion Works including all the different associated activities as mentioned above.

1.1.21 Eligibility of Manufacturer

Manufacturer of woven steel wire double twist hexagonal mesh gabions shall have:

- In-house facility to test the tensile strength of the basic GI wire and mechanically woven double twisted mesh panels using computerized testing facilities
- In-house test facility for Zn+ 10%Al alloy coating.
- A valid ISO 9001:2008 accreditation for manufacturing unit from an internationally accredited organization for its Gabion manufacturing facilities.
- Manufacturing experience of mechanically woven Gabions of minimum 10 years in India as per International standards.
- Existence in India for more than 10 years from the date of this tender notice.

- Proven experience in supply and designing of retention works in India for at least 10 years.
- Experience of supplying minimum 29,000 cum of Gabions & 1,75,000 sqm of geotextile. Manufacturer shall have supplied the material to government department for construction of Gabion structure that is minimum 10 years old on date of tender notice and shall furnish performance certificate of material for the same.

The Manufacturer / Supplier should not have a history of poor performance such as abandoning the works, financial failures, blacklisting. If it is observed, Manufacturer / Supplier will be automatically disqualified.

1.2 Non-woven Geotextile for filtration and separation :

1.2.1 Material

The nonwoven needle punched or thermally bonded or or any equivalent geotextile shall be used. The geotextile shall be made of polyester or polypropylene manufactured through machine made process of needle punching techniques. The mean Values of Geotextile shall be as shown in Table 1.

Table 1

PROPERTIES:		MARV Values	Test Method
Mechanical:			
Tensile Strength		7kN/m	ASTM D 4595
Elongation	at	> 50 %	ASTM D 4595
maximum load			
Grab Tensile Strength		500 N	ASTM D 4632/IS 13162 Part 5
Grab Elongation		> 55 %	ASTM D 4632/ IS 13162 Part 5
Puncture (CBR)	Strength	1200 N	ASTM D 6241
Hydraulic:			
Apparent Opening Size, AOS90		0.4 mm	ASTM D 4751
Permittivity		0.02 sec ⁻¹	ASTM D 4491

1.2.2 Method of measurement

Quantity of filter geotextile shall be determined from cross sections and the linear distance, and paid for under the appropriate bid items.

1.2.3 Method of Testing

The supplier has to submit a Certificate of conformity for the parameters indicated in Table 1 for every lot/shipment.

1.2.4 Basis of Payment

Accepted filter geotextile shall be paid for at the unit price (per square meter area) for each pay item included in the contract.

SCHEDULE H is to be considered for the measurement of payments of Gabion Works including all the different associated activities as mentioned above.

1.3 Gabion Facia Unit

1.3.1 Material:

These units are fabricated soft flexible heavily galvanized and PVC coated double twisted steel woven wire mesh units (Figure 1). The facing section of the unit is formed by connecting the back panel and a diaphragm to the main unit. This creates rectangular shaped cells used for stone confinement.

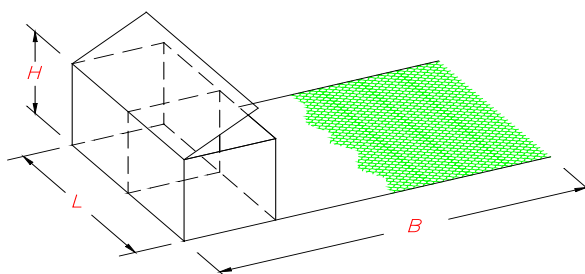


Figure (1)

1.3.2 Wire

All tests on the mesh, lacing wire and selvedge wire must be performed prior to manufacturing the mesh.

Tensile strength: The wire used for the manufacture of Mesh shall have a tensile strength minimum 350 N/mm^2 in accordance with IS 280. Wire tolerances (Table 1) shall be in accordance with IS 16014:2012 (Class T1).

Elongation: Elongation shall not be less than 10%, in accordance with IS 16014:2012 and MoRTH(Fifth Revision) Clause 3100. Test must be carried out on a sample at least 20 cm long.

1.3.3 Zn+ 10% Al alloy Coating

- Zn+ 10% Al alloy coating: Minimum quantities of Zn+ 10% Al alloy shall be as shown in table in clause 6.
- Adhesion of Zn+ 10% Al alloy coating: The adhesion of the Zn+ 10% Al alloy coating to the wire shall be such that, when the wire is wrapped ten turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers in accordance with IS 4826:1979.

1.3.4 PVC (Polyvinyl Chloride) Coating

1. PVC coating thickness: Nominal – 0.5 mm, Minimum – 0.38 mm;
2. Specific weight: 1.3 kg/dm³ – 1.35 kg/dm³ in accordance with ISO 1183.
3. Hardness: between 50 and 60 Shore D, according to ISO 868.
4. Tensile strength: Higher than 21 MPa, according to ISO 527
5. Elongation at break: not less than 200% in accordance with ISO 527.

1.3.5 Wire mesh (10x12 mesh type):

Mesh wire: Diameter – 2.70 mm Zn+10% Al alloy coated wire inside PVC coating and 3.70 mm when measured with external PVC coating;(ID/OD - 2.7mm/3.7mm)

Selvedge and reinforcement steel wire: Diameter – 3.40 mm Zn+10% Al alloy coated wire inside PVC coating and 4.40 mm when measured with external PVC coating;(ID/OD - 3.4mm/4.4mm).

Mesh opening: Nominal Dimension D = 100, as per Fig. 2


Tolerances in Mesh Opening size: -2% to + 2%

DT mesh shall have minimum 10 numbers of mesh openings per meter of mesh perpendicular to twist of mesh.

Procedure for verification of mesh opening

- a. Reinforced gabion facia shall be unfolded on the plain ground.
- b. Any shrink in the unfolded Gabion Mesh shall be removed, by stretching the Mesh panel.
- c. Marking on the ground shall be made from the Centre of the twist of one mesh and the second. Marking shall be done at 1 m distance.
- d. The number of mesh Openings in the 1 m shall be counted & verified.

Figure 2

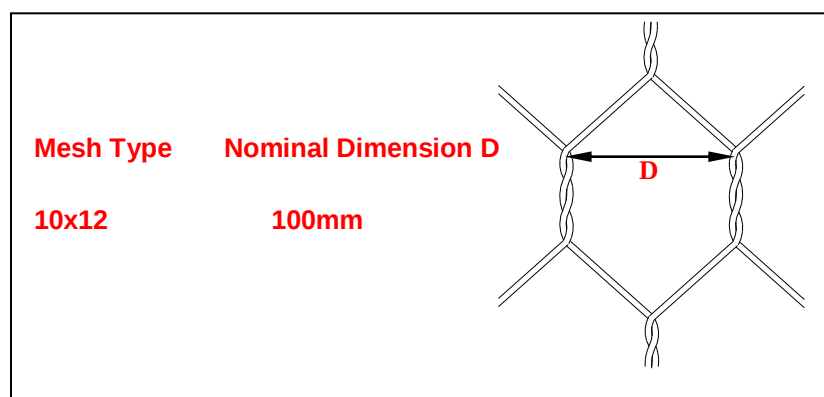

Tolerances

Wire: The wire shall meet diameter tolerance and minimum zinc coating requirement mentioned in the following table

Gabion facia and tail unit tolerance: $\pm 5\%$ on the length, width, and height.

Table (1)

Internal Wire Dia mm	2.2 mm	2.7 mm	3.4 mm
----------------------	--------	--------	--------

Wire Tolerance($\pm$) mm	0.06	0.06	0.07
Minimum Qty of Zn+ 10% Al alloy (gm/m ²)	230	245	265

1.3.6 Standard size

Gabion facia and tail with double twist hexagonal mesh units shall have the following dimensions

Length of reinforcement (B), m	Width (L), m	Height (H), m
3	2	1
4	2	1
5	2	1
6	2	1
3	2	0.5
4	2	0.5
5	2	0.5
6	2	0.5

1.3.7 Fabrication

Gabion facia and tail with double twist hexagonal mesh units shall be manufactured with all components mechanically connected at the production facility. The external face, reinforcing panel, and lid of the unit shall be woven into a single unit. The ends, back, and diaphragm shall be factory connected to the base. All perimeter edges of the mesh forming the basket shall be selvedge with wire having a larger diameter.

The facing element of a Gabion facia and tail with double twist hexagonal mesh unit is divided into two cells by means of a diaphragm positioned at approximately 1 m centres. The diaphragm shall be secured in position to the base so that no additional lacing is necessary at the job-site.

1.3.8 Structural Backfill in between reinforcement

The structural backfill shall be of good quality, free draining granular soil and plasticity index should be less than 9. The percentage of fines passing 75 micron sieve should not be greater than 15%. The maximum particle size in the structural fill shall not be more than 75 mm. The structural fill material should be basically free draining and it should be devoid of dirt and deleterious material.

1.3.9 Construction Requirements


1. Assembly

Gabion facia and tail with double twist hexagonal mesh units are supplied folded flat and packed in bundles. The facing section of the units are assembled individually by erecting the sides, back, ends, and diaphragm, ensuring that all panels are in the correct position, and the tops of all sides

are aligned. The four corners of the basket shall be connected first, followed by the internal diaphragm to the outside walls. All connections shall be made using lacing wire or ring fasteners.

The procedure for using lacing wire consists of cutting a sufficient length of wire, and first looping and/or twisting to secure the lacing wire to the wire mesh. Proceed to lace with alternating double and single loops through every mesh opening approximately every 150 mm pulling each loop tight and finally securing the end of the lacing wire to the wire mesh by looping and/or twisting. Refer Figure 3.

Figure (3)

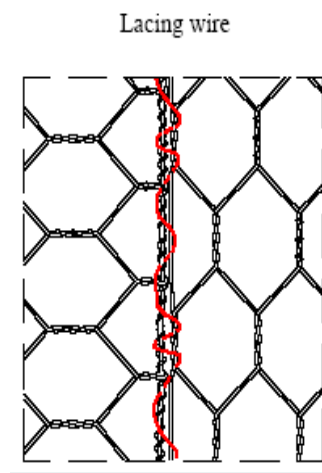

The use of ring fasteners shall be in accordance with the manufacturer's recommendations.

Following assembly of the facing section the reinforcing panel shall be unfolded to the required length and the shipping folds removed. Folds can be removed by placing the fold over a 50 mm x 100 mm board and walking along the sides.

2. Installation of units

Prior to installing the assembled units, the foundation on which these units are to be placed shall be cut or filled and graded to the lines and grades shown on the construction drawings. Surface irregularities, loose material, and vegetation shall be removed during the preparation of the foundation.

The units are carried to their final position and connected with the adjoining empty units along the vertical and top edges of their contact surfaces using the same connecting procedure(s) described in second paragraph Section 4.8.1. Whenever a structure requires more than one layer of units, the upper layer shall be connected to the top of the lower layer along the front and back edges of the contacts.

3. Internal Connecting Wires

Internal Connecting Wires shall connect the exposed face of a cell to the opposite side of the cell. An exposed face is any side of a gabion cell that will remain exposed or unsupported after the structure is completed. Lacing wire or prefabricated internal connecting wires shall be used as internal connecting wires.

4. Placement of the Structural Backfill

The soil reinforcement mesh panel should be unfolded; the shipping folds flattened out, and pulled tight to minimize further creepage. Prior to starting this operation, a filter geotextile shall be placed at backfill interface. The geotextile should have a 250 cm return at both top and bottom.

The granular backfill specified by the engineer shall be installed in lifts of approximately 30 cm, and dumped in the middle section of the soil reinforcement mesh panel. Compacting is to precede parallel to the wall, ensuring that the compacting machine does not come in contact with the mesh panel or within 1 m of the rear of the face section. The homogeneity of the backfill and the level of compaction required shall be verified.

5. Lid Closing

Once the baskets are completely full, the lids shall be pulled tight until the lid meets the perimeter edges of the basket. A tool like a lid closer can be used. The lid must then be tightly laced and/or fastened along all edges, ends, and tops of diaphragm(s) in the same manner as described in the above sections.

6. Mesh Cutting and Folding

Where shown on the drawings or otherwise directed by the engineer, the Gabion facia and tail with double twist hexagonal mesh units may be cut, folded and fastened together to suit existing site conditions. The mesh must be cleanly cut and surplus mesh either folded back or overlapped so that it can be securely fastened together with lacing wire or fasteners in the manner described earlier. Any reshaped Gabion facia and tail with double twist hexagonal mesh units shall be assembled, installed, filled and closed as specified in the previous sections.

1.3.10 Method of Measurement

The quantity to be paid for “gabion facia and mechanically woven, double twisted, hexagonal shaped Zn+PVC coated steel wire mesh tail as reinforcement” shall be the number of units supplied and installed in their final position. Project conditions and design will determine the actual size of units to be used.

The bid price shall include the in place cost of all materials, equipment, and labour, including gabion facia and integrated tail mechanically woven, double twisted, hexagonal shaped Zn+PVC coated steel wire mesh tail as reinforcement.

1.3.11 Testing

The material should get approval from the client before the actual supply start. The manufacturer of the Gabion facing unit should provide “Manufacturers Test Certificate’ for the material with every lot/shipment.

Tensile strength test and zinc coating test on basic wire shall be done on one sample per every 10,000 numbers of units supplied. The sample of wire for all the tests shall be taken from raw material before manufacturing.

PVC Coating Thickness: The thickness of the PVC coating shall be determined on a randomly chosen individual piece of wire removed from the coil at 3 places 1 metre apart.

Measure with a micrometer the diameter of the galvanized steel wire with PVC coating. Determine the thickness of the PVC coating by stripping the PVC coating from the wire and measure the reduced diameter with a micrometer. The thickness of the coating is the difference between the diameter of the galvanized steel wire with PVC coating and the measured diameter of the galvanized steel wire divided by two. The thickness values should be as per clause 4.

While removing the PVC coating by stripping, take care not to remove any of the metallic surface.

Selvedge strength test:

A tensile test on mesh sample shall be carried out in order to estimate selvedge strength test. The test shall be carried out as per procedure outlined below. The selvedge strength shall be minimum 25 kN/m.

- Take a DT mesh of approximately 1.0 m width.
- The height of the sample shall be such that after salvaging on both the sides (1m), there shall be at least two mesh repetitions between the two selvedged wires, so that effective height of the sample shall be more than 300 mm.
- Sample shall be loaded on the UTM in a direction parallel to twist, with the samples being gripped at the two selvedged wires & not mesh twist.
- The distance between the two selvedge wires shall be recorded as Initial gauge length.
- Distance between the two end gripping points (pins) along the width of the sample shall be recorded as the unit width under test. The width shall be at least 700 mm.
- The load shall be applied gradually to the sample and the test be continued till the break point.
- The peak load and the % elongation shall be recorded.
- The strength of the selvedge connection shall be (peak load/unit width under test) expressed in kN/m.

NB. If the sample slips at any of the gripping point during the test, such a test shall be discarded and a new sample shall be taken.

1.3.12 Eligibility of Manufacturer

The Manufacturer of Gabion facia with integrated tail mesh shall have:

- In-house facility in the manufacturer's plant in to test the tensile strength of the basic wire which forms mechanically woven double twisted mesh panels.
- In-house test facility in the manufacturer's plant for zinc +10% Alloy coating test.
- In-house facility in the manufacturer's plant to test selvedge strength and mesh panel strength.
- Proven experience in supplying and designing for structures with composite soil reinforcement systems, in which gabion is one of facia component for a minimum height of 25m, with supporting documentary evidence.
- The supplier shall produce performance certificate of Gabion facia with integrated tail of at least 10 year old structure from government department.
- The Manufacturer / Supplier shall be manufacturing / supplying the system for more than 10 years from the date of this tender notice.

- In-house design capability & same shall be ISO9001:2008 certified by an internationally accredited organization.
- Manufacturer of mesh should provide a performance bond for material for minimum 5 years to the client.
- Manufacturer should undertake for site supervision during the execution of RS wall work.
- The Manufacturer / Supplier should not have a history of poor performance such as abandoning the works, financial failures, blacklisting. If it is observed, Manufacturer / Supplier will be automatically disqualified.

1.3.13 Basis of Payment

Accepted gabion facia and integrated tail mechanically woven, double twisted, hexagonal shaped Zn+PVC coated steel wire mesh tail as reinforcement unit will be paid for at the unit price for each pay item included in the contract.

SCHEDULE H is to be considered for the measurement of payments of mattress including all the different associated activities as mentioned above.

1.4 High Strength Geogrid/Strap for Reinforcement

1.4.1Description:The primary soil reinforcement shall be high strength flexible geogrid/strap with a high quality coating like LDPE or equivalent. Latex or PVC coating or geotextile shall not be permitted. The selection of the geogrid/strap need to be strictly based on the long term design strength values for a design life of 120 years at 20°C. The primary soil reinforcement shall conform to the details given in table 1. The Ultimate tensile strength values indicated in table 1 are short term, which needs to be reduced to long term strength for design purpose by applying suitable partial material factors or reduction factors (RF) as explained in clause 2.2 . The selection of the geogrid/strap need to be strictly based on the long term design strength values for a design life of 120 years at 20°C.

Table – Long Term Design Strength of Geogrids/Strap

Geogrid/Strap Grade	1	2	3
Ultimate Tensile strength corresponding to 12% strain (kN/m)	100	200	300
Long Term Design Strength at 20°C Temperature for 120 year design life (minimum) (kN/m)	60	121	181
Roll Width (minimum) (m)	4.5	4.5	4.5

NOTE:

Tensile strength per metre should be based on tests performed as per ISO 10319 test procedure.

1.4.2 Long term design strength properties

The long term design strength shall be derived as per guidelines given in ISO TR 20432 for design life of 120 years and design temperature of 20°C considering following factors

$$T_{\text{allow}} = T_{\text{UTS}} / R_F$$

$$R_F = R_{\text{FCR}} \times R_{\text{FID}} \times R_{\text{FW}} \times R_{\text{FCH}} \times F_S$$

T_{allow} = Allowable tensile strength

T_{UTS} = Ultimate tensile strength

R_F = Reduction factor

R_{FCR} = Reduction factor for creep

R_{FID} = Reduction factor for the effect of installation damage

R_{FW} = Reduction factor for weathering

R_{FCH} = Reduction factor environmental degradation (chemical and biological) at the service temperature

F_S = Reduction factor related to the mass of information available and to the production quality.

Use of default reduction factors mentioned in codes like FHWA or MoRTH shall not be permitted. The adoption of reduction factors should be strictly based on reliable test data and performance data available with the manufacturer from accredited independent agency or the manufacturer should provide a valid third party accredited certification like BBA (British Board of Agreement) certifying the Reduction Factor (RF) value for their geogrid for design temperature of 20°C and design life of 120 years. Manufacturer should have creep test data from independent accredited laboratory for period over 10 years at design temperature of 20°C.

1.4.3 Installation of Primary soil reinforcement

1. Care should be taken in the handling, lifting and positioning of geogrid/strap rolls. Since the weight of the rolls is high, mechanical lifting arrangements are necessary. This should be done using a lifting beam.
2. To ease the laying, and proper performance of the geogrid/strap, the formation on which it is to be laid should be flat without ruts and sharp undulations.
3. The structural backfill shall be of good quality, free draining granular soil and plasticity index should be less than 9. The percentage of fines passing 75 micron sieve should not be greater than 15%. The maximum particle size in the structural fill shall not be more than 75 mm. The structural fill material should be basically free draining and it should be devoid of dirt and deleterious material.


4. The rolls should be placed near the facia and started to roll back perpendicular to the wall direction as shown in the construction drawings.
5. The roll should be unwound a small amount by pushing the roll in the direction of the tensile strength requirement. The base end of the geogrid/strap now exposed should be secured by weighting or pinning it to the formation. The roll should then be unwound carefully ensuring that no slack or undulations occur in the geogrid/strap as it is laid. If these do occur they should be corrected immediately before proceeding. When the roll is completely unwound the free end of the geogrid/strap should be hand tightened and secured by weighting or pinning.
6. The run of primary soil reinforcement should be reasonably straight and all elements should be flat and not twisted. No undulations in the geogrid/strap should be evident.
7. There shall not be any active connection between primary soil reinforcement and secondary soil reinforcement by means of joining. The stress transfer shall happen by the frictional interaction between the primary and secondary soil reinforcement as per MoRTH Cl. 3105.2 paragraph 2 and IRC:SP:102-2014 Cl. 3.4. For this, a minimum overlap length of 3m shall be provided between the primary and secondary soil reinforcement.. (Figure 1).
8. Minimum overlap of 10cm shall be provided between two adjacent rolls of the primary soil reinforcement geogrid/strap, as shown in the figure below. Joining of different rolls in tensile stress direction of the structure shall not be permitted.

1.4.4 Testing and acceptance criteria

The material should get approval from the client before the actual supply start. Contractor within 30 days of issue of work order shall intimate Engineer in charge about the brand of material he intend to procure along with technical literature, past experience and other details about the manufacturer and arrange a visit of consultant to factory for inspection and testing of the material. The visit expenses (traveling, lodging and boarding) will be borne by client whereas the testing expenses will be born by the Contractor.

Tensile strength test shall be done on one sample per every 20,000 sqm of geogrid/strap supplied. Manufacturer of the geogrid should provide “Manufacturers Test Certificate” for the tensile strength of geogrid/strap elements.

In case of failure of any test /or contractor desire to source material from more than one manufacturer, the cost of visit in respect of additional source or visit for retesting by client and consultant shall be borne by Contractor. The cost of Airfare to &fro, Lodging& Boarding, shall be borne by contractor. It is not advisable to use geogrids/strap of different characteristics and inherent material properties together and that should not be allowed

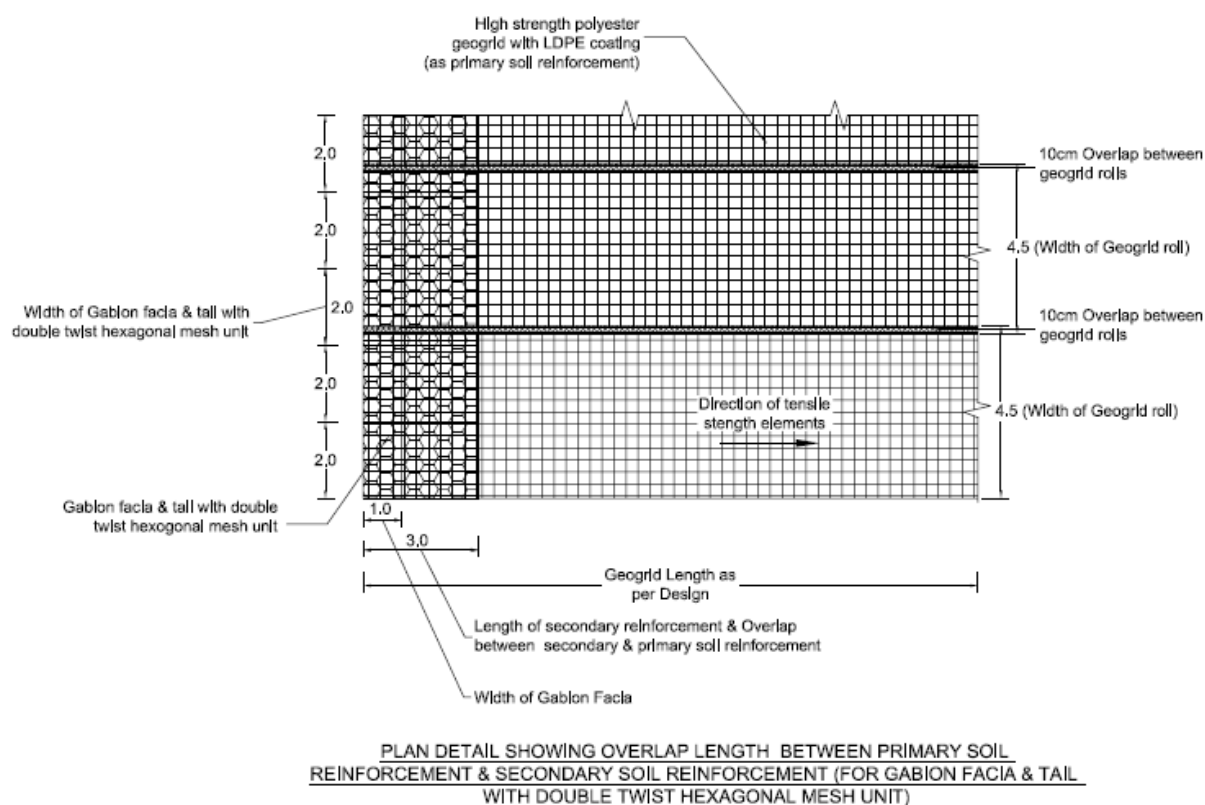

1.4.5 Eligibility criteria- Manufacturer

The Manufacturer should have experience in manufacturing, supplying and providing design and technical support for structures with composite soil reinforcement systems for a minimum height of 25m, with supporting documentary evidence for satisfactory performance of completed structures for minimum 5 years. The manufacturer shall have in-house technical support facilities to provide site specific design and required technical assistance at site. The manufacturing plant should be ISO 9001:2008 certified plant. The flow chart of quality procedures adopted in the plant should be submitted to the client for getting the source approval. The manufacturer of the geo grid should have in-house facility to test the tensile strength of the geo grid.

The manufacture should be able to supply the material continuously without any break or delay to the project. The average annual gross financial turnover of manufacture for the 3 years should be more than 70 crore audited and certified by a chartered accountant; starting from 2010. Manufacturer of geogrid should provide a performance bond for material for minimum 5 years to the client. Manufacturer should undertake for site supervision during the execution of geogrid work. A copy of contract specification shall also be provided to manufacturer to confirm that his material conforms to the specification for material and placement of primary reinforcement.

1.4.6 Method of Measurement

Quantities of primary soil geogrid reinforcement shall be determined from cross sections and the linear distance of the structure. The measurement shall be in square meters for different grades of

geogrid, measured in their final position in plan area. Site specific design and material availability will determine the actual grade of geogrid to be used.

1.4.7 Basis of Payment

Accepted primary soil geogrid reinforcements will be paid per square meter quantity of various grades for each pay item included in the contract.

SCHEDULE H is to be considered for the measurement of payments of Facia Units including all the different associated activities as mentioned above.

2. 3D Mechanically Woven Hexagonal Double Twisted Wire Mesh Reinforced Synthetic Erosion Control Mat:

2.1 Description

This work shall consist of supplying and installation of approved **3D Mechanically Woven Hexagonal Double Twisted Wire Mesh Reinforced Synthetic Erosion Control Mat** (3D Reinforced Synthetic Erosion Control Mat) or equivalent over the prepared slope which will protect the slope from erosion.

2.2 Eligibility Criteria

The Manufacturer / Supplier of 3D reinforced synthetic erosion control mat shall have

1. The Manufacturer / Supplier should have supplied 3D synthetic erosion control mat not less than 10,000 sq.m for a single project in India.
2. The Manufacturer / Supplier shall submit documentary proof of adoption of the proposed technology in India along with proposal.
3. The Manufacturer/Supplier shall have at least 10 years existence in India from the date of this tender.
4. The Manufacturer / supplier shall have a demonstrated capability of providing Technical support and design assistance for synthetic erosion control. In-house design capability & same shall be ISO9001:2008 certified by an internationally accredited organization.
5. The Manufacturer / supplier shall have in-house facility to test the tensile strength of the DT meshes used in 3D wire mesh reinforced mat using computerized testing facilities.
6. The Manufacturer / Supplier should not have a history of poor performance such as abandoning the works, financial failures, blacklisting. If it is observed, Manufacturer / Supplier will be automatically disqualified.

**** The Bidder shall submit the sample 3D Mechanically Woven Hexagonal Wire Mesh Reinforced Synthetic Erosion Control Mat with the bid during submission as per the technical specifications.

2.3 Material Properties

3D mechanically woven hexagonal wire mesh Reinforced Synthetic Erosion Control Mat is wire mesh reinforced three dimensional Synthetic Erosion control mat which consists of a mechanically woven double twist steel wire mesh inside a three-dimensional geo-mat composed of UV stabilized; non-degradable synthetic fibers.

A tension element, i.e., a reinforcing element like mechanically woven double twisted steel wire mesh is included along with the three dimensional polymeric mats to provide strength against erosive forces, supplied in roll form, is anchored to the surface, to be protected, using staple/pins. 3D reinforced synthetic mat shall conform to properties listed in Table 1.

2.4 Equipment

The equipment required to install the wire mesh reinforced synthetic erosion control mat shall vary as per the site condition. All necessary equipments shall be decided as per the project requirement and site condition. It shall be approved before the work begins by Engineer in Charge.

2.5 Construction Requirements

Prior to laying of 3D mechanically woven double twisted wire mesh Reinforced Synthetic Erosion Control Mat on the slope, the surface shall be properly prepared, cleaned and dressed to the specified lines and levels as shown on the drawings. Specified trench keys along the crest and at the bottom of slope area shall be provided to fix the 3D reinforced Synthetic Erosion control mat in the ground. In case the soil is not fertile, it shall be mixed with suitable amount of fertilizer or seeds.

Installation of 3D wire mesh reinforced synthetic erosion control mat shall be in accordance with the manufacturer's instructions. The supplier shall provide a method of statement detailing installation procedure.

Table 1 Properties of 3D wire mesh Reinforced Synthetic Erosion Control Mat

PROPERTIES	TEST METHOD	UNIT	VALUE
Polymer	POLYPROPYLENE		
Mass per unit area#	EN ISO 9864	g/m ²	600
Melting point	ISO 306	°C	150
Density#	ISO 1183	kg/m ³	900
UV Resistance	STABILIZED		
Reinforcement			
Type	Double twisted heavily galvanized woven Steel wire mesh		
Mesh Type		mm	8 x 10
Wire Dia		mm	2.7
Mechanical Properties			
Mechanical strength - length direction kN/m	EN ISO 10319	kN/m	47
NOMINAL PHYSICAL PROPERTIES			
Mass per unit area #	EN ISO 9864	g/m ²	2,000
Nominal Thickness #	EN ISO 9863-I	mm	12
Geomat Color#	Black		

Roll Length		m	25
Roll Width		m	1.95

Values indicated in the table are typical values

Not performance parameter

2.6 Method of Measurement

The 3D wire mesh reinforced synthetic erosion control mat shall be measured by the square meter or fraction thereof in place. Excavation, backfill, bedding and cover material are separate pay items.

2.7 Basis of Payment

Unless otherwise noted in the Plans, the accepted quantity of 3D wire mesh reinforced synthetic erosion control mat complete in place shall be paid for at the contract unit price per square meter.

2.8 Certificate of Compliance:

The Contractor shall provide the Engineer-In-Charge a Certificate of Compliance from the Manufacturer/supplier for every bill produced. The Certificate of Compliance shall be provided certifying that 3D reinforced synthetic erosion control mat conforms to all the Technical and special requirements. The Certificate of Compliance shall be supported by a certified copy of the Manufacturers test certificate.

2.4 Technical Specifications For Rock Bolts

The rock bolts shall be designed and arranged in order to stabilize the fractured or jointed rock mass to induce homogeneity in the behavior. The rock bolts shall have the required grip length in rock. The grout shall be made of OPC grade 53 with suitable admixtures. The rock bolts, nuts, bearing plates shall be epoxy coated.

Drilling shall be carried out by suitable equipment. Size of the hole shall be minimum 40 mm - 60 mm. Diameter of rock bolt shall be 25 mm. The rock bolt shall be made of Fe 415 grade steel as per IS: 1786. The top end of bolt shall be threaded for length of 200mm. For convenience of installation, appropriate arrangement (coupler) shall be made to connect two smaller lengths of rock bolts to achieve the required length.

Installation guideline

- 1) Hole of required diameter and depth shall be drilled at specified spacing in horizontal and vertical directions. Anymore / lesser length or spacing of bolting shall be carried out as per site condition and as directed by engineer-in-charge.
- 2) Drilled holes shall be filled with Cement slurry having water/cement ratio 0.5 with admixture. The grouting shall be commenced from the base of drill hole and subsequently raised.
- 3) The grout shall be placed under gravity in the drilled hole.

- 4) 25mm diameter steel rock bolts shall be lowered inside the hole.
- 5) The MS base plates of size 200mm x 200mm x 12 mm shall be placed at rock interface for tightening the nuts.
- 6) The front end of the grout hole shall be sealed cement mortar after insertion of rock bolt.

Following equipments deployed on site

- 1) Grout agitator
- 2) Compressor – 450 to 600CFM
- 3) Drilling equipment percussion type

Expansive plasticizing agent for cement, grouts and mortars shall be used, typical brand name DR. FIXIT PIDICRETE AM is a shrinkage compensating grout admixture for pressure grouting.

Basis of Payment

The measurement and payment of rock bolts shall be as per BoQ item included in the contract.

Special requirement

The agency must have experience in working in steep slopes including surface anchoring for a depth of atleast 3m. The agency should also have good experience in drilling and grouting works on steep slopes of more than 100m in height.

2.5: Specification for Rhomboidal Steel Wire Rope Net Panels for Rock Fall Protection

2.5.1 Scope:

This specification covers the use of rhomboidal steel wire rope net panels (Wire rope net panel) for surface rock fall protection including the scope of furnishing and installation as per the special provisions mentioned in the specifications, instructions from the manufacturer/supplier of the rock fall protection system and as directed by the Engineer-In-Charge.

2.5.2 General Requirements:

a) The wire rope net panel shall meet the minimum requirements of steel wire rope laid to form panel mainly mesh size, rhomboidal mesh opening type, knot, diameter of wrapping rope and edge rope, Zn Coating and Knot tear resistance as specified in this document.

b) System Technology:

The wire rope net panel shall be made up of high strength steel wire rope in a mesh / grid configuration secured with a steel wire 'knot'. This knot shall have two bindings, each one formed by winding a pair of 3.00mm diameter steel wires around the junction between all perpendicular steel cables. The two bindings shall tightly secure the cables where they

CROSS.

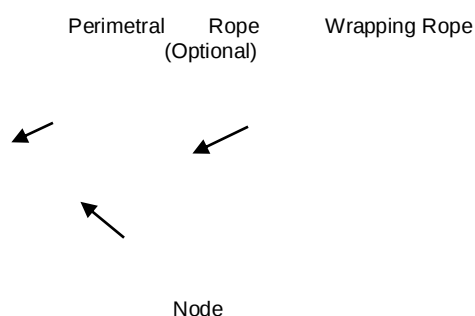


Fig 1a Wire Rope Net Panel

Fig 1b Junction Details with two bindings

Typical Wire Rope Net Panel

2.5.3 Material Specifications:

- Panels:** Wire rope net panels shall be made with only one steel cable, twisted to form rhomboid mesh. The intersection points shall be reinforced to resist to an eventual static or dynamic stress that can deform the panel. The reinforcement shall be made of double steel wire knots with a diameter of 3 mm, mechanically intersected during production phase on each side of the panel (double binding with double wire), as shown in the figure 1b.
- Binding System**
 The reinforcement shall be made of double steel wire knots with diameter of 3mm confirming to EN 10218, the wire shall be heavily galvanised for corrosion protection confirming to EN 10244 –Class A. The tensile strength of binding wire shall be in the range 380 – 550N/mm². This knot shall be capable of bearing a tear load of not less than 15 kN.
- Wrapping Rope:**
 A single steel cable of diameter 10mm shall be laid to form a grid of square mesh. The loose ends shall be secured using an aluminium sleeve fastening with resistance of not less than 90% of cable breaking load.




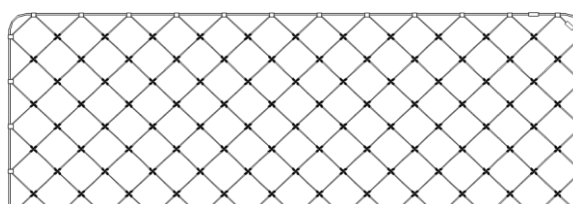


Table 1 Wrapping Rope

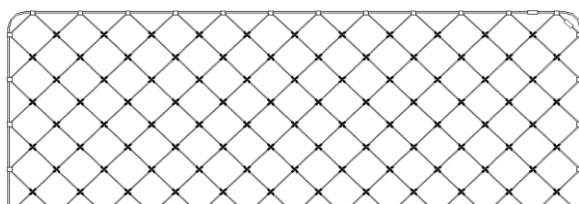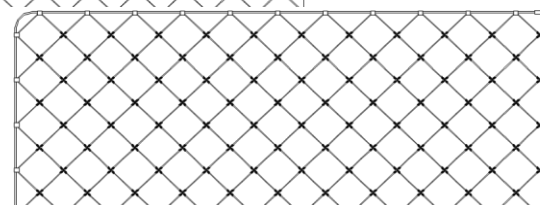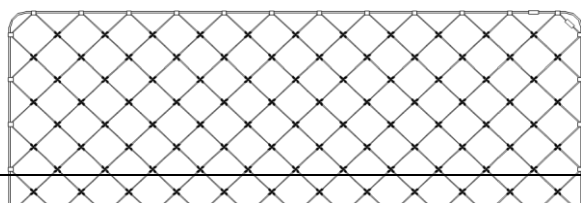

Diameter(mm)	10
Rope type (IS 2266/ISO 2408)	6X19M-CWR/IWR
Rope grade	1770N/mm ²
Zinc coating(IS 1835)	Class B

- **Edge / Perimetral Rope:**

The perimetral rope shall be used to secure the mesh panel.

Table 2 Perimetral rope

Diameter(mm)	10
Rope type (IS 2266/ISO 2408)	6X19M-CWR/IWR
Rope grade	1770N/mm ²
Zinc coating(IS 1835)	Class B

- **Lacing Rope:**

The lacing rope shall be of 8mm diameter with a metal centre having 6x19 + IWS configuration. It shall be used to connect the adjacent wire rope net Panels.

- **Junction sleeves at the end of the warping rope**

The junction sleeves shall be Aluminium sleeves type cylindrical in shape with a resistance equal to a minimum 90% of the rope breaking load.

- **Perimetral rope sleeves**

The perimetral rope sleeves shall be Aluminium sleeves with an open C shape.

- **Dimensions of Wire rope net panels**

Wire rope net panels shall be manufactured in a nominal mesh size indicated in Table 3. Width and length of the panel shall be chosen to suit the site specific requirements with tolerance of $\pm 5\%$.

Other roll sizes may be required as per site conditions subject to the Engineer's approval. For non-standard roll lengths there may be some variation outside the tolerance limit from the nominal size shown in the contract drawings.

Table 3 Standard Wire Rope Net Panel Dimension

Cable rope diameter	Perimetral Rope diameter	Mesh	Dimension	Knot Galvanization Class
(mm)	(mm)	(mm)	(m)	
10	10	400x400	6x3	A
10	10	300x300	6x3	A

2.5.4 Special requirements:

- The Manufacturer / Supplier should have production facility for manufacturing rhomboidal wire rope net panel in India. Manufacturing facility shall be certified for ISO 9001:2008 Quality Management System certification
- The wire rope net panel rock fall protection system shall have demonstrated satisfactory performance in similar applications and capacities in India or abroad. Valid documentary proof showing the supply of rhomboidal wire rope net panel to at least one project in India / abroad in the form of case study / Certificate from client shall be submitted.
- The Manufacturer / supplier shall have a demonstrated capability of providing technical support and design assistance for rock fall protection works.
- The Manufacturer / Supplier should have in-house testing facility to conduct the key testing on wire rope net panels.
- The Manufacturer / Supplier should have supplied Rhomboidal wire rope panels with double knot connection at junctions not less than 18000 sq.m for a single project in India.
- The Manufacturer / Supplier shall submit documentary proof of adoption of the proposed technology on at least one project in India along with proposal.
- The Manufacturer / Supplier should not have a history of poor performance such as abandoning the works, financial failures, blacklisting. If it is observed, Manufacturer / Supplier will be automatically disqualified

**** The Bidder shall submit the sample of Rhomboidal wire rope panels with double knot connection at junctions of minimum size 6m x 3m along with the bid during submission as per the technical specifications.

2.5.5 Installation:

The wire rope net panels are generally used in combination with rock bolting. The wire rope net panels shall carefully be draped over the slope and the rock bolts shall be installed, keeping the rock bolt under the mesh intersection. Wherever this is not possible, the rock bolt shall be enclosed within an additional steel cable provided as shown in the manufacturer's installation methodology. The wire rope net panels shall be connected to the top anchors with help of top

support rope of 16mm diameter and with anchors at base of the slope with help of bottom support rope of 12mm diameter. Care should be taken to tighten the rhomboidal wire rope net panel mesh around the rock bolt by pulling manually. Longitudinally adjacent panels shall be connected with a steel wire rope, which acts as a lacing cable. The wire rope net panels shall be ideally used in combination with mechanically woven double twist hexagonal wire mesh netting laid on the inner side of wire rope net panels.

After completion of wire rope net panel installation, a heavily zinc coated base plate of a 200x200x12mm size shall be tightened on the rock/soil anchor, taking care that the base plate maintains a tight contact with as much with the wire rope net panel as possible. Manufacturer's installation guideline shall be referred for details.

2.5.6 Testing and Acceptance criteria:

Testing shall be done on raw material as per testing plan indicated in Table 4. The material should get approved from the client before the actual start of supply. The manufacturer of the wire rope net panels shall provide Manufacturers Test Certificate for the material with every lot/shipment. The Manufacturers Test Certificate shall be provided for certifying that wire rope net panels rock fall protection system conforms to all the technical and special requirements.

Table 4 Testing Plan

Sr. No	Test	Reference	Frequency of Testing	Sample size	Remarks
	ROPE				
1	Tensile test on wire rope	IS 2266/ISO 2048	Once	Three	At wire rope manufacturer lab
2	Zinc mass of wire used in rope	IS 1835	Once	Three	At wire rope manufacturer lab
	KNOT WIRE				
3	Tensile strength & Elongation%	EN 10223	Once	Three	At wire rope net panel manufacturer lab
4	Mass of Zinc and adhesion	EN 10244	Once	Three	At wire rope net panel manufacturer lab
5	Physical dimension of Rhomboidal Wire Rope Net Panel	TDS & Visual checking			At wire rope net panel manufacturer lab
	KNOT				
6	Knot tear resistance	Manufacturer procedure	Once	Three	At wire rope net panel manufacturer lab
Note:	Testing of wire and rope shall be done on samples from raw material				

2.5.7 Method of Measurement:

Quantity of wire rope net panels shall be determined from cross sections and the linear distance,

and paid for under the appropriate bid items

2.5.8 Basis of Payment

The quantity of Rhomboidal wire rope panels to be paid for will be determined by the area in Sq.m installed and not the area covered by the netting, owing to wasting due to overlap as well as wastages due to non-conforming surfaces and non-rectangular shapes. The Contract price paid per Unit of Area in Square meter corresponding to supply quantity giving details of height and width of each rhomboidal wire rope panel complete in place of as per Standard specifications and the Special requirements and as directed by the Engineer- In- Charge.

4. Instrumentation and Monitoring

4.1 Introduction

Since the landslide rehabilitation / treatment work is to be done by rebuilding of reinforced valley slope of very high height which is very much unique in nature and also be the first time in INDIA, so it is very much necessary to monitor the behaviour of the reinforced valley slope structure during construction and also during post construction i.e. serviceability period of minimum 3 years.

4.2 Parameters to be Monitored

The parameters of the reinforced valley slope which are required to be monitored are as given below:

- Horizontal and vertical movement of slope face, surface and overall structure.
- Performance of any structure supported by the reinforced valley slope.
- Deterioration of facing and other soil nailing elements.
- Polymeric reinforcement and Nail force magnitude, maximum polymeric reinforcement and nail force and also change of force distribution with time.
- Drainage behavior of ground.

4.3 Composite Slope Performance Monitoring Plan

To monitor the above said different parameters of the valley slope behavior, the instruments namely “Slope Inclinometer”, “Strain Gauges”, “Earth Pressure / Load Cells”, Piezometers and Settlement Gauges are installed at various positions on the composite structure for such monitoring purpose.

4.4 Composite Slope Performance Monitoring Instruments

Composite slope performance monitoring instruments should be selected based on the parameters to be measured, the instrument’s reliability and simplicity, and the instrument’s compatibility with the readout devices specified for the project. A brief discussion of the various types of monitoring instruments typically employed for assessing soil nail wall performance is provided below.

Inclinometers

Inclinometers, preferably installed at Toe, midslope and Top of valley slope restoration, provide the most comprehensive data on wall deformations. Inclinometers are a well-established technology and are commercially available from several manufacturers.

Strain Gauges

Soil nails and polymeric reinforcement instrumented with strain gauges allow assessment of the soil nail load distribution as the excavation progresses and after the completion of the soil nail slope installation. Conventional strain gauges will measure loads carried by both the grout and nail and will thereby depend to some extent on the in-place deformational characteristics of the grout and the interaction between the grout and drillhole wall, both of which are difficult to evaluate.

This approach could eliminate data interpretation problems associated with grout/nail interaction. It has been suggested that some type of mechanical assembly could be installed at each gauge location to break the grout column and ensure that all load is transferred to the nail bar at this point. Because the grout has some tensile strength, it will carry a portion of the total load. Thus, while strain measurements in the grout and nail are readily achievable, conversion of these measurements into nail loads is difficult to achieve with accuracy.

Reflectors

Slope face deformation can be measured directly by optical surveying methods reflector prisms attached to selected nails allow for electronic deformation measurements of discreet points on the soil nail wall face. The survey system is typically capable of measuring horizontal and vertical displacements to accuracy of 3 mm (0.12 in.) or better.

Load Cells

Load cells installed at the Soil Nail Head and Polymeric Reinforcement Facing are used to provide reliable information on the actual loads that are developed at the facing.

Type of Instrumentation

<u>Type of Instrumentation</u>		
Sl.No.	Type of instrument	Numbers
1	Reflector	Type: bi-reflex target model Measuring Range (m): 12m to 140m (Maximum measuring distance is highly dependent on atmospheric conditions and EDM Model used) Manufacturing Accuracy: ± 0.1 mm Overall Accuracy: ± 1 mm (within the measuring section) The targets must be replaceable without loss of accuracy.
2	Strain Gauges	Standard Type with Accuracy
3	Inclinometer	Type: Vertical In-Place Inclinometer system (with sensors) Accuracy: $\pm 0.1\%$ fs (as tested under lab conditions) Range (degree): 15 0 Temperature Limit: -20 0C to 80 0C

4	Piezometer	Type: Vertical In-Place Inclinator system (with sensors) Accuracy: + 0.1% fs (as tested under lab conditions) Range (degree): 15 0 Temperature Limit: -20 0C to 80 0C
5	Load Cell	Type: Vibrating wire type earth pressure cell Accuracy: + 0.5% fs normal Range (MPa): 0.5MPa -10MPa Resolution: 10 kPa (with read-out unit) Operating temperature range: -10 to 70oC Compensated temperature range: 0 to 55 oC Over Range Limit: 150% of range (Maximum over pressure without damage)

Methodology

- Initially, one reading shall be captured per week for first three months. Once readings are observed to be stabilized measuring frequency can be shifted to two readings in a month. After that one reading per month can be captured.
- Monitoring of all the instruments will be done through automatic monitoring and recording devices. Before installing the instruments, Contractor should make sure that the calibration period of all the instruments to be installed is sufficient enough that the instruments will not require calibration for 05 years because once the instruments are embedded, calibration may not be possible.
- Monitoring of all the instruments will be for a period of 05 years which is almost equal to the construction period & the defect liability period of the contractor. However, it is advisable that the monitoring continues further at least 10 more years after DLP.

Analysis of the Data

- Facia Movement:** Reading from EDM shall be analyzed for determining the movement of facia in vertical, horizontal & lateral direction.
- Existing Slope movement:** On regular basis, the data from inclinometer inserted in the existing nailed portion shall be analyzed. Data shall be plotted with respect to height of structure.
- Reinforced Fill / Block movement:** Readings from inclinometer placed in reinforced zone shall be analyzed. Data shall be plotted with respect to height of structure & shall be compared with movement of retained portion. Soil Extensometer also gives the extension happened in reinforced fill/soil.
- Pore water pressure:** Reading from piezometer placed in existing slope fill & reinforced fill shall be recorded & plotted against time. Also, graphs for pore water pressure shall indicate the rainfall in a particular month or span.
- Earth Pressure:** Readings from earth pressure cells placed near facia shall be analyzed. These readings shall be superimposed on cross section of slope.

4.5 Deviations from the Specifications and Standards

The terms “Concessionaire”, “Independent Engineer” and “Concession Agreement” used in the Manual shall be deemed to be substituted by the terms “Contractor”, “Authority’s Engineer” and “Agreement” respectively.

Notwithstanding anything to the contrary contained in Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, the aforesaid Specifications and Standards shall be deemed to be amended to the extent set forth below.

The details of proposed rehabilitation / treatment/restoration as mentioned in schedule B shall supersede the provisions of Manual.

SCHEDULE - E
(See Clauses 2.1 and 14.2)

MAINTENANCE REQUIREMENTS

1 Maintenance Requirements

- 1.1 The Contractor shall, at all times maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- 1.2 The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfillment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Termination thereof.
- 1.3 All Materials, works and construction operations shall conform to the MORTH Specifications for Road and Bridge Works, and the relevant IRC publications. Where the specifications for a work are not given, Good Industry Practice shall be adopted.

2 Repair/Rectification of Defects and Deficiencies

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex - I of this Schedule-E within the time limit set forth therein.

3 Other Defects and Deficiencies

In respect of any Defect or deficiency not specified in Annex - I of this Schedule-E, the Authority's Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority's Engineer.

4 Extension of Time Limit

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Such additional time shall be determined by the Authority's Engineer and conveyed to the Contractor and the Authority with reasons thereof.

5 Emergency Repairs/Restoration

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage to property, the Contractor shall promptly take all reasonable measures for

eliminating or minimizing such danger.

6 Daily Inspection by the Contractor

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at any time during office hours.

7. Pre-monsoon Inspection / Post-monsoon Inspection

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

8. Repairs on Account of Natural Calamities

All damages occurring to the Project Highway on account of a Force Majeure Event or default or neglect of the Authority shall be undertaken by the Authority at its own cost. The Authority may instruct the Contractor to undertake the repairs at the rates agreed between the Parties.

Annex - I
(Schedule-E)

REPAIR/RECTIFICATION OF DEFECTS AND DEFICIENCIES

The Contractor shall repair and rectify the Defects and deficiencies specified in this Annex-I of Schedule-E within the time limit set forth in the table below.

Nature of Defect or deficiency		Time limit for repair/rectification
Hill side Treatment		
a)	Cleaning of Debris	3 days
b)	Catch drawing and catch pits	3 days
c)	PVC Pipes	7 days
d)	Damage to Hydroseeding	30 days
e)	Damage to HR-30/50 and Rhomboidal wire	15 days
f)	Damage to RR Breast wall	7 days
g)	Cracks/Damage to shortCrete surface	21 days
h)	Tightening of SDA plate	5 days
Valley side		
i)	Damage to Valley side work	10 days

The failure to address above measures for any of the defects/deficiency may attract reduction in payment as per Schedule M.

SCHEDULE - F
(See Clause 3.1.7(a))

APPLICABLE PERMITS

1 Applicable Permits

- 1.1 The Contractor shall obtain, as required under the Applicable Laws, the following Applicable Permits:
- (a) Permission of the State Government for extraction of boulders from quarry;
 - (b) Permission of Village Panchayats and Pollution Control Board for installation of crushers;
 - (c) Licence for use of explosives;
 - (d) Permission of the State Government for drawing water from river/reservoir;
 - (e) Licence from inspector of factories or other competent Authority for setting up batching plant;
 - (f) Clearance of Pollution Control Board for setting up batching plant;
 - (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphalt plant;
 - (h) Permission of Village Panchayats and State Government for borrow earth;
 - (i) Permission from the railway department from respective department, and
 - (j) Any other permits or clearances required under Applicable Laws.
- 1.2 Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority in accordance with the provisions of this Agreement.

SCHEDULE-G
(See Clauses 7.1.1, 7.5.3 and 19.2)

FORM OF BANK GUARANTEE

Annex-I
(See Clause 7.1.1)

[Performance Security/Additional Performance Security]

To

_____ [name of Authority]
_____ [address of Authority]

WHEREAS _____ [name and address of Contractor] (hereafter called the “Contractor”) has undertaken, in pursuance of Letter of Acceptance (LOA) No. ___Dated___ for construction of [name of the Project] (hereinafter called the “Contract”)

AND WHEREAS the Contract requires the Contractor to furnish an {Performance Security/ Additional Performance Security} for due and faithful performance of its obligations, under and in accordance with the Contract, during the {Construction Period/ Defects Liability Period and Maintenance Period} in a sum of Rs. cr. (Rupees crore) (the “**Guarantee Amount**”¹).

AND WHEREAS we, through our branch at (the “**Bank**”) have agreed to furnish this Bank Guarantee (hereinafter called the “**Guarantee**”) by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor’s obligations during the {Construction Period/ Defects Liability Period and Maintenance Period} under and in accordance with the Contract, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager of National Highways & Infrastructure Development Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Contract shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Contract and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

¹ Guarantee Amount for Performance Security and Additional Performance Security shall be calculated as per Contract.

3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.

5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Contract or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Contractor contained in the Contract or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Contract and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.

6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Contractor for the fulfillment, compliance and/or performance of all or any of the obligations of the Contractor under the Contract.

7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.

8. The Guarantee shall cease to be in force and effect on ****[§]. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.

9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.

10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorized to receive such notice and to effect payment thereof forthwith, and if sent

[§]Insert date atleast 2 (two) years from the date of issuance of this Guarantee (in accordance with Clause 2.21 of the RFP). The Contractors can submit the BG for periods of two years at one time and keep on renewing the same till the DLP is over if they have problems in getting the BG in one go for the entire DLP.

by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

12. This Guarantee is subject to the Uniform Rules for Demand Guarantees (URDG) 2010 Revision, ICC Publication No. 758, except that the supporting statement under Article 15(a) is hereby excluded.

13. This guarantee shall also be operatable at our.....Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

14. Intimation regarding issuance of this Bank Guarantee shall be sent to Authority's Bank through SFMS gateway as per the details below:

S.No.	Particulars	Details
1	Name of Beneficiary	National Highways & Infrastructure Development Corporation Limited
2	Beneficiary Bank Account No.	90621010002659
3	Beneficiary Bank Branch	IFSC SYNB0009062
4	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank) transport Bhawan, 1st Parliament Street, New Delhi-110001

Signed and sealed this day of, 20..... at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

Annex – II
(Schedule - G)
(See Clause 7.5.3)

**FORM FOR GUARANTEE FOR WITHDRAWAL OF RETENTION
MONEY**

To

_____ [name of Authority]
_____ [address of Authority]

WHEREAS:

- (A) _____ [name and address of contractor] (hereinafter called the “**Contractor**”) and _____, (hereinafter called the “**Authority**”) have entered into an agreement (hereinafter called the “**Agreement**”) for the Construction of [Name of the Project] through an engineering, procurement and construction (EPC) contract Engineering, Procurement and Construction (the “**EPC**”) basis, subject to and in accordance with the provisions of the Agreement.
- (B) In accordance with Clause 7.5.3 of the Agreement, the Contractor may withdraw the retention money (hereinafter called the “**Retention Money**”) after furnishing to the Authority a bank guarantee for an amount equal to the proposed withdrawal.
- (C) We,through our branch at (the “**Bank**”) have agreed to furnish this bank guarantee (hereinafter called the “**Guarantee**”) for the amount of Rs. - ----- cr. (Rs.-----crore) (the “**Guarantee Amount**”).

NOW, THEREFORE, the Bank hereby unconditionally and irrevocably guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways Authority of India], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final, and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.
3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the

- Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
 5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Retention Money and any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
 6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Retention Money.
 7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
 8. The Guarantee shall cease to be in force and effect 90 (ninety) days after the date of the Completion Certificate specified in Clause 12.4 of the Agreement.
 9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
 10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
 11. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the

Authority pursuant to the provisions of the Agreement.

12. This guarantee shall also be operatable at our.....Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

Signed and sealed this day of, 20..... at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex–III
(Schedule - G)
(See Clause 19.2)

FORM FOR GUARANTEE FOR ADVANCE PAYMENT

To

_____ [name of Authority]
_____ [address of Authority]

WHEREAS:

- (A) _____ [name and address of contractor] (hereinafter called the “**Contractor**”) and _____, (hereinafter called the “**Authority**”) have entered into an agreement (hereinafter called the “**Agreement**”) for the Construction of [Name of the Project] through an engineering, procurement and construction (EPC) contractEngineering, Procurement and Construction (the “**EPC**”) basis, subject to and in accordance with the provisions of the Agreement.
- (B) In accordance with Clause 19.2 of the Agreement, the Authority shall make to the Contractor an interest free advance payment (herein after called “**Advance Payment**”) equal to 10% (ten per cent) of the Contract Price; and that the Advance Payment shall be made in three installments subject to the Contractor furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of suchinstallment to remain effective till the complete and full repayment of the installment of the Advance Payment as security for compliance with its obligations in accordance with the Agreement.The amount of {first/second/third}installment of the Advance Payment is Rs. ----- cr. (Rupees ----- crore) andthe amount of this Guarantee is Rs. ----- cr. (Rupees ----- crore)(the“**Guarantee Amount**”)§.
- (C) We,through our branch at (the “**Bank**”) have agreed to furnish this bank guarantee (*hereinafter called the “**Guarantee**”*) for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum

§ The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment.

specified therein.

2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways Authority of India], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for the repayment of the instalment of the Advance Payment under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.
3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Advance Payment.
7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.

8. The Guarantee shall cease to be in force and effect on ****.* Unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.
9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
11. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
12. This Guarantee is subject to the Uniform Rules for Demand Guarantees (URDG) 2010 Revision, ICC Publication No. 758, except that the supporting statement under Article 15(a) is hereby excluded.
13. This guarantee shall also be operatable at our.....Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

Signed and sealed this day of, 20..... at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

* Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).

SCHEDULE - H
(See Clauses 10.1.4 and 19.3)

Contract Price Weightages

- 1.1 The Contract Price for this Agreement is Rs.....
- 1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

S. No.	Description of Work	% weightage as per CA	Item of work	% weightage stage wise
1	Nandprayag Landslide (01-L)	29.02	Loose scaling & removal of vegetation on hill side slopes	0.38
			Installation of Steel grid HR-30/50 /Steel wire grid mesh	22.64
			Providing & laying of galvenised steel rope net of square shape	20.43
			Supplying & installation of Self drilling Anchors (32 mm dia,	52.04
			Supply & Installation of the top and bottom support	0.11
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side With Supplying & Placing of Random rubble	3.55
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	0.03
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.82
2	Pursari Landslide (02-L)	8.15	Loose scaling & removal of vegetation on hill side slopes	0.95
			Supplying & installation of Steel grid HR-50 /Steel wire grid mesh.	16.38
			Supplying & installation of Self drilling Anchors (32 mm dia,	70.26
			Providing & Spraying 100 mm thick shotcrete	5.56
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And Supplying & Placing of Random	5.23

			rubble Masonry	
			Supplying & Installation including monitoring of Instruments	0.89
			Supplied & installation of PVC pipe 150 mm dia minimum	0.73
3	Chamoli Landslide (03-L)	11.93	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.81
			Supplying & installation of Steel grid HR-50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	42.41
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	36.00
			Providing & Spraying 100 mm thick shotcrete.	10.37
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	1.43
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And upplying & Placing of Randam rubble Masonry	7.25
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	1.13
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.60
4	Khetrapal Landslide (04-L)	4.37	Earthwork in excavation/Triming of ordinary rock/deposited at slope and bottom of slide by mechanical means	7.24

		Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(below 1st bench)	50.88
		Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Above 1st bench)	12.72
		Providing & Laying of PCC (M-15 Grade) for Drain lining at 1st bench on hill side.	4.21
		Anhoring CTA for strenthning of Geo synthetic mat .	2.06
		Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	13.09
		Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping arround pvc pipe As per MoRTH 700 Type-III geotextile.	1.24
		Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	3.09
		Supplied & installation of perforated pvc pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	5.47

5	Kaudia Landslide (05-L)	5.76	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.73
			Earthwork in excavation ordinary rock/deposited at slope and bottom of slide by mechanical means	0.49
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	13.52
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	62.17
			Providing & Spraying 100 mm thick shotcrete .	18.03
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And .Supplying & Placing of Random rubble Masonry.	4.44
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.62
6	Gadora-1 Sinking Zone (06-S)	12.74	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	1.07
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	9.70

			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	66.65
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh, mechanically edged & selvedged,mesh type 10*12.	18.22
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	1.44
			Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping arround PVC pipe As per MoRTH 700 Type-III geotextile.	0.33
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side wall.	1.88
			Supplying & Installation of monitoring instruments deferent type of monitoring as load cell,pizometere,strain/stress meter etc.as specified including all with future monitoring.	0.71
7	Gadora-2 Sinking Zone (07-S)	6.09	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	2.90
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Hill & Valley side)	52.69
			Supplying & placing of high strength geogrid of long term design strength 61.37 KN/m Paralink 100 grade as specified.	1.98

			Providing & backfilling behind gabion facia of terramesh wall with compection of each layer (.80 m) or as specified.	33.47
			Providing & Laying of PCC (M-15 Grade) for Surface drain & cascade on Hill side	4.68
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side wall.	4.28
8	Pipalkoti Sinking zone (08-S)	2.75	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	3.14
			Providing & Laying of PCC (M-15 Grade) for base padstal of RR Retaining wall of Hill side.	1.55
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	28.77
			Providing & Spraying 100 mm thick shotcrete with all material,manpowere,machinery etc.	9.60
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn) .	39.63
			Supplying & Placing of Randam rubble Masonry in Hill side.	14.59
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side RR wall.	1.74
			Supplying,Installed of Monitoring instruments as Pizometer,Inclinometer etc.	0.98
9	Pipalkoti Landslide -01 (09-L)	12.34	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.52

		Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	12.77
		Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	61.63
		Providing & Spraying 100 mm thick shotcrete.	5.35
		Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Hill & Valley side)	1.33
		Providing & laying of galvenised steel rope net of square shape having mesh opening 300 mm *300 mm with wire dia meter 9.0 mm dia with joint strength minimum of 30KN with nececery connection including spril locks as per detailed technical specifications & as directed by EIC.	16.90
		Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	0.73
		Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.77

10	Pipalkoti Landslide -02 (10-L)	1.29	Earthwork in excavation/Triming /Bench cutting of ordinary rock/boulders/deposited muck at slope and bottom of slide by mechanical means up to all lead & lift .	19.55
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12	27.04
			Supplying & installation of soil erosion control coir mat or pvc coted wire grid mesh with Geocomposite made of mechanically woven double twisted Hexagonal shaped.	10.58
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	19.05
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	8.52
			Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping arround pvc pipe .	0.73
			Construction of catch drain and chuite drain at top bench of slope toe.	3.82
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer ,peizometer, Strain meter etc as specified by design parameter.	7.00
			Supplied & installation of perforated PVC pipe 150 mm dia minimum for drainage system in gabion wall.	3.71
11	Pakhi Landslide (11-L)	2.67	Earthwork in excavation/Triming /Bench cutting of ordinary rock/boulders/deposited muck at slope and bottom of slide by mechanical means up to all lead & lift .	12.95
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged &	29.01

			servedged,mesh type 10*12	
			Supplying & installation of soil erosion control coir mat or pvc coted wire grid mesh.	7.30
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn)including grouting for full length of the drill hole .	30.66
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	5.88
			Supplying & Installation of polyester needle punched non woven geotextile	1.03
			Construction of catch drain and chuite drain at top bench of slope toe using RCC	4.92
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer ,peizometer, Strain meter etc	5.07
			Supplied & installation of perforated PVC pipe 150 mm dia minimum for drainage system in gabion wall.	3.18
12	Patalganga Landslide	2.89	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	2.09
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite	21.59
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn)	52.51
			Providing & Spraying 100 mm thick shotcrete	13.72
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side. AND Supplying & Placing of Randam rubble Masonry with all material ,manpower& machinery with 1:6 mortar in Hill side.	7.61

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplied & installation of perforated pvc pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	2.48
--	--	--	---	------

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

1.2.1 Procedure of payment

S. No.	Description of Work	% weightage as per CA	Item of work	% weightage stage wise	Payment Procedure
1	Nandprayag Landslide (01-L)	29.02	Loose scaling & removal of vegetation on hill side slopes	0.38	Payment shall be made on single stage on completion
			Installation of Steel grid HR-30/50 /Steel wire grid mesh	22.64	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered
			Providing & laying of galvenised steel rope net of square shape	20.43	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered.
			Supplying & installation of Self drilling Anchors (32 mm dia,	52.04	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Supply & Installation of the top and bottom support	0.11	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side With Supplying & Placing of Random rubble	3.55	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	0.03	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.82	Payment shall be made on single stage on completion
2	Pursari Landslide (02-L)	8.15	Loose scaling & removal of vegetation on hill side slopes	0.95	Payment shall be made on single stage on completion
			Supplying & installation of Steel grid HR-50 /Steel wire grid mesh.	16.38	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered
			Supplying & installation of Self drilling Anchors (32 mm dia,	70.26	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Spraying 100 mm thick shotcrete	5.56	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And Supplying & Placing of Random rubble Masonry	5.23	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & Installation including monitoring of Instruments	0.89	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of PVC pipe 150 mm dia minimum	0.73	Payment shall be made on single stage on completion
3	Chamoli Landslide (03-L)	11.93	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.81	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & installation of Steel grid HR-50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	42.41	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	36.00	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Providing & Spraying 100 mm thick shotcrete.	10.37	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	1.43	Payment shall be made on pro rata basis on completion of a stage measured in Square meter . Payment of each stage shall be made after minimum completion of 50% of total area.
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And applying & Placing of Random rubble Masonry	7.25	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	1.13	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.60	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

4	Khetrapal Landslide (04-L)	4.37	Earthwork in excavation/Triming of ordinary rock/deposited at slope and bottom of slide by mechanical means	7.24	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment shall be made after minimum completion of 50% length with 100% hight of total length
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(below 1st bench)	50.88	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.

			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Above 1st bench)	12.72	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Providing & Laying of PCC (M-15 Grade) for Drain lining at 1st bench on hill side.	4.21	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Anhoring CTA for strenthning of Geo synthetic mat .	2.06	Payment shall be made on pro rata basis on completion of a stage measured in number. Payment of each stage shall be made after minimum completion of 20% of total number
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	13.09	Payment shall be made on pro rata basis on completion of a stage measured in Square meter . Payment of each stage shall be made after minimum completion of 50% of total area.
			Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping arround pvc pipe As per MoRTH 700 Type-III geotextile.	1.24	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	3.09	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of perforated pvc pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	5.47	Payment shall be made on single stage on completion
5	Kaudia Landslide (05-L)	5.76	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.73	Payment shall be made on single stage on completion
			Earthwork in excavation ordinary rock/deposited at slope and bottom of slide by mechanical means	0.49	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment shall be made after minimum completion of 50% length with 100% hight of total length

			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	13.52	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	62.17	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Providing & Spraying 100 mm thick shotcrete .	18.03	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side And .Supplying & Placing of Random rubble Masonry.	4.44	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.62	Payment shall be made on single stage on completion
6	Gadora-1 Sinking Zone (06-S)	12.74	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	1.07	Payment shall be made on single stage on completion
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at	9.70	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).		
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	66.65	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh, mechanically edged & selvedged,mesh type 10*12.	18.22	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	1.44	Payment shall be made on pro rata basis on completion of a stage measured in Square meter . Payment of each stage shall be made after minimum completion of 50% of total area.
			Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping around PVC pipe As per MoRTH 700 Type-III geotextile.	0.33	Payment shall be made on single stage on completion
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side wall.	1.88	Payment shall be made on single stage on completion
			Supplying & Installation of monitoring instruments deferent type of monitoring as load cell,pizometere,strain/stress meter etc.as specified including all with future monitoring.	0.71	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

7	Gadora-2 Sinking Zone (07-S)	6.09	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	2.90	Payment shall be made on single stage on completion
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Hill & Valley side)	52.69	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & placing of high strength geogrid of long term design strength 61.37 KN/m Paralink 100 grade as specified.	1.98	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & backfilling behind gabion facia of terramesh wall with compection of each layer (.80 m) or as specified.	33.47	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Providing & Laying of PCC (M-15 Grade) for Surface drain & cascade on Hill side	4.68	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side wall.	4.28	Payment shall be made on single stage on completion
8	Pipalkoti Sinking zone (08-S)	2.75	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	3.14	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Laying of PCC (M-15 Grade) for base padstal of RR Retaining wall of Hill side.	1.55	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	28.77	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Spraying 100 mm thick shotcrete with all material,manpowere,machinery etc.	9.60	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn) .	39.63	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA
			Supplying & Placing of Random rubble Masonry in Hill side.	14.59	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side RR wall.	1.74	Payment shall be made on single stage on completion
			Supplying,Installed of Monitoring instruments as Pizometer,Inclinometer etc.	0.98	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.

9	Pipalkoti Landslide -01 (09-L)	12.34	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	0.52	Payment shall be made on single stage on completion
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite made of mechanically woven double twisted Hexagonal shaped steel wiremesh interacted during manufacturing with 8 mm steel wire rope in longitudinal direction at 0.5m spacing.(Mesh wire dia 2.7 mm,class A Zn-Al5% coated,type 8*10 with D=80 mm).	12.77	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered.
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	61.63	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Providing & Spraying 100 mm thick shotcrete.	5.35	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.

			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12 and wire dia 2.7/3.7 mm with Zinc+pvc coating As per IS16014:2012 & MoRTH Section 2500 in splash zones where alternate wetting and drying,there Zn+Al coating +pvc is preferred over Zn+PVC as per MoRTH 2500.(Hill & Valley side)	1.33	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Providing & laying of galvenised steel rope net of square shape having mesh opening 300 mm *300 mm with wire dia meter 9.0 mm dia with joint strength minimum of 30KN with nececery connection including spril locks as per detailed technical specifications & as directed by EIC.	16.90	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer Strain meter etc as specified by design parameter.	0.73	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of PVC pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	0.77	Payment shall be made on single stage on completion
10	Pipalkoti Landslide -02 (10-L)	1.29	Earthwork in excavation/Triming /Bench cutting of ordinary rock/boulders/deposited muck at slope and bottom of slide by mechanical means up to all lead & lift .	19.55	Payment shall be made on single stage on completion
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12	27.04	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & installation of soil erosion control coir mat or pvc coted wire grid mesh with Geocomposite made of mechanically woven double twisted Hexagonal shaped.	10.58	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered.
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn).	19.05	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	8.52	Payment shall be made on pro rata basis on completion of a stage measured in Square meter . Payment of each stage shall be made after minimum completion of 50% of total area.
			Supplying & Installation of polyester needle punched non woven geotextile as filter media behind gabion facia & for wrapping arround pvc pipe .	0.73	Payment shall be made on single stage on completion
			Construction of catch drain and chuite drain at top bench of slope toe.	3.82	Payment shall be made on single stage on completion

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer ,peizometer, Strain meter etc as specified by design parameter.	7.00	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.
			Supplied & installation of perforated PVC pipe 150 mm dia minimum for drainage system in gabion wall.	3.71	Payment shall be made on single stage on completion
11	Pakhi Landslide (11-L)	2.67	Earthwork in excavation/Triming /Bench cutting of ordinary rock/boulders/deposited muck at slope and bottom of slide by mechanical means up to all lead & lift .	12.95	Payment shall be made on single stage on completion
			Supplying & placing of Gabion unit is made with double twisted hexagonal shaped steel woven wire mesh,mechanically edged & selvedged,mesh type 10*12	29.01	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplying & installation of soil erosion control coir mat or pvc coted wire grid mesh.	7.30	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn)including grouting for full length of the drill hole .	30.66	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.
			Hydroseeding/Bio Engineering measures for erosion control over hill side slope.	5.88	Payment shall be made on pro rata basis on completion of a stage measured in Square meter . Payment of each stage shall be made after minimum completion of 50% of total area.
			Supplying & Installation of polyester needle punched non woven geotextile	1.03	Payment shall be made on single stage on completion
			Construction of catch drain and chuite drain at top bench of slope toe using RCC	4.92	Payment shall be made on single stage on completion
			Supplying & Installation including monitoring of Instruments Like Load cell/Inclinometer ,peizometer, Strain meter etc	5.07	75% Payment shall be released after successful installation of instrument. Remaining 25% shall be released in equal instalment after each quarter in next 4 years/DLP.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Supplied & installation of perforated PVC pipe 150 mm dia minimum for drainage system in gabion wall.	3.18	Payment shall be made on single stage on completion
12	Patalganga Landslide	2.89	Loose scaling & removal of vegetation on hill side slopes as required with all manpower,machinery,tool & plants etc.	2.09	Payment shall be made on single stage on completion
			Supplying & installation of Steel grid HR-30/50 /Steel wire grid mesh Geocomposite	21.59	Payment of each stage shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% of total area covered.
			Supplying & installation of Self drilling Anchors (32 mm dia, Yeild load >230 kn)	52.51	Payment shall be made on pro rata basis on completion of a stage measured in running meters. Payment of each stage shall be made after minimum completion of 20% of total length of SDA.

Rehabilitation /Treatment of Landslide & Sinking Zone Locations with Slope Protection works and Drainage improvement at Nandprayag to Patalganga (Km 416.930 to 455.930) of NH-07 in Chamoli District in the state of Uttarakhand through an Engineering Procurement and Construction (EPC) Contract.

			Providing & Spraying 100 mm thick shotcrete	13.72	Payment shall be made on pro rata basis on completion of a stage measured in cube mtr Payment of each stage shall be made after minimum completion of 20% of total quantity.
			Providing & Laying of PCC (M-15 Grade) for base of RR wall on Hill side. AND Supplying & Placing of Random rubble Masonry with all material ,manpower & machinery with 1:6 mortar in Hill side.	7.61	Payment shall be made on pro rata basis on completion of a stage measured in running meter length. Payment of each stage shall be made after minimum completion of 20% with specified height.
			Supplied & installation of perforated pvc pipe 150 mm dia minimum for drainage system in Hill side shotcrete area and wall.	2.48	Payment shall be made on single stage on completion

SCHEDULE -I
(See Clause 10.2.4)

DRAWINGS

1 Drawings

In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

2 Additional Drawings

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.

Annex-I
(Schedule-I)

LIST OF DRAWINGS

[A minimum list of the drawings of the various components / elements of the Project Highway and project facilities required to be submitted by the Concessionaire is given below:

- Drawing showing plan and sectional details of valley slope restoration scheme.
- Drawings showing details of soil nail/anchor/soil reinforcement along with its connection details.
- Drawings of drainage work showing drains, details of proposed new culverts and downstream protection works for all the culverts to be adopted for culverts.
- Drawings showing details of erosion protection scheme to be adopted for protection of rebuilt valley slope and below the toe of proposed restoration scheme

SCHEDULE - J
(See Clause 10.3.2)

PROJECT COMPLETION SCHEDULE

1. During Construction period, the Contractor shall comply with the requirements set forth in this Schedule-J for each of the Project Milestones and the **Scheduled Completion Date**. Within 15 (fifteen) days of the date of each Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

2 Project Milestone-I

- 2.1 Project Milestone-I shall occur on the date falling on the 150th (one hundred and fiftieth) day from the Appointed Date (the “**Project Milestone-I**”).
- 2.2 Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 30% (thirty per cent) of the Contract Price.

3 Project Milestone-II

- 3.1 Project Milestone-II shall occur on the date falling on the 240th (two hundred and fortieth) day from the Appointed Date (the “**Project Milestone-II**”).
- 3.2 Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 60% (sixty per cent) of the Contract Price.

4 Project Milestone-III

- 4.1 Project Milestone-III shall occur on the date falling on the [365th (three hundred sixty fifth)] day from the Appointed Date (the “**Project Milestone-III**”).
- 4.2 Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 100% (hundred per cent) of the Contract Price.

5 Scheduled Completion Date

- 5.1 The Scheduled Completion Date shall occur on the [365th (three hundred sixty fifth)]day from the Appointed Date.
- 5.2 On or before the Scheduled Completion Date, the Contractor shall have completed construction in accordance with this Agreement.

6 Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

SCHEDULE -K

(See Clause 12.1.2)

TESTS ON COMPLETION

1 Schedule for Tests

- 1.1 The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10 (ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- 1.2 The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule-K.

2 Tests

- 2.1 Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include [to be **decided with Authority's Engineer at the time of physical tests as per relevant IRC/ Code Manual**].
- 2.2 Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometre.
- 2.3 Tests on Nails/anchors: Load tests should be carried out as per relevant FHWA/BS codes for checking the strength of nail/anchor after installation.
- 2.4 Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with the technical specifications and Good Industry Practice, for determining the compliance of the Project Highway with Specifications and Standards.
- 2.5 Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- 2.6 Safety Audit: The Authority's Engineer shall carry out, or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

3 Agency for conducting Tests

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

4 Completion Certificate

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

SCHEDULE-L
(See Clause 12.2 and 12.4)

PROVISIONAL CERTIFICATE

- 1 I, (Name of the Authority's Engineer), acting as the Authority's Engineer, under and in accordance with the Agreement dated (the "**Agreement**"), for construction of the [****section (km ** to km **) of National-Highway No. 55] (the "**Project Highway**") on Engineering, Procurement and Construction (EPC) basis through (Name of Contractor), hereby certify that the Tests in accordance with Article 12 of the Agreement have been undertaken to determine compliance of the Project Highway with the provisions of the Agreement.
- 2 Works that are incomplete on account of Time Extension have been specified in the Punch List appended hereto, and the Contractor has agreed and accepted that it shall complete all such works in the time and manner set forth in the Agreement. In addition, certain minor works are incomplete and these are not likely to cause material inconvenience to the Users of the Project Highway or affect their safety. The Contractor has agreed and accepted that as a condition of this Provisional Certificate, it shall complete such minor works within 30 (thirty) days hereof. These minor works have also been specified in the aforesaid Punch List.
- 3 In view of the foregoing, I am satisfied that the Project Highway from km ** to km ** can be safely and reliably placed in service of the Users thereof, and in terms of the Agreement, the Project Highway is hereby provisionally declared fit for entry into operation on this the day of 20.....

ACCEPTED, SIGNED, SEALED

AND DELIVERED

For and on behalf of

CONTRACTOR by:

(Signature)

SIGNED, SEALED AND

DELIVERED

For and on behalf of

AUTHORITY's ENGINEER by:

(Signature)

COMPLETION CERTIFICATE

- 1 I, (Name of the Authority's Engineer), acting as the Authority's Engineer, under and in accordance with the Agreement dated (the "**Agreement**"), for [construction of the ****section (km ** to km **) of National Highway No. 55] (the "**Project Highway**") on Engineering, Procurement and Construction (EPC) basis through (Name of Contractor), hereby certify that the Tests in accordance with Article 12 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement, and I am satisfied that the Project Highway can be safely and reliably placed in service of the Users thereof.
- 2 It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highway have been completed, and the Project Highway is hereby declared fit for entry into operation on this the day of 20.....

SIGNED, SEALED AND DELIVERED

For and on behalf of

the Authority's Engineer by:

(Signature)

(Name)

(Designation)

(Address)

SCHEDULE -M
(See Clauses 14.6, 15.2 and 19.7)

PAYMENT REDUCTION FOR NON-COMPLIANCE

1. Payment Reduction for Non-compliance with the Maintenance Requirements

- 1.1 Monthly lump sum payments for maintenance shall be reduced in the case of non-compliance with the Maintenance Requirements set forth in Schedule-E.
- 1.2 Any deduction made on account of non-compliance with the Maintenance Requirements shall not be paid even after compliance subsequently. The deductions shall continue to be made every month until compliance is done.
- 1.3 The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph 2.

2. Percentage Reductions in Lump Sum Payments

- 2.1 The following percentages shall govern the payment reduction:

S. No.	Item/Defect/Deficiency	Percentage
Hill side treatment		10%
a)	Cleaning of Debris	10%
b)	Catch drawing and catch pits	15%
c)	PVC Pipes	10%
d)	Damage to Hydroseeding	20%
e)	Damage to HR-30/50 and Rhomboidal wire	15%
f)	Damage to RR Breast wall	10%
g)	Cracks/Damage to shortCrete surface	
h)	Tightening of SDA plate	5%
Valley side		
i)	Damage to Valley side work	10%

- 2.2 The amount to be deducted from monthly lump-sum payment for non compliance of particular item shall be calculated as under:

$$R = P / 100 \times M \times L1 / L$$

Where P = Percentage of particular item/Defect/deficiency for deduction

M = Monthly lump-sum payment in accordance with the Bid

L1 = Non-complying length

L = Total length of the road,

R = Reduction (the amount to be deducted for non compliance for a particular item/Defect/deficiency

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or non compliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

SCHEDULE - N
(See Clause 18.1.1)

SELECTION OF AUTHORITY’S ENGINEER

1 Selection of Authority’s Engineer

- 1.1 The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority’s Engineer.
- 1.2 In the event of termination of the Technical Consultants appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

2 Terms of Reference

The Terms of Reference for the Authority’s Engineer (the “**TOR**”) shall substantially conform with Annex 1 to this Schedule N.

3 Appointment of Government Entity as Authority’s Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority’s Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority’s Engineer.

Annex – I
(Schedule - N)

TERMS OF REFERENCE FOR AUTHORITY’S ENGINEER

1 Scope

- 1.1 These Terms of Reference (the “**TOR**”) for the Authority’s Engineer are being specified pursuant to the EPC Agreement dated (the “**Agreement**”), which has been entered into between the [name and address of the Authority] (the “**Authority**”) and (the “**Contractor**”) for the Construction of [Name of the Project] through an engineering, procurement and construction (EPC) contractEngineering, Procurement and Construction (the “**EPC**”) basis, and a copy of which is annexed hereto and marked as Annex-A to form part of this TOR.
- 1.2 The TOR shall apply to construction and maintenance of the Project Highway.

2 Definitions and Interpretation

- 2.1 The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- 2.2 References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.
- 2.3 The rules of interpretation stated in Clauses 1.2, 1.3 and 1.4 of the Agreement shall apply, *mutatis mutandis*, to this TOR.

3. General

- 3.1 The Authority’sEngineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.
- 3.2 The Authority’s Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority before determining:
- (a) any Time Extension;
 - (b) any additional cost to be paid by the Authority to the Contractor;
 - (c) the Termination Payment; or
 - (d) any other matter which is not specified in (a), (b) or (c) above and which creates an obligation or liability on either Party for a sum exceeding Rs. 5,000,000 (Rs. fifty lakh).
- 3.3 The Authority’s Engineer shall submit regular periodic reports, at least once every month,

to the Authority in respect of its duties and functions under this Agreement. Such reports shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.

- 3.4 The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
- 3.5 The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
- 3.6 In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

4 Construction Period

- 4.1 During the Construction Period, the Authority's Engineer shall review the Drawings furnished by the Contractor along with supporting data, including the geo-technical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1.6. The Authority's Engineer shall complete such review and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- 4.2 The Authority's Engineer shall review any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.
- 4.3 The Authority's Engineer shall review the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty-one) days stating the modifications, if any, required thereto.
- 4.4 The Authority's Engineer shall complete the review of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.
- 4.5 The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- 4.6 The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.

- 4.7 The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.
- 4.8 The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- 4.9 For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4.9, the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance.
- 4.10 The Authority's Engineer shall test check at least 20 (twenty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- 4.11 The timing of tests referred to in Paragraph 4.9, and the criteria for acceptance/ rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.
- 4.12 In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.
- 4.13 The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- 4.14 In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.
- 4.15 The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.4.

- 4.16 Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- 4.17 In the event that the Contractor carries out any remedial measures to secure the safety of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.
- 4.18 The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate or Provisional Certificate, as the case may be. For carrying out its functions under this Paragraph 4.18 and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

5. Maintenance Period

- 5.1 The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- 5.2 The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.
- 5.3 The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in this behalf.
- 5.4 In respect of any defect or deficiency referred to in Paragraph 3 of Schedule-E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.
- 5.5 The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause 14.5.

6 Determination of Costs and Time

- 6.1 The Authority's Engineer shall determine the costs, and/or their reasonableness, that are

required to be determined by it under the Agreement.

- 6.2 The Authority's Engineer shall determine the period of Time Extension that is required to be determined by it under the Agreement.
- 6.3 The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause 18.5.

7. Payments

- 7.1 The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2.4 (d).
- 7.2 Authority's Engineer shall -
- (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
 - (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable to the Contractor, after adjustments in accordance with the provisions of Clause 19.10.
- 7.3 The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.
- 7.4 The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

8. Other Duties and Functions

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

9 Miscellaneous

- 9.1 A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authority forthwith.
- 9.2 The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.
- 9.3 Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall

obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an as-built survey illustrating the layout of the Project Highway and setback lines, if any, of the buildings and structures forming part of Project Facilities; and shall hand them over to the Authority against receipt thereof.

- 9.4 The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- 9.5 The Authority's Engineer shall inform the Authority and the Contractor of any event of Contractor's Default within one week of its occurrence.

SCHEDULE -O
(See Clauses 19.4.1, 19.6.1, and 19.8.1)

FORMS OF PAYMENT STATEMENTS

1. Stage Payment Statement for Works

The Stage Payment Statement for Works shall state:

- (a) the estimated amount for the Works executed in accordance with Clause 19.3.1 subsequent to the last claim;
- (b) amounts reflecting adjustments in price for the aforesaid claim;
- (c) the estimated amount of each Change of Scope Order executed subsequent to the last claim;
- (d) amounts reflecting adjustment in price, if any, for (c) above in accordance with the provisions of Clause 13.2.3 (a);
- (e) total of (a), (b), (c) and (d) above;
- (f) Deductions:
 - (i) Any amount to be deducted in accordance with the provisions of the Agreement except taxes;
 - (ii) Any amount towards deduction of taxes; and
 - (i) Total of (i) and (ii) above.
- (g) Net claim: (e) – (f) (iii);
- (h) The amounts received by the Contractor upto the last claim:
 - (i) For the Works executed (excluding Change of Scope orders);
 - (ii) For Change of Scope Orders, and
 - (iii) Taxes deducted

2. Monthly Maintenance Payment Statement

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the Agreement;
- (b) the deductions for maintenance work not done;
- (c) net payment for maintenance due, (a) minus (b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction of taxes

3. Contractor's Claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

SCHEDULE -P
(See Clause 20.1)

INSURANCE

1. Insurance during Construction Period

- 1.1 The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire and terrorism:
- (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
 - (b) insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- 1.2 The insurance under paragraph 1.1 (a) and (b) above shall cover the Authority and the Contractor against all loss or damage from any cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

2. Insurance for Contractor's Defects Liability

The Contractor shall effect and maintain insurance cover for the Works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and which arises from a cause occurring prior to the issue of the Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

3. Insurance against Injury to Persons and Damage to Property

- 3.1 The Contractor shall insure against its liability for any loss, damage, death or bodily injury, or damage to any property (except things insured under Paragraphs 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number of occurrences.

The insurance cover shall be not less than: Rs. [*****]

- 3.2 The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:
- (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works; and
 - (b) damage which is an unavoidable result of the Contractor's obligations to execute the Works.

4. Insurance to be in Joint Names

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

End of the Document