

REGIONAL OFFICE – GUWAHATI

National Highways & Infrastructure Development Corp.Ltd.
(Ministry of Road Transport & Highways, Government of India)
2ndFloor, Agnishanti Business Park, Opp. AGP Office, GNB Road,
Ambari, Guwahati, PIN -781001, Tel : +91-361-2730546,
Email:edpnhidclghy1@gmail.comoredpghy@nhidcl.com



A GOVT. OF INDIA ENTERPRISE

RO/Sil/Sil-Jiri/OTI/24-25/2/ 16629

Date: 27.12.2024

CORRIGENDUM-I


Name of the work: One Time Improvement at selected locations between Km 9.400 (Kashipur) to km 31.260 (Lakhipur) of Silchar-Jiribam Section NH 37 (New) in the state of Assam in FY-24-25.

Tender ID: 2024_NHIDC_841388_1


Sl.No.	Description	Existing Item Mentioned	Item shall be read as
1	BOQ SI no.1.11	Bituminous Concrete (30mm) (Providing and laying bituminous concrete with 100-120 TPH batch type hot mix plant producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder @ 5.4 to 5.6 % of mix and filler transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the reqd. grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MoR&TH cl. no.509. complete in all respect. '(b) With rock dust as filler (refer table 500-9 of MoRT&H specification) '(III) with 30/40 or VG-40 grade Bitumen (msa>30) for Grading-II (13 mm nominal size)	Bituminous Concrete (40mm) (Providing and laying bituminous concrete with 100-120 TPH batch type hot mix plant producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder @ 5.4 to 5.6 % of mix and filler transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the reqd. grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MoR&TH cl. no.509. complete in all respect. '(b) With rock dust as filler (refer table 500-9 of MoRT&H specification) '(III) with 30/40 or VG-40 grade Bitumen (msa>30) for Grading-II (13 mm nominal size)
2	Clause 32.4.3 of the Section V of Conditions of Contract	The Contractor shall carry out all required field test of construction material as per clause 900 of MoRT&H specification and prevailing guidelines of Road and Building Department GoG. The minimum 10% of total required material testing shall be carried out in Government Testing Laboratory (i.e. GERI) at EPC Contractor's cost. In addition to the minimum 10% of total required material testing shall be carried out in Government approved NABL accredited Testing Laboratory at EPC Contractor's cost.	The Contractor shall carry out all required field test of construction material as per clause 900 of MoRT&H specification. Minimum 10% of total required material testing shall be carried out in Government Testing Laboratory (i.e. GERI) at Contractor's cost. In addition to this minimum 10% of total required material testing shall be carried out in Government approved NABL accredited Testing Laboratory at Contractor's cost.

2. Additional Drawings also uploaded with this Corrigendum-I.

(Binayak Kumar)
General Manager (P)

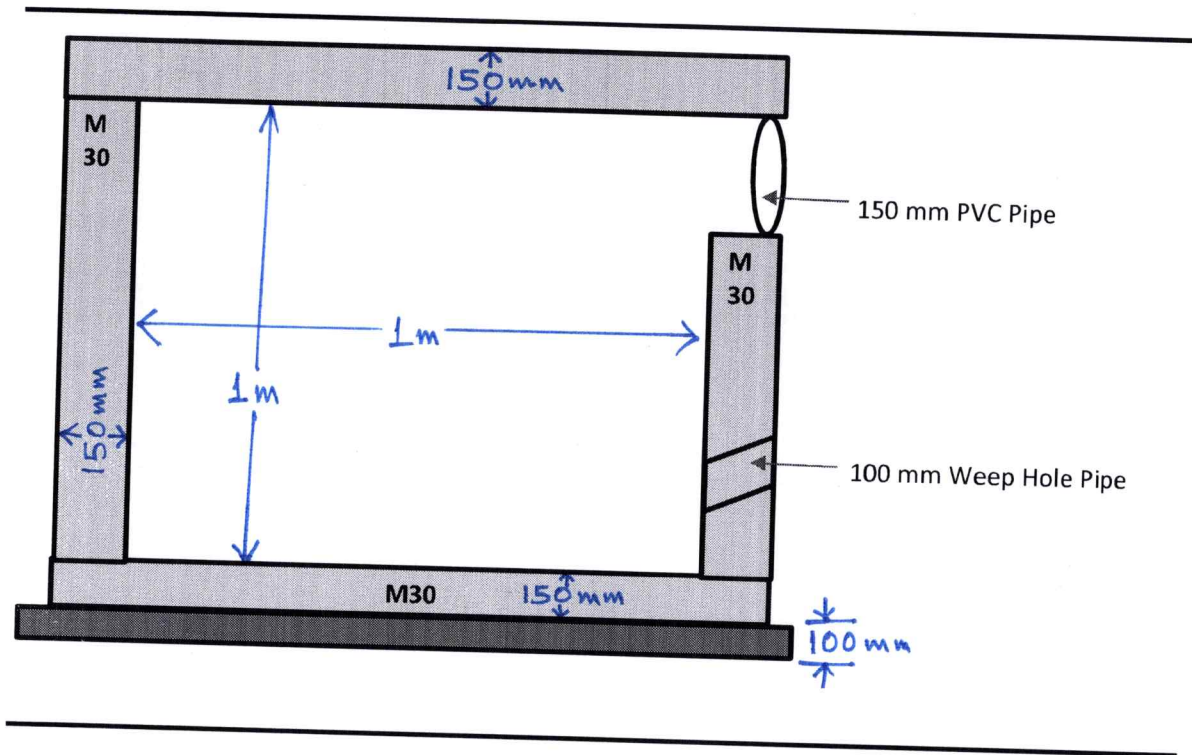


Dy. General Manager (T/P)
NHIDCL, PMU-Silchar
Cachar, Assam

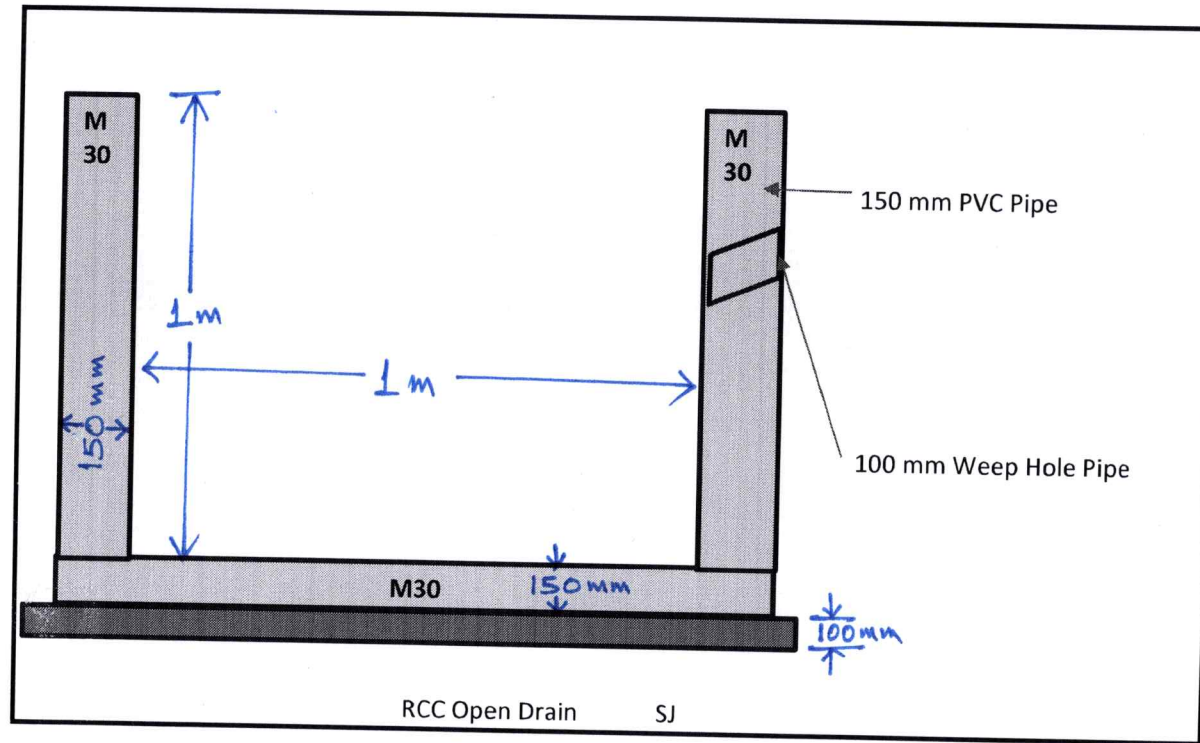


Dy. General Manager (T/P)
NHIDCL, PMU-Silchar
Cachar, Assam