




NATIONAL HIGHWAYS & INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

(Ministry of Road Transport & Highways)

Consultancy Against Supplementary Agreement dated 05.12.2019 - To execute the work of preparation of DPR as 'Additional work' for Package-H, HI, IV-C and V which forms part of the original Contract Agreement dated 30.09.2014 for Preparation of Feasibility Report cum Preliminary Design for alternative Highway to Gangtok in Sikkim via Bagrakot- Chuikhim -Nimbong- Kafer-BakhimAlgarah-Rhenok in the State of West Bengal and from Rhenok-Rorathang-Pakyong along with spur from Aritar-Rolep-Menla in the State of Sikkim-

Technical Schedule A to R
PKG - IIC Section of Rolep bridge to Chochenpheri from Km 37.600 to Km 52.000

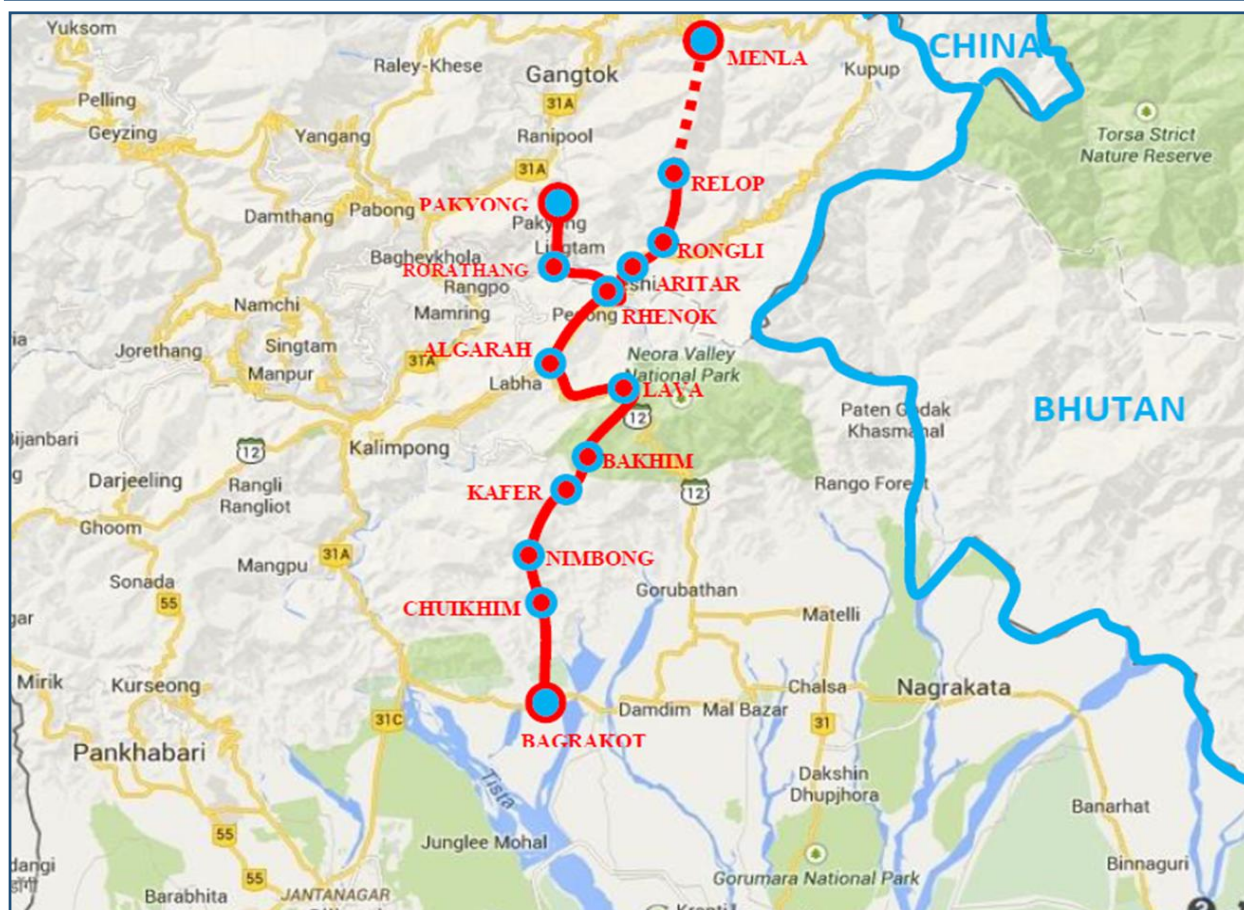

Final Detailed Project Report

July, 2020

SA INFRASTRUCTURE CONSULTANTS PVT. LTD.

IN ASSOCIATION WITH
SPECIALIZED ENGINEERING SERVICES PVT. LTD.
1101A, Xlth Floor, Tower A/2, Corporate Park, Plot No. 7A/1,



SCHEDULE - A
(See Clauses 2.1 and 8.1)

SITE OF THE PROJECT

1. The Site

- 1.1 Site of the Rongli - Chochenpheri Section of NH-717B Project Highway shall include the land, buildings, structures and road works as described in Annex-I of this Schedule-A.
- 1.2 The dates of handing over the Right of Way to the Contractor are specified in Annex-II of this Schedule-A.
- 1.3 An inventory of the Site including the land, buildings, structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Contractor, and such inventory shall form part of the memorandum referred to in Clause 8.2.(i) of this Agreement.
- 1.4 The alignment plans of the Project Highway are specified in Annex-III. In the case of sections where no modification in the existing alignment of the Project Highway is contemplated, the alignment plan has not been provided. Alignment plans have only been given for sections where the existing alignment is proposed to be upgraded. The proposed profile of the Project Highways shall be followed by the contractor with minimum FRL as indicated in the alignment plan. The Contractor, however, improve/upgrade the Road Profile as indicated in Annex-III based on site/design requirement.
- 1.5 The status of the environment clearances obtained or awaited is given in Annex IV.

Annex – I
(Schedule – A)
Site

[Note: Through suitable drawings and description in words, the land, buildings, structures and road works comprising the Site shall be specified briefly but precisely in this Annex-I. All the chainages/ location referred to in Annex-I to Schedule-A shall be existing chainages.]

1. Site

The Site of the Two-Lane Project Highway comprises the section of National Highway -717B commencing from Km 15+513 to Km 27+377 i.e. from New Rolep Bridge to Chochenpheri section of Rongli to Chochenpheri in the State of Sikkim. The land, carriageway and structures comprising the Site are described below.

2. Land

The Site of the Project Highway comprises the land (sum total of land already in possession and land to be possessed) described below:

Sr. No.	Chainage (km)		ROW (Meter)
	From	To	
1	15+513	21+877	14-16
2	21+877	27+377	6-8

3. Carriageway

The width of carriageway varies from 3.75 m to 5.00 m as under. The type of the existing pavement is Flexible.

Sr. No.	Carriageway					
	Single Lane		Two Lane		Four Lane	
	From	To	From	To	From	To
1	15+513	27+377	Nil		Nil	

4. Major Bridges

The Site includes the following Major Bridges

Sr. No.	Existing Chainage (km)	Type of Structure			No. of Spans with span length (m)	Width (m)	Remarks
		Foundation	Sub-structure	Super structure			
Nil							

5. Road over-bridges (ROB)/ Road under-bridges (RUB)

The Site includes the following ROB/RUB:

Sr. No.	Existing Chainage (km)	Type of Structure		No. of Spans with Span length (m)	Width (m)	ROB/ RUB
		Foundation	Super Structure			
NIL						

6. Grade separators

The Site includes the following grade separators:

Sr. No.	Existing Chainage (km)	Type of Structure		No. of Spans with Span length (m)	Width (m)	ROB/ RUB
		Foundation	Super Structure			
NIL						

7. Minor bridges

The Site includes the following minor bridges:

Sr. No.	Chainage (km)	Type of Structure		No. of Spans with span length (m)	Width (m)
		Foundation	Superstructure		
1	21+742	Open	Steel	1x36	4.0
2	22+084	Open	Steel	1x6.0	4.0

8. Railway level crossings

The Site includes the following railway level crossings:

Sr. No.	Existing Chainage (km)	Remarks
NIL		

9. Underpasses (vehicular, Non-vehicular)

The Site includes the following underpasses:

Sr. No.	Existing Chainage (km)	Type of Structure	No. of Spans with Span length (m)	Width (m)
Nil				

10. Culverts and causeway:

The Site has the following exiting culverts:

Sl. No.	Ex. Chainage	Type	Size	Proposal
1	16+020	RCC Slab	1x0.4	To be Replace
2	16+425	RCC Slab	1x0.4	To be Replace
3	16+492	RCC Slab	1x0.3	To be Replace
4	16+988	RCC Slab	1x0.45	To be Replace
5	17+024	RCC Slab	1x0.4	To be Replace
6	17+180	RCC Slab	1x0.5	To be Replace
7	17+556	RCC Slab	1x0.5	To be Replace
8	17+840	RCC Slab	1x0.45	To be Replace
9	18+048	RCC Slab	1x0.5	To be Replace
10	18+093	RCC Slab	1x0.3	To be Replace
11	18+648	RCC Slab	1x0.5	To be Replace

Sl. No.	Ex. Chainage	Type	Size	Proposal
12	19+073	RCC Slab	1x0.6	To be Replace
13	19+154	RCC Slab	1x0.3	To be Replace
14	19+198	RCC Slab	1x0.3	To be Replace
15	19+289	RCC Slab	1x0.6	To be Replace
16	19+713	RCC Slab	1x0.5	To be Replace
17	19+857	RCC Slab	1x0.6	To be Replace
18	19+918	RCC Slab	1x0.7	To be Replace
19	20+018	RCC Slab	1x0.7	To be Replace
20	20+222	RCC Slab	1x0.65	To be Replace
21	20+312	RCC Slab	1x0.7	To be Replace
22	20+640	RCC Slab	1x0.6	To be Replace
23	20+783	RCC Slab	1x2.5	To be Replace
24	21+082	RCC Slab	1x0.6	To be Replace
25	21+127	RCC Slab	1x3.0	To be Replace
26	21+315	RCC Slab	1x3.0	To be Replace
27	21+352	RCC Slab	1x3.0	To be Replace
28	21+465	RCC Slab	1x3.0	To be Replace

11. Bus Stops

The details of bus Stops on the Site are as follows:

Sl. No.	Existing Chainage	Sides
1	21+645	Both sides

12. Truck Lay bays

The details of truck lay byes are as follows:

Sr. No.	Existing Chainage (Km)	Length (m)	LHS	RHS
Nil				

13. Road side drains

The details of the roadside drains are as follows:

Sr. No.	Location		Type	
	From km	To km	Masonry/cc	Earthen
			(Pucca)	(Kutcha)
23	16+000	16+400	Pucca	-
24	16+450	16+550	Pucca	-
25	16+680	18+400	Pucca	-
26	18+460	18+800	Pucca	-
27	18+850	20+300	Pucca	-
28	20+400	20+950	Pucca	-
29	21+040	22+210	Pucca	-

14. Major junctions

The detail of major junction is as follows:

Sr. No.	Existing Chainage	Type	Link	Direction	Remarks
Nil					

15. Minor junctions

The details of the minor junctions are as follows:-

SL. No.	Existing Chainage	Type of intersection	Direction	Type of Road	Going to
			Left/Right	Er/BT/CC	
1	20+118	Y	Right	BT	Latuk
2	20+412	Y	Left	Er	-

16. Bypasses

The details of the existing road sections proposed to be bypassed are as follows:

Sr. No.	Name of Bypass (Town)	Existing Chainage (Km)		Length (Km)	Carriageway	
		From	To		Width (m)	Type
Nil						

17. Other structures

Nil

Annex - II
(Schedule-A)

**Dates for providing Right of Way of
construction Zone**

The dates on which the Authority shall provide Right of Way of Construction Zone to the Contractor on different stretches of the Site are stated below:


Sr. No.	From km To km	Length (Km)	Proposed ROW (m)	Date of providing ROW*
1	2	3	4	5
Full Right of Way (full width)	Excluding Bypass & Realignment, Bus bays, Truck Lay Bye	5.541	24	At appointed date
Balance Right of Way (Width)	Realignment	8.859	24	Within 90 days of declaration of appointed date
	Bypass	-	-	
	Truck Lay Bye	-	-	

*The dates specified herein shall in no case be beyond 150 (one hundred and fifty) days after the Appointed Date.

Annex - III (Schedule-A)

Alignment Plans

The existing alignment of the Project Highway shall be modified in the following sections as per the alignment plan indicated below:

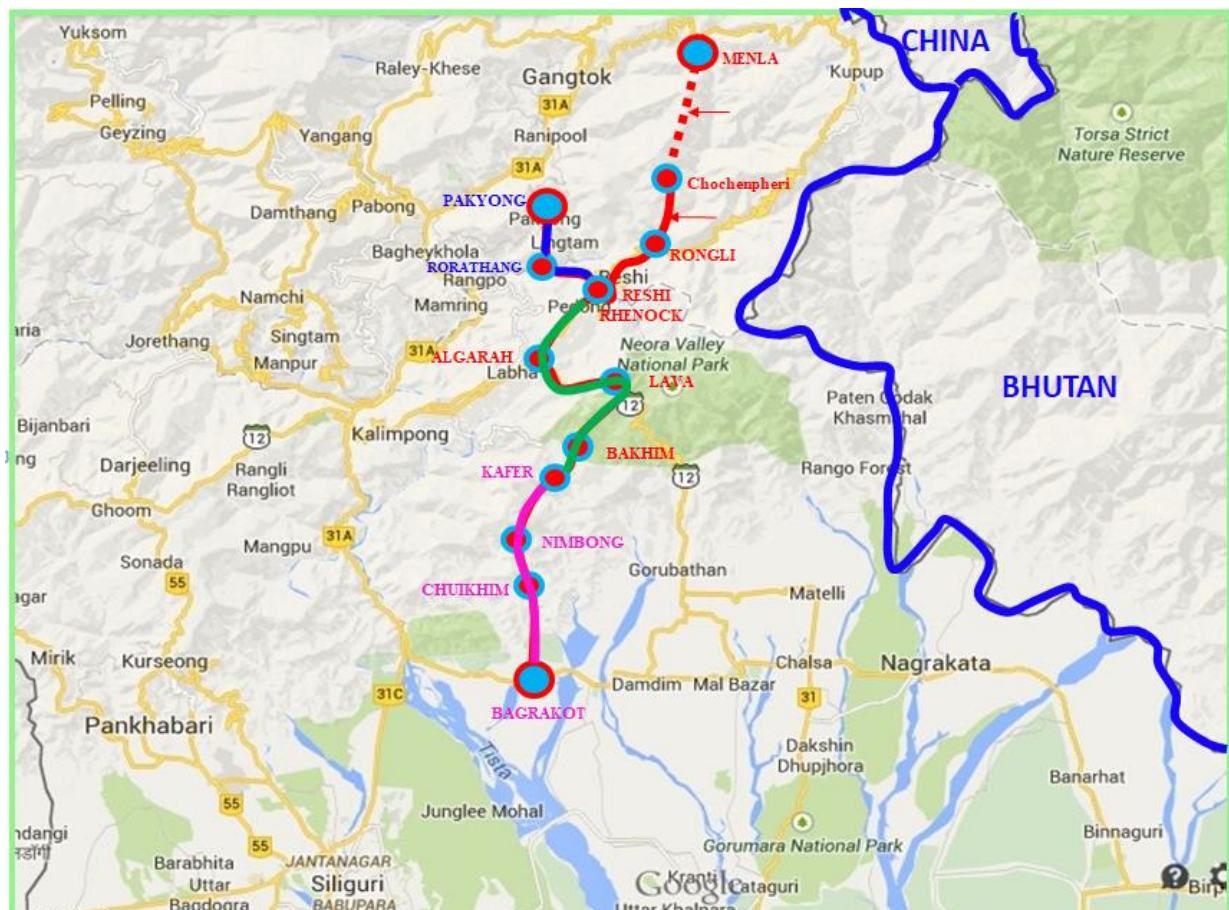

An alignment plan is given in soft copy.

The alignment of the Project Highway is enclosed in alignment plan. Finished road level indicated in the alignment plan shall be followed by the contractor as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.

Traffic Signage plan of the Project Highway showing numbers & location of traffic signs is enclosed. The contractor shall, however, improve/upgrade upon the traffic signage plan as indicated in Annex-III based on site/design requirement as per IRC: SP: 99 & IRC: 67.

Annex - IV
(Schedule-A)

Environment Clearances

The following clearances have been obtained:

Sr. No.	Clearances	Present Status
1	Environment clearance	Not Required
2	Forest Clearance	Required
3	Wildlife Approval	Not Required

SCHEDULE - B
(See Clause 2.1)

Development of the Project Highway

1 Development of the Project Highway

Development of the Project Highway shall include design and construction of the Project Highway as described in this Schedule-B and in Schedule-C.

2 Two Lane with Paved shoulder

Two laning shall be done to strengthening of the existing lane along with construction of paved shoulders as described in Annex-I of this Schedule-B and Annex-I of Schedule-C.

3 Specifications and Standards

The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-I of Schedule-D.

Annex - I
(Schedule-B)

1. Description of Two Lane with Paved Shoulder

The Site of the Two-Lane Project Highway comprises the section of National Highway -717B commencing from New Rolep Bridge at km 37+600 and ends at Chochenpheri at km 52+000 in the section of Rongli to Chochenpheri (Length 14.400 km) in the State of Sikkim. The land, carriageway and structures comprising the Site are described below.

1.1 WIDENING OF THE EXISTING HIGHWAY

The Project Highway shall follow the existing alignment unless otherwise specified by the Authority and shown in the alignment plans specified in Annexure III of Schedule-A. Geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for plain/rolling terrain to the extent land is available.

1.2 WIDTH OF CARRIAGEWAY

Two Lanning with paved shoulder shall be undertaken. The paved carriageway shall be 7m wide with 1.5m paved shoulder on both sides in accordance with the typical cross section drawings and as per IRC:SP:73-2018. On Horizontal Curves, roadways width should be increased to provide for extra widening at Curves as per Cl. 6.8.5 of IRC:SP:48-1998.

Provided that in the built-up areas the width of the carriageway shall be as specified in the following table:

Sl. No	Built-up Stretch (Township)	Start chainage	End chainage	Length (Km)	Width (m)	Typical Cross Section No.
Nil						

- 1.2.1** Except as otherwise provided in this Agreement, the width of the paved carriageway and cross-sectional features shall conform to paragraph 1.1 above.

2. GEOMETRIC DESIGN AND GENERAL FEATURES

2.1 General

Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the Manual.

2.2 Design speed

The design speed shall be minimum design speed of 20/40 km per hr. for Mountainous and Steep terrain.

2.3 Improvement of the existing road geometrics

2.3.1 Details of Bypass

Sr. No.	Existing Chainage		Length (m)	Design Chainage		Length (km)	Remarks
	From	To		From	To		
Nil							

2.3.2 Realignment :

S.No	Proposed Chainage		Length	Type of Alignment	TCS
	From	To			
1.	37.600	37.860	0.260	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
2.	38.200	38.250	0.050	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
3.	38.330	38.500	0.170	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
4.	38.750	38.800	0.050	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
5.	39.000	39.260	0.260	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
6.	39.800	39.940	0.140	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
7.	40.400	40.630	0.230	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
8.	41.000	41.150	0.150	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Valley section)	VIIIA
9.	41.250	41.400	0.150	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
10.	41.480	41.550	0.070	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
11.	41.900	42.160	0.260	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
12.	42.820	42.920	0.100	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
13.	44.300	44.444	0.144	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
14.	44.525	44.805	0.280	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
15.	44.815	45.736	0.921	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
16.	45.736	46.420	0.684	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
17.	46.420	46.790	0.370	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

S.No	Proposed Chainage		Length	Type of Alignment	TCS
	From	To			
18.	46.790	47.760	0.970	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
19.	47.900	48.460	0.560	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
20.	48.460	48.680	0.220	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
21.	48.680	48.940	0.260	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
22.	49.100	49.640	0.540	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
23.	49.640	49.890	0.250	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
24.	49.950	50.230	0.280	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
25.	50.350	50.360	0.010	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
26.	50.360	50.750	0.390	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
27.	50.790	51.110	0.320	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
28.	51.230	51.710	0.480	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
29.	51.710	51.860	0.150	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
30.	51.860	52.000	0.140	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
Total Length (km)				8.859	

2.4 Right of Way

Details of the Right of Way are given in Annex II of Schedule-A.

2.5 Type of shoulders

In built-up sections, 1.5m footpath cum drain and 2x1.5m paved shoulders shall be provided in the following stretches:

Sl. No.	Design Chainage		Length (m)	Fully Paved Shoulder/Foothpath	Reference to Cross Section (TCS)
	From	To			
Nil					

- (a) In open country, (Paved shoulders of 1.5 m width shall be provided and 1.0m earthen shoulder shall be provided on valley side as per IRC:SP-73-2018).

Sl. No	Proposed Chainage		Length (Km)	Fully Paved Shoulder/Foothpath
1.	37.600	37.860	0.260	Paved shoulder
2.	38.020	38.100	0.080	Paved shoulder
3.	38.100	38.200	0.100	Paved shoulder
4.	38.200	38.250	0.050	Paved shoulder
5.	38.330	38.500	0.170	Paved shoulder
6.	38.500	38.580	0.080	Paved shoulder
7.	38.580	38.750	0.170	Paved shoulder
8.	38.750	38.800	0.050	Paved shoulder
9.	39.000	39.260	0.260	Paved shoulder
10.	39.260	39.460	0.200	Paved shoulder
11.	39.520	39.800	0.280	Paved shoulder
12.	39.800	39.940	0.140	Paved shoulder
13.	39.940	40.350	0.410	Paved shoulder
14.	40.400	40.630	0.230	Paved shoulder
15.	40.630	41.000	0.370	Paved shoulder
16.	41.000	41.150	0.150	Paved shoulder
17.	41.150	41.250	0.100	Paved shoulder
18.	41.250	41.400	0.150	Paved shoulder
19.	41.480	41.550	0.070	Paved shoulder
20.	41.550	41.900	0.350	Paved shoulder
21.	41.900	42.160	0.260	Paved shoulder
22.	42.160	42.820	0.660	Paved shoulder
23.	42.820	42.920	0.100	Paved shoulder
24.	42.920	43.640	0.720	Paved shoulder
25.	43.840	44.300	0.460	Paved shoulder
26.	44.300	44.444	0.144	Paved shoulder
27.	44.484	44.525	0.041	Paved shoulder
28.	44.525	44.805	0.280	Paved shoulder
29.	44.815	45.736	0.921	Paved shoulder
30.	45.736	46.420	0.684	Paved shoulder
31.	46.420	46.790	0.370	Paved shoulder
32.	46.790	47.760	0.970	Paved shoulder
33.	47.900	48.460	0.560	Paved shoulder
34.	48.460	48.680	0.220	Paved shoulder
35.	48.680	48.940	0.260	Paved shoulder
36.	49.100	49.640	0.540	Paved shoulder
37.	49.640	49.890	0.250	Paved shoulder
38.	49.950	50.230	0.280	Paved shoulder
39.	50.350	50.360	0.010	Paved shoulder
40.	50.360	50.750	0.390	Paved shoulder
41.	50.790	51.110	0.320	Paved shoulder
42.	51.230	51.710	0.480	Paved shoulder
43.	51.710	51.860	0.150	Paved shoulder
44.	51.860	52.000	0.140	Paved shoulder

- (b) Design and specifications of paved shoulders and granular material shall conform to the requirements specified in paragraphs 5.9.9 and 5.9.10 of the Manual.

2.6 Lateral and vertical clearances at underpasses

- 2.6.1 Lateral and vertical clearances at underpasses and provision of guard rails/crash barriers shall be as per paragraph 2.11 of 2-lanning Manual.

- 2.6.2 Lateral clearance: The width of the opening at the underpasses shall be as follows:

Sr. No.	Location Chainage (From km to km)	Span / Opening (m)	Remarks
Nil			

Vertical clearance: Vertical Clearance at underpasses/Flyovers shall not be less than 5.5 m and for Cattle underpass shall not be less than 4.5 m.

2.7 Lateral and vertical clearances at overpasses

- 2.7.1 Lateral and vertical clearances at overpasses shall be as per paragraph 2.11 of the 2-lanning Manual.

- 2.7.2 Lateral clearance: The width of the opening at the overpasses shall be as follows:

Sr. No.	Design Chainage (Km)	Span / Opening (m)	Remarks
Nil			

- 2.7.3 Vertical clearance: A minimum 5.5 m vertical clearance shall be provided at all points of the carriageway of the project highway.

2.8 Service roads

Service roads shall be constructed at the locations and for the lengths indicated below:

Sr. No.	Location of Service road (from km to km)	Right hand side (RHS)/ Left hand side (LHS)/ or Both sides	Length (km) of Service road
Nil			

Details of Slip Road

Sr. No.	Existing Chainage		Design Chainage		Right Hand side(RHS) or Left Hand side (LHS) or Both side	Length Km of Service Road
	From	To	From	To		
NIL						

2.9 Grade separated structures

- 2.9.1 Grade separated structures shall be provided as per paragraph 2.14 of the 2-lanning Manual. The requisite particulars are given below:
[Refer to paragraphs 2.14.1 of the Manual and provide details]

Sr. No.	Location of structure (Existing)	Location of structure (Design)	Length (m)	Number & length of Spans (m)	Approach Gradient	Remarks, if any
NIL						

- 2.9.2** In the case of grade separated structures, the type of structure and the level of the Project Highway and the cross roads shall be as follows: [Refer to paragraphs 2.14.2 of the Manual and specify the type of vehicular under pass/ overpass structure and whether the cross road is to be carried at the existing level, raised or lowered]

Sr. No.	Location (Design Chainage)	Location (Design Chainage)	Type of Structure Length	Cross road at		
				Existing level	Raised Level	Lowered Level
NIL						

2.10 Cattle and pedestrian underpass /overpass

Cattle and pedestrian underpass/ overpass shall be constructed as follows:

[Refer to paragraphs 2.13.3 of the Manual and specify the requirements of Cattle and pedestrian underpass/ overpass].

2.11 Typical cross-sections of the Project Highway

Indicative typical cross section of the Project highway shall be Fig. 2.8 to 2.9 of the manual (IRC: SP: 73-2018).

Summary of TCS

S.No	TCS Description	TCS Type	Length (km)
1.	Two lane with Paved shoulder Concentric Widening (One Side Hill, One side Valley section)	I	0.100
2.	Two lane including climbing lane with one side Paved shoulder Eccentric Widening left side (One Side Hill, One side Valley section)	II	0.410
3.	Two lane with Paved shoulder Eccentric Widening right side (One Side Hill, One side Valley section)	III	0.080
4.	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV	1.800
5.	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA	0.734
6.	Two lane with Paved shoulder Concentric Widening (Both Side Hill)	V	0.170
7.	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA	1.051
8.	Two lane with Paved shoulder Concentric (Both Side Valley section)	VI	0.280

S.No	TCS Description	TCS Type	Length (km)
9.	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA	1.930
10	Two lane with Paved shoulder Realignment (Both Side Hill)	VII	3.984
11	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA	1.561
12	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII	0.630
13	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Valley section)	VIIIA	0.150
14	Elevated Structure	IX	1.470
15		Bridge	0.050
	Total		14.400

Indicative Chainage with applicable Typical Cross section :

S. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
1	37.600	37.860	0.260	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
2	37.860	38.020	0.160	Elevated Structure	IX
3	38.020	38.100	0.080	Two lane with Paved shoulder Conncentric (Both Side Valley section)	VI
4	38.100	38.200	0.100	Two lane with Paved shoulder Concentric Widening (One Side Hill, One side Valley section)	I
5	38.200	38.250	0.050	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
6	38.250	38.330	0.080	Elevated Structure	IX
7	38.330	38.500	0.170	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
8	38.500	38.580	0.080	Two lane with Paved shoulder Eccentric Widening right side (One Side Hill, One side Valley section)	III
9	38.580	38.750	0.170	Two lane with Paved shoulder Concentric Widening (Both Side Hill)	V

S. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
10	38.750	38.800	0.050	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
11	38.800	39.000	0.200	Elevated Structure	IX
12	39.000	39.260	0.260	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
13	39.260	39.460	0.200	Two lane with Paved shoulder Conncentric (Both Side Valley section)	VI
14	39.460	39.520	0.060	Elevated Structure	IX
15	39.520	39.800	0.280	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
16	39.800	39.940	0.140	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
17	39.940	40.350	0.410	Two lane including climbing lane with one side Paved shoulder Eccentric Widening left side (One Side Hill, One side Valley section)	II
18	40.350	40.400	0.050	Elevated Structure	IX
19	40.400	40.630	0.230	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
20	40.630	41.000	0.370	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
21	41.000	41.150	0.150	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Valley section)	VIIIA
22	41.150	41.250	0.100	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
23	41.250	41.400	0.150	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
24	41.400	41.480	0.080	Elevated Structure	IX
25	41.480	41.550	0.070	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
26	41.550	41.900	0.350	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA

S. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
27	41.900	42.160	0.260	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
28	42.160	42.820	0.660	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA
29	42.820	42.920	0.100	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
30	42.920	43.640	0.720	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
31	43.640	43.840	0.200	Elevated Structure	IX
32	43.840	44.300	0.460	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
33	44.300	44.444	0.144	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	IVA
34	44.444	44.484	0.040	Minor Bridge	Bridge
35	44.484	44.525	0.041	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA
36	44.525	44.805	0.280	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
37	44.805	44.815	0.010	Minor Bridge	Bridge
38	44.815	45.736	0.921	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	VIIA
39	45.736	46.420	0.684	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
40	46.420	46.790	0.370	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
41	46.790	47.760	0.970	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
42	47.760	47.900	0.140	Elevated Structure	IX
43	47.900	48.460	0.560	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
44	48.460	48.680	0.220	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII

S. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
45	48.680	48.940	0.260	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
46	48.940	49.100	0.160	Elevated Structure	IX
47	49.100	49.640	0.540	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
48	49.640	49.890	0.250	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
49	49.890	49.950	0.060	Elevated Structure	IX
50	49.950	50.230	0.280	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
51	50.230	50.350	0.120	Elevated Structure	IX
52	50.350	50.360	0.010	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
53	50.360	50.750	0.390	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
54	50.750	50.790	0.040	Elevated Structure	IX
55	50.790	51.110	0.320	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
56	51.110	51.230	0.120	Elevated Structure	IX
57	51.230	51.710	0.480	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	IV
58	51.710	51.860	0.150	Two lane with Paved shoulder Realignment (Both Side Hill)	VII
59	51.860	52.000	0.140	Two lane with Paved shoulder Realignment (Both Side Valley section)	VIII
Total Length (km)			14.400		

3. INTERSECTIONS AND GRADE SEPARATORS

All intersections and grade separators shall be as per Section 3 of the Manual. Existing intersections which are deficient shall be improved to the prescribed standards. Properly designed intersections shall be provided at the locations and of the types and features given in the tables below:

3.1 At-Grade Intersection:

3.1.1 Major intersections

At grade major intersections shall be improved at intersecting roads with the Project highway is given below:

Sr. No.	Existing Chainage	Proposed Chainage	Type	Link	Direction	Remarks
Nil						

3.1.2 Minor Intersections

At grade minor intersections shall be improved at intersecting roads with the Project highway is given below:

Sl. No.	Design Chainage	Type of intersection	Direction	Type of Road
			(Left/Right)	(E/BT/CC)
1.	42+700	Y	RHS	BT
2.	43+020	T	LHS	Earthen
3.	45+600	Y	LHS	BT
4.	51+100	Y	LHS	Earthen

4. Road Embankment and Cut Section

(i) Widening and improvement of the existing road embankment/cuttings and construction of new road embankment/ cuttings shall conform to the Specifications and Standards given in section 4 of the Manual and the specified cross sectional details. Deficiencies in the plan and profile of the existing road shall be corrected.

(ii) Raising of the existing road:

The existing road shall be raised in the following sections:

Sl. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
1.	38.020	38.100	0.080	Two lane with Paved shoulder Concentric (Both Side Valley section)	VI
2.	38.100	38.200	0.100	Two lane with Paved shoulder Concentric Widening (One Side Hill, One side Valley section)	I
3.	38.500	38.580	0.080	Two lane with Paved shoulder Eccentric Widening right side (One Side Hill, One side Valley section)	III
4.	38.580	38.750	0.170	Two lane with Paved shoulder Concentric Widening (Both Side Hill)	V
5.	39.260	39.460	0.200	Two lane with Paved shoulder Concentric (Both Side Valley section)	VI
6.	39.520	39.800	0.280	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA

Sl. No	Proposed Chainage		Length (Km)	Type of alignment	TCS
	From (Km)	To (Km)			
7.	39.940	40.350	0.410	Two lane including climbing lane with one side Paved shoulder Eccentric Widening left side (One Side Hill, One side Valley section)	II
8.	40.630	41.000	0.370	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
9.	41.150	41.250	0.100	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
10	41.550	41.900	0.350	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA
11	42.160	42.820	0.660	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA
12	42.920	43.640	0.720	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
13	43.840	44.300	0.460	Two lane including climbing lane with one side Paved shoulder Concentric (Both Side Valley section)	VIA
14	44.484	44.525	0.041	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	VA

5. PAVEMENT DESIGN

Pavement design shall be carried out for a design life of 20 years considering 25 MSA as per IRC 37-2018.

Note: 1. The minimum CBR of subgrade is 10%.

5.1 Type of pavement

Flexible pavement shall be adopted for the Main carriageway in the open country and rigid pavement in the built up section as per the details given below:

Crust composition (Minimum) for flexible pavement:

BC	40 mm
BSM	110 mm
CTSB	200 mm
SUBGRADE	500 mm

Crust composition (Minimum) for Rigid pavement:

PQC	300 mm
DLC	150 mm
GSB	150 mm
SUBGRADE	500 mm

5.2 Design requirements

5.2.1 Design Period and strategy

Flexible Pavement shall be designed.

5.2.2 Design Traffic

Notwithstanding anything to the contrary contained in this Agreement or the Manual, the Contractor shall design the pavement for design traffic of 25 million standard axles.

5.3 Reconstruction of stretches

The stretches mention in clause 4 (ii) of the same document shows the table of the existing road that shall be reconstructed.

6. ROAD SIDE DRAINAGE

Drainage system including surface and subsurface drains for the Project Highway shall be provided as per Section 6 of the Manual.

Lined Drain Location:

S.No	Description	Side	Length (km)	Total Length
1.	Two lane with Paved shoulder Concentric Widening (One Side Hill, One side Valley section)	1	0.100	0.100
2.	Two lane including climbing lane with one side Paved shoulder Eccentric Widening left side (One Side Hill, One side Valley section)	1	0.410	0.410
3.	Two lane with Paved shoulder Eccentric Widening right side (One Side Hill, One side Valley section)	1	0.080	0.080
4.	Two lane with Paved shoulder Realignment (One Side Hill, One side Valley section)	1	1.800	1.800
5.	Two lane including climbing lane with one side Paved shoulder Realignment (One Side Hill, One side Valley section)	1	0.734	0.734
6.	Two lane with Paved shoulder Concentric Widening (Both Side Hill)	2	0.170	0.340
7.	Two lane including climbing lane with one side Paved shoulder Concentric Widening (Both Side Hill)	2	1.051	2.102
8.	Two lane with Paved shoulder Realignment (Both Side Hill)	2	3.984	7.968
9.	Two lane including climbing lane with one side Paved shoulder Realignment (Both Side Hill)	2	1.561	3.122
Total Length (km)				16.656

Catch Water Drains Location on Hill side (Cutting height is more than 10m)

Sr. No.	Left Side (m)	Right Side (m)
1	2470	2690

Therefore, total length of Lined & catch water drain will be **21.816 km.**

Foothpath cum Drains Location:

TCS No.	Description	Length (m)	Side	Total Length (m)
Nil				

7. DESIGN OF STRUCTURES

7.1 General

7.1.1 All bridges, culverts and structures shall be designed and constructed in accordance with section 7 of the Manual and shall conform to the cross- sectional features and other details specified therein

7.1.2 Width of the carriageway of new bridges and structures shall be as follows:
[Refer to paragraph 7.1 (ii) of the Manual and specify the width of carriageway of new bridges and structures of more than 60 (sixty) meter length, if the carriageway width is different from 7.5 (seven point five) meter including kerb shyness in the table below.]

Sr. No.	Bridge (km)	Width of carriageway and Cross - Sectional feature
Nil		

7.1.3 The following structures shall be provided with footpaths:
[Refer to paragraph 7.1 (iii) of the Manual and provide details of new Structures with footpath.]

Sr. No.	Location at km		Remarks
	(Existing Chainage)	(Design Chainage)	
Nil			

7.1.4 All bridges shall be high-level bridges.

7.1.1 The following structures shall be designed to carry utility services specified in table below:

Sr. No.	Bridge (Km)	Utility service to be carried	Remarks
NIL			

7.1.2 Cross-section of the new culverts and bridges at deck level for the Project Highway shall conform to the typical cross-sections given in section 7 of the Manual.

7.2 Culverts

Overall width of all culverts shall be equal to the roadway width of the approaches.

7.2.1 Reconstruction of Existing Culverts:

The existing culverts at the following locations shall be reconstructed as new Box culverts:

Sl. No.	Ex. Chainage	Type	Size	Proposed Chainage	Proposed Size	Type	Proposal
1	16+020	RCC Slab	1x0.4	38+064	1x2m	Box Culvert	To be Replace
2	16+425	RCC Slab	1x0.4	38+490	1x2m	Box Culvert	To be Replace
3	16+492	RCC Slab	1x0.3	38+550	1x2m	Box Culvert	To be Replace
4	16+988	RCC Slab	1x0.45	39+544	1x2m	Box Culvert	To be Replace
5	17+024	RCC Slab	1x0.4	39+566	1x2m	Box Culvert	To be Replace
6	17+180	RCC Slab	1x0.5	39+690	1x2m	Box Culvert	To be Replace
7	17+556	RCC Slab	1x0.5	40+100	1x2m	Box Culvert	To be Replace
8	17+840	RCC Slab	1x0.45	40+405	1x2m	Box Culvert	To be Replace
9	18+048	RCC Slab	1x0.5	40+604	1x2m	Box Culvert	To be Replace
10	18+093	RCC Slab	1x0.3	40+700	1x2m	Box Culvert	To be Replace
11	18+648	RCC Slab	1x0.5	41+300	1x2m	Box Culvert	To be Replace
12	19+073	RCC Slab	1x0.6	41+832	1x2m	Box Culvert	To be Replace
13	19+154	RCC Slab	1x0.3	41+914	1x2m	Box Culvert	To be Replace
14	19+198	RCC Slab	1x0.3	41+980	1x2m	Box Culvert	To be Replace
15	19+289	RCC Slab	1x0.6	42+071	1x2m	Box Culvert	To be Replace
16	19+713	RCC Slab	1x0.5	42+486	1x2m	Box Culvert	To be Replace
17	19+857	RCC Slab	1x0.6	42+620	1x2m	Box Culvert	To be Replace
18	19+918	RCC Slab	1x0.7	42+680	1x2m	Box Culvert	To be Replace
19	20+018	RCC Slab	1x0.7	42+778	1x2m	Box Culvert	To be Replace
20	20+222	RCC Slab	1x0.65	43+020	1x2m	Box Culvert	To be Replace
21	20+312	RCC Slab	1x0.7	43+112	1x2m	Box Culvert	To be Replace
22	20+640	RCC Slab	1x0.6	43+418	1x2m	Box Culvert	To be Replace
23	20+783	RCC Slab	1x2.5	43+560	1x3m	Box Culvert	To be Replace
24	21+082	RCC Slab	1x0.6	43+866	1x2m	Box Culvert	To be Replace
25	21+127	RCC Slab	1x3.0	43+912	1x3m	Box Culvert	To be Replace
26	21+315	RCC Slab	1x3.0	44+088	1x3m	Box Culvert	To be Replace
27	21+352	RCC Slab	1x3.0	44+118	1x3m	Box Culvert	To be Replace
28	21+465	RCC Slab	1x3.0	44+242	1x3m	Box Culvert	To be Replace

7.2.2 Widening and Repairing of existing culverts

All existing culverts which are not to be reconstructed shall be widened to the roadway width of the Project Highway as per the typical cross section given in section 7 of the Manual. Repairs and strengthening of existing structures where required shall be carried out.

Sl. No.	Culvert Location (Km)	Type , Span, Height and width of existing culvert	Type of Repair Required
Nil			

7.2.3 Additional New culverts shall be constructed as per Particulars given in the table below:

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Sl. No.	Proposed Chainage	Proposed Size	Type	Proposal
1	44+662	1x2m	Box Culvert	New Culvert
2	45+050	1x3m	Box Culvert	New Culvert
3	45+750	1x2m	Box Culvert	New Culvert
4	46+170	1x2m	Box Culvert	New Culvert
5	46+463	1x2m	Box Culvert	New Culvert
6	47+050	1x2m	Box Culvert	New Culvert
7	47+530	1x2m	Box Culvert	New Culvert
8	48+580	1x3m	Box Culvert	New Culvert
9	48+830	1x2m	Box Culvert	New Culvert
10	50+580	1x2m	Box Culvert	New Culvert
11	51+290	1x3m	Box Culvert	New Culvert
12	51+940	1x2m	Box Culvert	New Culvert

7.2.4 Repairs/ Replacement of Railing/Parapets, flooring and protection works of the existing culverts shall be undertaken as follows:

[Refer to paragraph 7.23 of the Manual and provide details]

Sr. No.	Existing Chainage (km)	Design Chainage (km)	Type of Culvert	Span (m)	Type of Repair
NIL					

7.2.5 Floor Protection works shall be as specified in the relevant IRC codes and specifications.

7.3 Bridges

7.3.1 Existing Bridges to be retained

(i) The existing minor bridges at the following locations shall be retained:

Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Design No. of Spans with span length (m)	Remarks
Nil				

(ii) The following Major bridges shall be reconstructed:

Sr. No.	Existing Chainage (Km)	Design Chainage (Km)	Design no. of Spans with span length (m)	Remarks
Nil				

(iii) The following Minor bridges shall be reconstructed:

Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Design no. of Spans with span length (m)	Existing no. of Spans with span length (m)	Existing Structure	Proposed Structure
1	21+742	44+464	2x20m	1x36	Steel Bridge	Voided Slab
2	22+084	44+810	1x10m	1x6.0	Steel Bridge	Solid Slab

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

7.3.2 Additional New Bridges

- a. New major bridge at the following locations on the project highway shall be constructed.
GADs for the new bridges are attached in the drawings folder:

Sr. No.	Location		Span Arrangement	Total length (m)	Remarks
	Existing Chainage (Km)	Design Chainage (Km)			
NIL					

- b. New minor bridges at the following locations on the project highway shall be constructed.
GADs for the new bridges are attached in the drawings folder:

Sr. No.	Design Chainage	Span Arrangement	Total length (m)	Remarks
NIL				

- 7.3.3 The railings of existing bridges shall be Reconstruction by crash barriers at the following locations:

Sr. No.	Location (km)	Remarks
Nil		

- 7.3.4 Repairs/ replacements of railing/parapets of the existing bridges shall be undertaken as follows:

Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Existing no. of Spans with span length (m)	Remarks
Nil				

7.3.5 Drainage system for bridge decks

An effective drainage system for bridge decks shall be provided as specified in paragraph 7.21 of the Manual.

7.3.6 Structures in marine environment

[Refer to paragraph 7.22 of the Manual and specify the necessary measures / treatments for protecting structures in marine environment, where applicable]

7.4 Rail - Road Bridges

- 7.4.1 Design, construction and detailing of ROB/RUB shall be as specified in section 7 of the Manual. (Refer to paragraph 7.19 of the Manual and specify modification, if any)

7.4.2 Road Over-Bridges section

Road over-bridges (road over railway line) shall be provided at the following level crossings, as per manual:

Sl. No.	Location of Level crossing (Chainage km)	Length of bridge (m)	Type of structure	Remarks
NIL				

7.4.3 Road under-Bridges

Road under-bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

Sl. No.	Location of Level crossings (km)	Number and length of Span (m)
Nil		

7.5 Grade separated structures

(Refer to paragraph 7.20 of the Manual)

The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2.9 and 3 of this Annex-I.

Sr. No.	Design Chainage	Span Arrangement	Total length (m)	Remarks
Nil				

7.6 Repairs and strengthening of bridges and structures

(Refer to paragraph 7.23 of the Manual and provide details)

All the existing bridges and structures to be repaired / strengthened, and the nature and extent of repairs/ strengthening required are given below:

A. Bridges

Sl. No.	Location / Design Chainage (In km)/Span	Side (LHS/RHS)	Nature and Extent of Repairs / Strengthening to be carried out
Nil			

B. ROB / RUB

Sl. No.	Location / Design Chainage (In km)	Side (LHS/RHS)	Nature and Extent of Repairs / Strengthening to be carried out
Nil			

C. Overpass / Underpass and Other structures

Sr. No.	Location / Design Chainage (In km)	Side (LHS/RHS)	Nature and Extent of Repairs/ Strengthening to be carried out
Nil			

7.7 List of Structures

Viaduct: The minimum requirement of Viaducts are suggested as following which may vary as per final drawings and design approved by competent authority. The Contractor is required to conduct detail investigation to assess the work based on site survey, investigations and assessment before commencement of work. Viaduct shall be provided where embankment height is more than 10m. Tentative locations of the Viaduct are given below :

Sl.	From (km)	To (km)	Length (km)	Length (m)	Span-Arrangement	Extra Widening
1	37.860	38.020	0.16	160.00	8x20m	0.9 m
2	38.250	38.330	0.08	80.00	4x20m	1.5 m
3	38.800	39.000	0.20	200.00	10x20m	0.9 m
4	39.460	39.520	0.06	60.00	3x20m	1.5 m
5	40.350	40.400	0.05	50.00	20m+30m	1.5 m
6	41.400	41.480	0.08	80.00	4x20m	1.5 m

Sl.	From (km)	To (km)	Length (km)	Length (m)	Span-Arrangement	Extra Widening
7	43.640	43.840	0.20	200.00	10x20m	0.9 m
8	47.760	47.900	0.14	140.00	7x20m	1.5 m
9	48.940	49.100	0.16	160.00	8x20m	0.9 m
10	49.890	49.950	0.06	60.00	3x20m	1.5 m
11	50.230	50.350	0.12	120.00	4x30m	Nil
12	50.750	50.790	0.04	40.00	2x20m	0.6 m
13	51.110	51.230	0.12	120.00	6x20m	0.9 m
Total Length (m)			1.47	1470.00		

***NOTE:-** The viaduct length mention above is exclusive of box abutment length. For total length of the elevated structure refer clause 2.11 and clause 13 of the same document.

8. TRAFFIC CONTROL DEVICES AND ROAD SAFETY WORKS

8.1 Traffic control devices and road safety works shall be provided in accordance with Section 9 of the Manual.

- (a) Traffic Signs: Traffic signs include roadside signs, overhead signs and curb mounted signs along the entire Project Highway.
- (b) Pavement Marking: Pavement markings shall cover road marking for the entire Project Highway.
- (c) Safety Barrier: Provide parapet along the project highway at all locations as specified in manual recommended in Schedule D.

8.2 Specifications of the reflecting sheeting.

Retro reflective sheeting should be of high intensity grade with encapsulated lens or with micro prismatic retro reflective element in accordance with ASTM Standard D 4956-04 and IRC 67:2010 shall be provided.

9. ROADSIDE FURNITURE

9.1 Roadside furniture shall be provided in accordance with the provisions of section 11 of the Manual.

- (a) Road Boundary Stone: For the entire Project Highway.
- (b) Pedestrian Guard Rail: The pedestrian facilities shall include the provision of the;
 - (i) Pedestrian guardrail: Provide pedestrian guardrail at each bus stop location.
 - (ii) Pedestrian Crossings: Provide pedestrian crossing facilities on Junctions.
- (c) Overhead traffic signs: Location and Size
 - (i) Full width Overhead signs: Full width Overhead signs shall be provided as suggested in manual recommended in Schedule D.
 - (ii) Cantilever Overhead signs: Overhead signs shall be provided as suggested in manual recommended in Schedule D.
 - (iii) Delineators: Delineators for the entire Project Highway at the locations as suggested in manual recommended in Schedule D. The minimum number of 2089 delineators to be provided in the curve portions for the entire project highway.

Note:- The no. of delineators mentioned above is minimum. Any increase in numbers shall not be constitute a Change of Scope

- (iv) Chevrons: Chevrons sign boards for the entire Project Highway at the locations as suggested in manual recommended in Schedule D. The minimum number of 2089 delineators to be provided in the curve portions for the entire project highway.

Note:- The no. of chevrons mentioned above is minimum. Any increase in numbers shall not be constitute a Change of Scope

10. COMPULSORY AFFORESTATION

The number of Trees which are required to be planted by the contractor as compensatory afforestation should be as per Forest Conservation Act, twice the number of trees to be cut.

11. HAZARDOUS LOCATIONS

The safety barriers (Parapet wall) shall also be provided at valley side for a length of 9.104 Km. Parapet wall will construct at site as per requirement of location.

12. Special Requirement for Hill Roads

- 12.1 Retaining Wall:** - The minimum requirement of Retaining wall are suggested as following which may vary as per final drawings and design approved by competent authority. The Contractor is required to conduct detail investigation to assess the work based on site survey, investigations and assessment before commencement of work.

Retaining Walls Locations LHS:

Filling Left					Filling Left				
S.no	Chainge From	Chainge To	Length (m)	Ht (m)	S.no	Chainge From	Chainge To	Length (m)	Ht (m)
1	37830	37840	10	6	121	43530	43540	10	9
2	37840	37850	10	8	122	43540	43550	10	10
3	38020	38030	10	8	123	43550	43560	10	10
4	38030	38040	10	7	124	43560	43570	10	9
5	38040	38050	10	7	125	43570	43580	10	8
6	38050	38060	10	6	126	43580	43590	10	7
7	38060	38070	10	4	127	43590	43600	10	7
8	38330	38340	10	8	128	43600	43610	10	6
9	38370	38380	10	5	129	43610	43620	10	5
10	39250	39260	10	5	130	43620	43630	10	5
11	39260	39270	10	4	131	43840	43850	10	8
12	39330	39340	10	4	132	43850	43860	10	9
13	39340	39350	10	7	133	43860	43870	10	8
14	39350	39360	10	9	134	43870	43880	10	8
15	39360	39370	10	9	135	43880	43890	10	8
16	39370	39380	10	9	136	43890	43900	10	8
17	39380	39390	10	8	137	43900	43910	10	8
18	39390	39400	10	7	138	43910	43920	10	8
19	39400	39410	10	6	139	43920	43930	10	7

Filling Left					Filling Left				
S.no	Chainge From	Chainge To	Length (m)	Ht (m)	S.no	Chainge From	Chainge To	Length (m)	Ht (m)
20	39410	39420	10	7	140	43930	43940	10	7
21	39420	39430	10	7	141	43940	43950	10	7
22	39430	39440	10	7	142	43950	43960	10	7
23	39440	39450	10	7	143	43960	43970	10	7
24	39520	39530	10	6	144	43970	43980	10	6
25	39640	39650	10	6	145	43980	43990	10	6
26	39660	39670	10	7	146	43990	44000	10	6
27	39670	39680	10	10	147	44000	44010	10	5
28	39680	39690	10	10	148	44010	44020	10	5
29	39690	39700	10	9	149	44020	44030	10	5
30	39700	39710	10	7	150	44030	44040	10	5
31	39710	39720	10	8	151	44040	44050	10	4
32	39720	39730	10	9	152	44050	44060	10	4
33	39730	39740	10	5	153	44060	44070	10	4
34	39740	39750	10	5	154	44070	44080	10	4
35	39750	39760	10	6	155	44190	44200	10	5
36	39760	39770	10	5	156	44200	44210	10	5
37	40090	40100	10	4	157	44210	44220	10	5
38	40850	40860	10	5	158	44220	44230	10	6
39	40860	40870	10	5	159	44230	44240	10	5
40	40870	40880	10	5	160	44240	44250	10	4
41	40880	40890	10	6	161	44270	44280	10	4
42	40890	40900	10	6	162	44280	44290	10	6
43	40900	40910	10	7	163	44290	44300	10	5
44	40910	40920	10	6	164	44440	44450	10	4
45	40920	40930	10	6	165	44450	44460	10	7
46	40930	40940	10	6	166	44460	44470	10	11
47	40940	40950	10	6	167	44480	44490	10	9
48	40950	40960	10	7	168	44650	44660	10	5
49	40960	40970	10	8	169	44660	44670	10	5
50	40970	40980	10	8	170	46590	46600	10	4
51	40980	40990	10	7	171	46600	46610	10	7
52	40990	41000	10	8	172	46610	46620	10	8
53	41000	41010	10	9	173	46620	46630	10	8
54	41010	41020	10	9	174	46630	46640	10	8
55	41020	41030	10	9	175	46640	46650	10	7
56	41030	41040	10	6	176	46650	46660	10	5
57	41040	41050	10	7	177	47490	47500	10	5
58	41050	41060	10	6	178	47500	47510	10	6
59	41060	41070	10	5	179	47510	47520	10	7
60	41070	41080	10	8	180	47520	47530	10	8
61	41110	41120	10	5	181	47530	47540	10	10
62	41120	41130	10	9	182	47540	47550	10	8

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Filling Left					Filling Left				
S.no	Chainge From	Chainge To	Length (m)	Ht (m)	S.no	Chainge From	Chainge To	Length (m)	Ht (m)
63	41130	41140	10	8	183	47550	47560	10	6
64	41140	41150	10	8	184	47720	47730	10	4
65	41150	41160	10	7	185	47730	47740	10	5
66	41160	41170	10	7	186	47740	47750	10	7
67	41170	41180	10	8	187	47900	47910	10	7
68	41180	41190	10	8	188	47920	47930	10	4
69	41190	41200	10	8	189	47930	47940	10	4
70	41200	41210	10	8	190	48510	48520	10	4
71	41210	41220	10	8	191	48520	48530	10	6
72	41220	41230	10	8	192	48530	48540	10	6
73	41230	41240	10	9	193	48540	48550	10	6
74	41240	41250	10	6	194	48550	48560	10	6
75	41370	41380	10	6	195	48560	48570	10	7
76	41380	41390	10	8	196	48570	48580	10	8
77	41480	41490	10	7	197	48580	48590	10	7
78	41490	41500	10	5	198	48590	48600	10	7
79	41530	41540	10	7	199	48600	48610	10	8
80	41540	41550	10	7	200	48610	48620	10	9
81	41550	41560	10	7	201	48620	48630	10	9
82	41560	41570	10	6	202	48630	48640	10	5
83	41570	41580	10	5	203	49770	49780	10	5
84	41580	41590	10	4	204	49780	49790	10	7
85	41920	41930	10	4	205	49790	49800	10	8
86	41930	41940	10	6	206	49800	49810	10	8
87	41940	41950	10	8	207	49810	49820	10	8
88	41950	41960	10	5	208	49820	49830	10	8
89	43210	43220	10	4	209	49830	49840	10	8
90	43220	43230	10	4	210	49840	49850	10	10
91	43230	43240	10	5	211	49850	49860	10	9
92	43240	43250	10	5	212	49860	49870	10	9
93	43250	43260	10	5	213	49870	49880	10	9
94	43260	43270	10	6	214	51090	51100	10	6
95	43270	43280	10	6	215	51230	51240	10	10
96	43280	43290	10	6	216	51240	51250	10	11
97	43290	43300	10	5	217	51250	51260	10	9
98	43300	43310	10	6	218	51260	51270	10	7
99	43310	43320	10	7	219	51270	51280	10	8
100	43320	43330	10	8	220	51280	51290	10	8
101	43330	43340	10	8	221	51290	51300	10	7
102	43340	43350	10	7	222	51300	51310	10	7
103	43350	43360	10	7	223	51310	51320	10	6
104	43360	43370	10	7	224	51320	51330	10	5
105	43370	43380	10	7	225	51640	51650	10	4

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Filling Left					Filling Left				
S.no	Chainge From	Chainge To	Length (m)	Ht (m)	S.no	Chainge From	Chainge To	Length (m)	Ht (m)
106	43380	43390	10	6	226	51650	51660	10	4
107	43390	43400	10	6	227	51860	51870	10	4
108	43400	43410	10	6	228	51870	51880	10	5
109	43410	43420	10	6	229	51880	51890	10	5
110	43420	43430	10	6	230	51890	51900	10	6
111	43430	43440	10	6	231	51900	51910	10	6
112	43440	43450	10	6	232	51910	51920	10	6
113	43450	43460	10	7	233	51920	51930	10	7
114	43460	43470	10	7	234	51930	51940	10	6
115	43470	43480	10	7	235	51940	51950	10	7
116	43480	43490	10	7	236	51950	51960	10	8
117	43490	43500	10	8	237	51960	51970	10	8
118	43500	43510	10	8	238	51970	51980	10	7
119	43510	43520	10	9	239	51980	51990	10	7
120	43520	43530	10	9	240	51990	52000	10	7
Total Length in m								2400	

Retaining Walls Locations RHS:

Filling Right					Filling Right				
Sl. No.	Chainage From	Chainage To	Length (m)	Ht (m)	Sl.No.	Chainage From	Chainage To	Length (m)	Ht (m)
1	37590	37600	10	5	118	43600	43610	10	8
2	38020	38030	10	5	119	43610	43620	10	9
3	38330	38340	10	7	120	43620	43630	10	7
4	39520	39530	10	6	121	43840	43850	10	8
5	39530	39540	10	5	122	43850	43860	10	7
6	39540	39550	10	5	123	43860	43870	10	6
7	39550	39560	10	5	124	43870	43880	10	5
8	39560	39570	10	5	125	43900	43910	10	7
9	39570	39580	10	5	126	43910	43920	10	6
10	39580	39590	10	5	127	43920	43930	10	6
11	39590	39600	10	5	128	43930	43940	10	5
12	39600	39610	10	5	129	43940	43950	10	5
13	39610	39620	10	5	130	43950	43960	10	4
14	39620	39630	10	5	131	44440	44450	10	6
15	39630	39640	10	5	132	44450	44460	10	7
16	39640	39650	10	5	133	44460	44470	10	11
17	39650	39660	10	5	134	46560	46570	10	4
18	39660	39670	10	5	135	46570	46580	10	7
19	39670	39680	10	5	136	46580	46590	10	9
20	39680	39690	10	5	137	46590	46600	10	10
21	39690	39700	10	8	138	46600	46610	10	10
22	39700	39710	10	9	139	46610	46620	10	10

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Filling Right					Filling Right				
Sl. No.	Chainage From	Chainage To	Length (m)	Ht (m)	Sl.No.	Chainage From	Chainage To	Length (m)	Ht (m)
23	39710	39720	10	8	140	46620	46630	10	10
24	39720	39730	10	7	141	46630	46640	10	10
25	39730	39740	10	7	142	46640	46650	10	10
26	39740	39750	10	6	143	46650	46660	10	10
27	39750	39760	10	7	144	46660	46670	10	10
28	39760	39770	10	6	145	46670	46680	10	10
29	39770	39780	10	6	146	46680	46690	10	10
30	39810	39820	10	4	147	46690	46700	10	8
31	39820	39830	10	7	148	46700	46710	10	8
32	39830	39840	10	8	149	46710	46720	10	6
33	39840	39850	10	9	150	46720	46730	10	5
34	39850	39860	10	9	151	46740	46750	10	5
35	39860	39870	10	7	152	46750	46760	10	7
36	40010	40020	10	4	153	46760	46770	10	7
37	40020	40030	10	4	154	46770	46780	10	7
38	40320	40330	10	5	155	46780	46790	10	4
39	40330	40340	10	7	156	47520	47530	10	4
40	40400	40410	10	9	157	47530	47540	10	6
41	40410	40420	10	9	158	48450	48460	10	5
42	40420	40430	10	7	159	48460	48470	10	9
43	40430	40440	10	6	160	48470	48480	10	9
44	40770	40780	10	5	161	48480	48490	10	8
45	40780	40790	10	5	162	48490	48500	10	8
46	40790	40800	10	4	163	48500	48510	10	9
47	40800	40810	10	5	164	48510	48520	10	10
48	40810	40820	10	5	165	48520	48530	10	10
49	40820	40830	10	6	166	48530	48540	10	10
50	40830	40840	10	6	167	48540	48550	10	10
51	40840	40850	10	7	168	48550	48560	10	10
52	40850	40860	10	7	169	48560	48570	10	10
53	40860	40870	10	7	170	48570	48580	10	10
54	40870	40880	10	8	171	48580	48590	10	10
55	40880	40890	10	8	172	48590	48600	10	10
56	40890	40900	10	8	173	48600	48610	10	11
57	40900	40910	10	8	174	48610	48620	10	10
58	40910	40920	10	9	175	48620	48630	10	9
59	40920	40930	10	10	176	48630	48640	10	7
60	40930	40940	10	10	177	48640	48650	10	6
61	40940	40950	10	10	178	48790	48800	10	5
62	40950	40960	10	11	179	48800	48810	10	7
63	40960	40970	10	11	180	48810	48820	10	8
64	40970	40980	10	10	181	48820	48830	10	6
65	40980	40990	10	10	182	48870	48880	10	5

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Filling Right					Filling Right				
Sl. No.	Chainage From	Chainage To	Length (m)	Ht (m)	Sl.No.	Chainage From	Chainage To	Length (m)	Ht (m)
66	40990	41000	10	10	183	48880	48890	10	5
67	41000	41010	10	9	184	48890	48900	10	6
68	41010	41020	10	9	185	48900	48910	10	6
69	41020	41030	10	9	186	48910	48920	10	7
70	41030	41040	10	8	187	48920	48930	10	8
71	41040	41050	10	8	188	49100	49110	10	7
72	41050	41060	10	7	189	50180	50190	10	4
73	41060	41070	10	6	190	50190	50200	10	5
74	41070	41080	10	6	191	50200	50210	10	5
75	41080	41090	10	5	192	50210	50220	10	5
76	41090	41100	10	5	193	50350	50360	10	7
77	41150	41160	10	4	194	50360	50370	10	6
78	41160	41170	10	5	195	50370	50380	10	4
79	41170	41180	10	4	196	50380	50390	10	5
80	41180	41190	10	4	197	50390	50400	10	6
81	41190	41200	10	5	198	50400	50410	10	7
82	41200	41210	10	5	199	50410	50420	10	7
83	41210	41220	10	4	200	50420	50430	10	8
84	41220	41230	10	5	201	50430	50440	10	8
85	41230	41240	10	6	202	50440	50450	10	8
86	41240	41250	10	7	203	50450	50460	10	7
87	41250	41260	10	6	204	50460	50470	10	7
88	41260	41270	10	9	205	50470	50480	10	6
89	41270	41280	10	8	206	50480	50490	10	4
90	41280	41290	10	8	207	50490	50500	10	4
91	41290	41300	10	8	208	50500	50510	10	5
92	41300	41310	10	4	209	50510	50520	10	6
93	41350	41360	10	6	210	50520	50530	10	7
94	41360	41370	10	10	211	50530	50540	10	8
95	41370	41380	10	11	212	50540	50550	10	8
96	41380	41390	10	11	213	50550	50560	10	9
97	41480	41490	10	6	214	50560	50570	10	9
98	43400	43410	10	4	215	50570	50580	10	9
99	43410	43420	10	4	216	50580	50590	10	9
100	43420	43430	10	4	217	50590	50600	10	9
101	43430	43440	10	5	218	50600	50610	10	7
102	43440	43450	10	5	219	50610	50620	10	5
103	43450	43460	10	6	220	50730	50740	10	5
104	43460	43470	10	6	221	50790	50800	10	9
105	43470	43480	10	5	222	50800	50810	10	6
106	43480	43490	10	5	223	50900	50910	10	7
107	43490	43500	10	5	224	50910	50920	10	4
108	43500	43510	10	6	225	51090	51100	10	6

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Filling Right					Filling Right				
Sl. No.	Chainage From	Chainage To	Length (m)	Ht (m)	Sl.No.	Chainage From	Chainage To	Length (m)	Ht (m)
109	43510	43520	10	6	226	51230	51240	10	8
110	43520	43530	10	6	227	51240	51250	10	7
111	43530	43540	10	7	228	51250	51260	10	6
112	43540	43550	10	9	229	51260	51270	10	5
113	43550	43560	10	9	230	51270	51280	10	6
114	43560	43570	10	9	231	51280	51290	10	7
115	43570	43580	10	8	232	51290	51300	10	8
116	43580	43590	10	8	233	51300	51310	10	6
117	43590	43600	10	8	234	51310	51320	10	4
Total length								2340	

12.2 Breast Wall :

The minimum requirement of 4m height Breast wall are suggested as following which may vary as per final drawings and design approved by competent authority. The Contractor is required to conduct detail investigation to assess the work based on site survey, investigations and assessment before commencement of work. Hill cutting slope should not exceed 60 degrees, 1.5m benching to be provided at least every 10m height.

Breast Wall	Left Side Length (m)	Right Side Length (m)
	5410	5790

12.3 Hydroseeding

To control soil erosion and re-vegetate areas in hill side, hydroseeding to be provided in total area of 7845.1 m² by mechanical means where height is between 20-30m.

Note: Any variations in the area specified mentioned above shall not constitute a Change of Scope

12.4 Slope Protection in Hill Cut Sections (4-20m)

At location where hill cutting is between 4m to 20m, required Breast wall to be provided upto 4m height and between 4m to 20m, slope to be protected with Earth anchors, Helical Pins and Turf reinforced mat. The technical specification and item description for Earth anchors, Helical Pins and Turf reinforced mat are given below.

- Providing Flexible Earth Percussion Anchor with three part system consisting of Anchor head with material composition of Zinc-Aluminium Alloy ZA-3, Load bearing plate material composition of Die Cast Zinc-Aluminium Alloy ZA-2 ; Utilizing a Ceramic Roller & Directional Locking Device connected by wire rope tendon which is Zinc Aluminium Coated and a ferrule, Diameter of wire rope tendon ranges from 3mm, 4mm or 6mm . The Anchor assembly Ultimate Strength varies between a minimum of 500kg to a maximum of 1270Kg. The anchor drive depth varies between 0.5m to 2m. Anchor performance is a function of in situ soil strength and therefore the load range in this specification should be regarded as a guide only.
- Providing Helical pins to hold the turf reinforcement mat in position and shall be driven for permanent tie down of the surface protection material in locations

specified in the drawings. The pin system shall be made of materials suitable to resist corrosion typically Zinc + Aluminium coated and shall conform to BS10270-1. The top coil of the pin system shall be formed for interaction with installation tools. The pin shall have a minimum drive depth of 0.2m and maximum drive depth of 0.3m

- Providing machine made mat of 100% Coconut fibre matrix incorporated into permanent three-dimensional turf reinforcement matting. The matrix is evenly distributed across entire width of mat and stitch bonded between ultra-heavy duty UV stabilised netting with thickness of mat as 18.54mm with heavy duty Helical pins to keep the erosion control mats in position and in close contact with underlying slope with a minimum drive depth of 200mm and maximum drive depth of 300mm, specifically designed for tougher soils and superior performance

The minimum quantity of protection works may be taken as below

Sl no.	Description of item	Side	Unit	Quantity
1	Slope Stabilization with Earth anchors, Helical Pins and Turf reinforced mat	LHS	Sqm	37151.47
2	Slope Stabilization work by Earth anchors, Helical Pins and Turf reinforced mat	RHS	Sqm	39157.05

Note: Any variations in the area specified mentioned above shall not constitute a Change of Scope

13. CHANGE OF SCOPE

The length of Viaducts, Culverts, Retaining Walls, Breast Walls, Bridges etc. specified here in above shall be treated as an approximate assessment. The actual lengths as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule-B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of Article 13.

SCHEDULE - C
(See Clause 2.1)

PROJECT FACILITIES

1 Project Facilities

The Contractor shall construct the Project Facilities in accordance with the provisions of this Agreement. Such Project Facilities shall include:

- (a) Toll plaza;
- (b) Roadside furniture;
- (c) Pedestrian facilities;
- (d) Tree plantation;
- (e) Truck lay-byes;
- (f) Bus stop and shelters;
- (h) Rest areas; and
- (i) Others to be specified

2 Description of Project Facilities

Each of the Project Facilities is described below showing:

(a) Toll Plaza

Toll plaza shall be designed as per the guidelines of manual and it is provided at following locations:

Sl. No.	Toll Plaza Location (Design Chainage in Km)
	Nil

(b) Roadside Furniture

The roadside furniture shall include the provision of the;

i. Traffic Signs

Typical drawings of Traffic signs include roadside signs, overhead signs and curb mounted signs etc provided for the entire Project Highway is given and location of the same shall be as per IRC 67 recommended in Schedule D.

ii. Pavement Markings

Pavement markings shall cover road marking for the entire Project Highway as per manual recommended in Schedule D.

iii. LED Traffic Blinkers

LED traffic blinker signal provided for entire project.

iv. Crash barrier

Provide W-beam crash barrier along the project highway at the locations as suggested in manual recommended in Schedule D.

v. Delineators

Delineators for the entire Project Highway at the locations as suggested in relevant IRC Manual recommended in Schedule D.

vi. Boundary stones

For the entire Project Highway as suggested in relevant IRC Manual recommended in Schedule D.

vii. Hectometer / Kilometer stones

For the entire Project Highway as suggested in relevant IRC Manual recommended in Schedule D.

(c) Pedestrian Facilities

The pedestrian facilities shall include the provision of the;

- i. Pedestrian guardrail: Provide pedestrian guardrail at each bus stop location.
- ii. Pedestrian Crossings: Provide pedestrian crossing facilities on locations as recommended in Schedule D.

(d) Landscaping and Tree Plantation

The landscaping and tree plantation shall be provided. The locations for these provisions shall be finalized in consultation with Independent Engineer.

(e) Truck Lay-byes

Truck lay byes shall be provided at the following locations for a capacity of minimum 10 trucks at each location.

Sr. No.	Proposed Ch.
	Nil

(f) Bus Shelter

Bus Shelters shall be provided at locations given below:

Sr. No.	Proposed Chainage	Direction
1.	42+550	LHS
2.	42+850	RHS
3.	45+450	LHS
4.	45+700	RHS

(g) Rest Areas,

Nil.

(h) Others

1. Highway Lighting

Lighting shall be provided at the following locations (Minimum 40 Lux to be maintained):

- (i) Lighting shall be provided at approach to bridges, Built up areas, Toll plaza, Bus shelter, truck Lay-bys, and as per manual recommended in Schedule D.
- (ii) High Mast Lighting shall be provided at all Major Junctions, Toll plaza locations,

2. Highway Patrol

Not applicable

3. Ambulances

Not applicable

4. Cranes

Not applicable

5. Advance Traffic Management System (ATMS)

Not applicable

SCHEDULE - D

(See Clause 2.1)

SPECIFICATIONS AND STANDARDS

1 Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project Highway.

2 Design Standards

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

Manual of Specifications and Standards for Two Lanning of Highways (IRC: SP: 73-2018), referred to herein as the Manual.

IRC-37-2018: Guidelines for the design of flexible pavements

Code for Practice of Road Signs IRC 67:2001.

The Hill Road Manual IRC SP 48 -1998 should be referred.

The NGT Order dated 01.11.2018 should be followed for disposal of muck.

Annex – I
(Schedule-D)

Specifications and Standards for Construction

1 Specifications and Standards

All Materials, works and construction operations shall conform to the Manual of Specifications and Standards for Two-Lanning of Highways (IRC:SP:73-2018), referred to as the Manual, and MORTH Specifications for Road and Bridge Works. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

2 Deviations from the Specifications and Standards


- 1.1** The terms “Concessionaire”, “Independent Engineer” and “Concession Agreement” used in the Manual shall be deemed to be substituted by the terms “Contractor”, “Authority's Engineer” and “Agreement” respectively.
- 1.2** Notwithstanding anything to the contrary contained in Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, the aforesaid Specifications and Standards shall be deemed to be amended to the extent as set forth below:-

Clause Referred in Manual	Item	Provision as per Manual	Modified Provision	Remarks
2.16	Typical Cross Section	10.0 m Paved and 1.0m Earthen Shoulder	As specified in Schedule B	-
2.2.1	Minimum design speed in hilly terrain.	40 kmph	At some locations , where the horizontal curve radius is not meeting the criteria as per clause 2.9.4 and table 2.5 of IRC:SP:73-2018.	Speed is restricted for Curve having radius less 50m.

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Applicable Typical Cross Section:


TCS-I

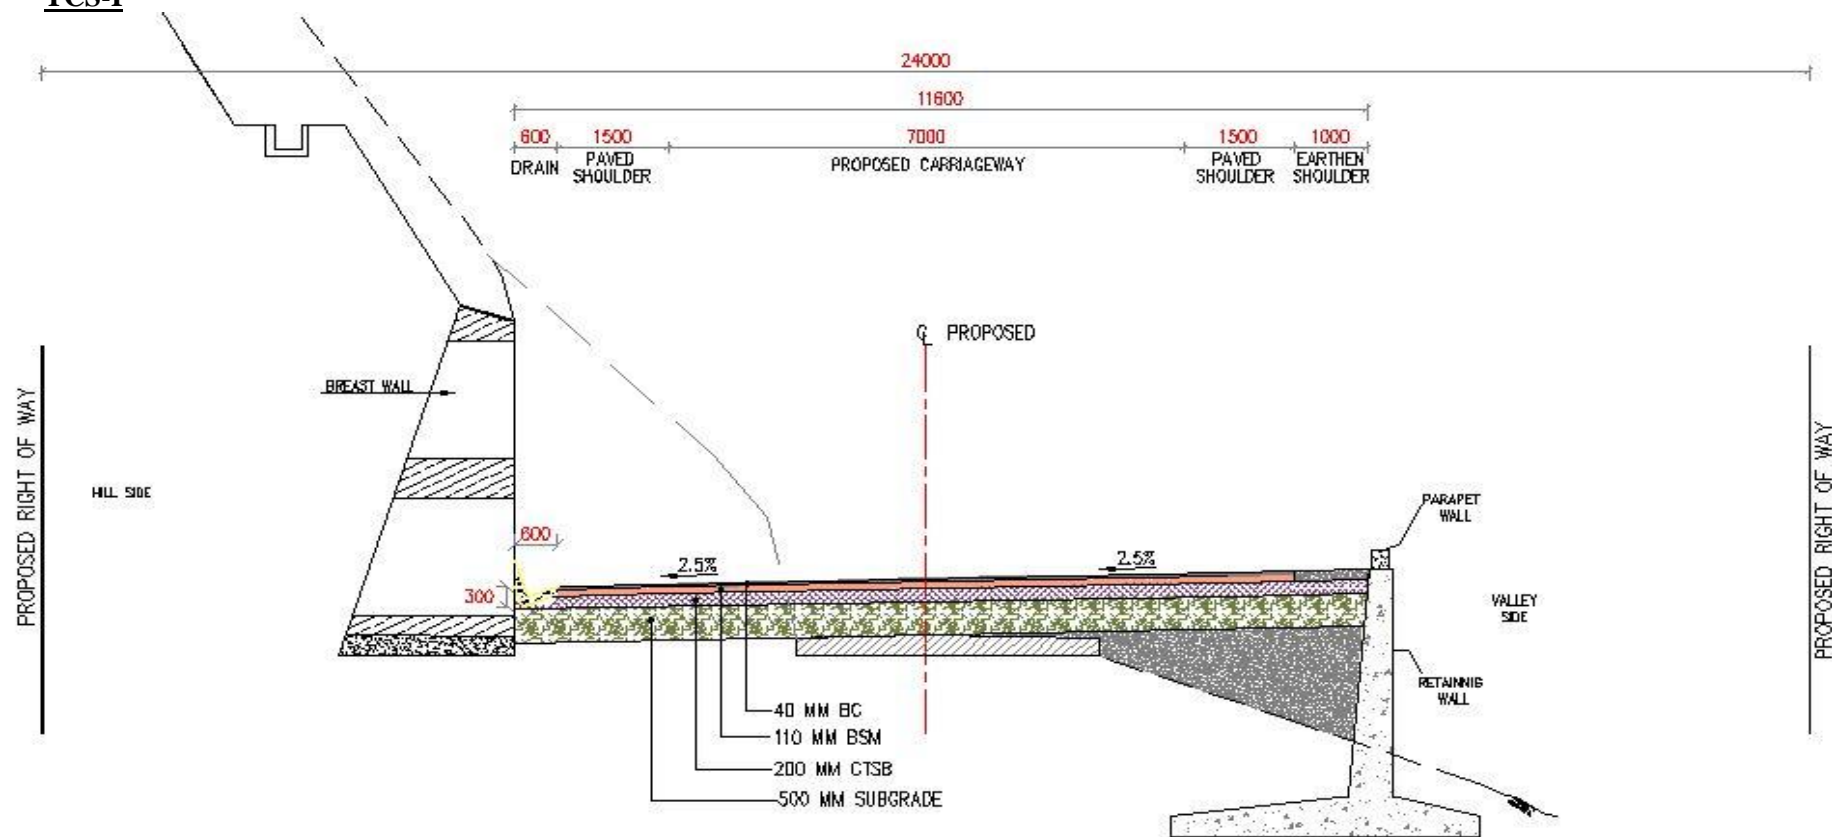

TCS-I
Two Lane With Paved Shoulder Concentric Widening (One Side Hill One Side Valley Section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS-II

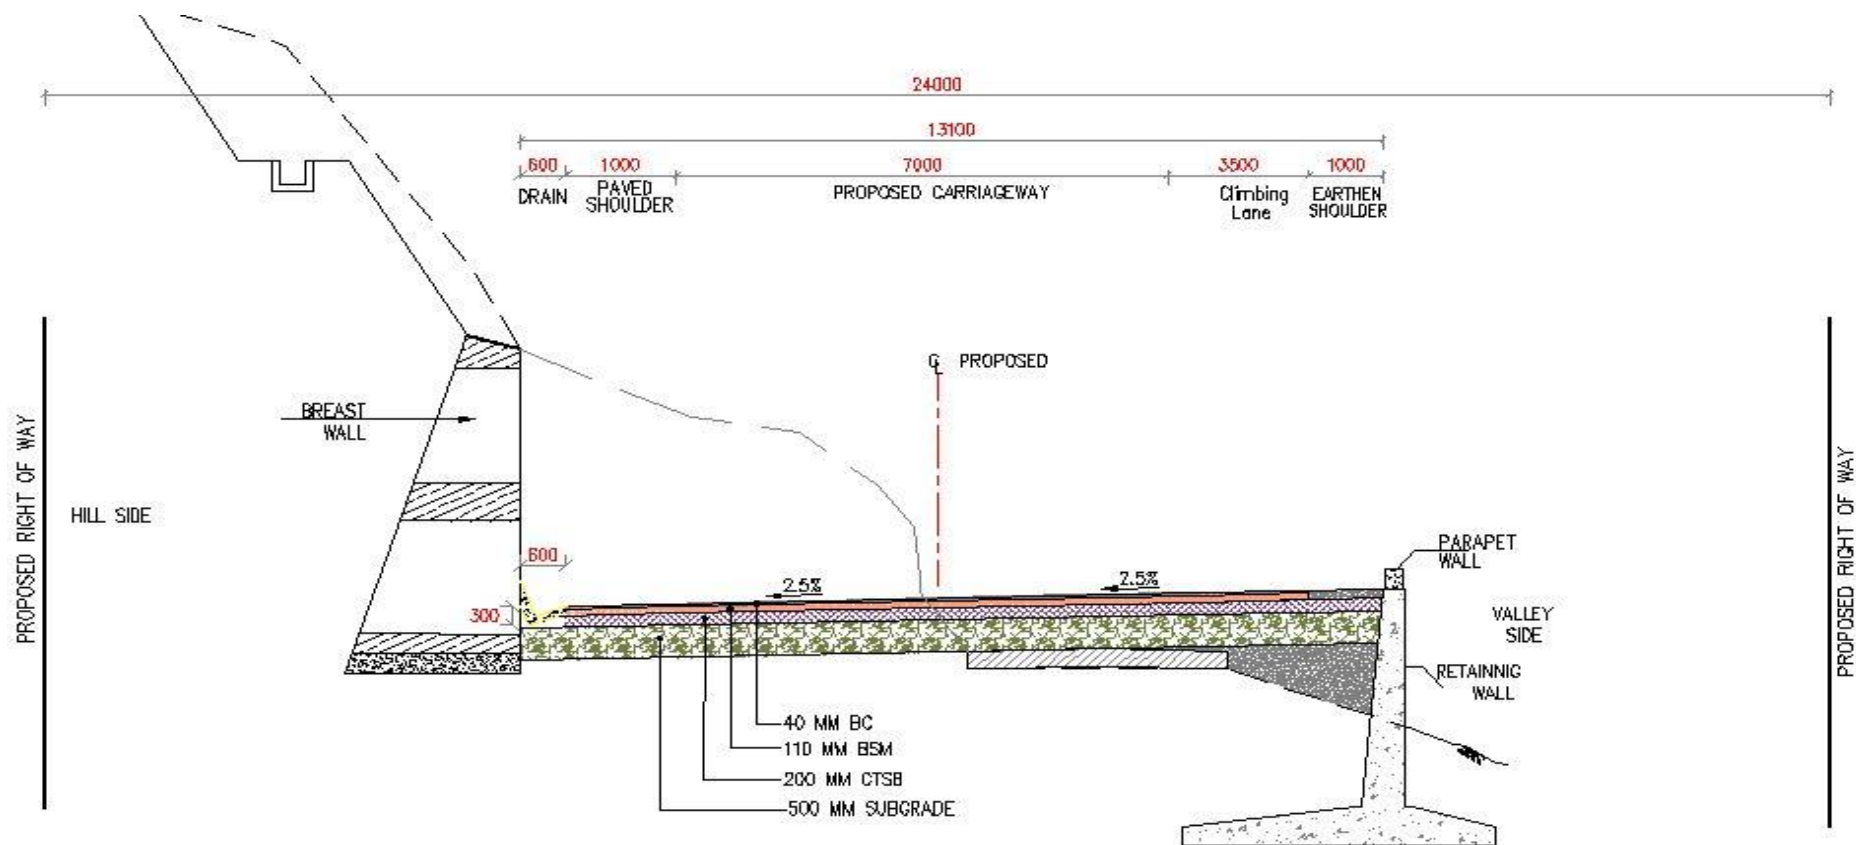


TCS-II

Two Lane including Climbing Lane With one side Paved Shoulder Eccentric Left Side Widening (One Side Hill One Side Valley Section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS-III

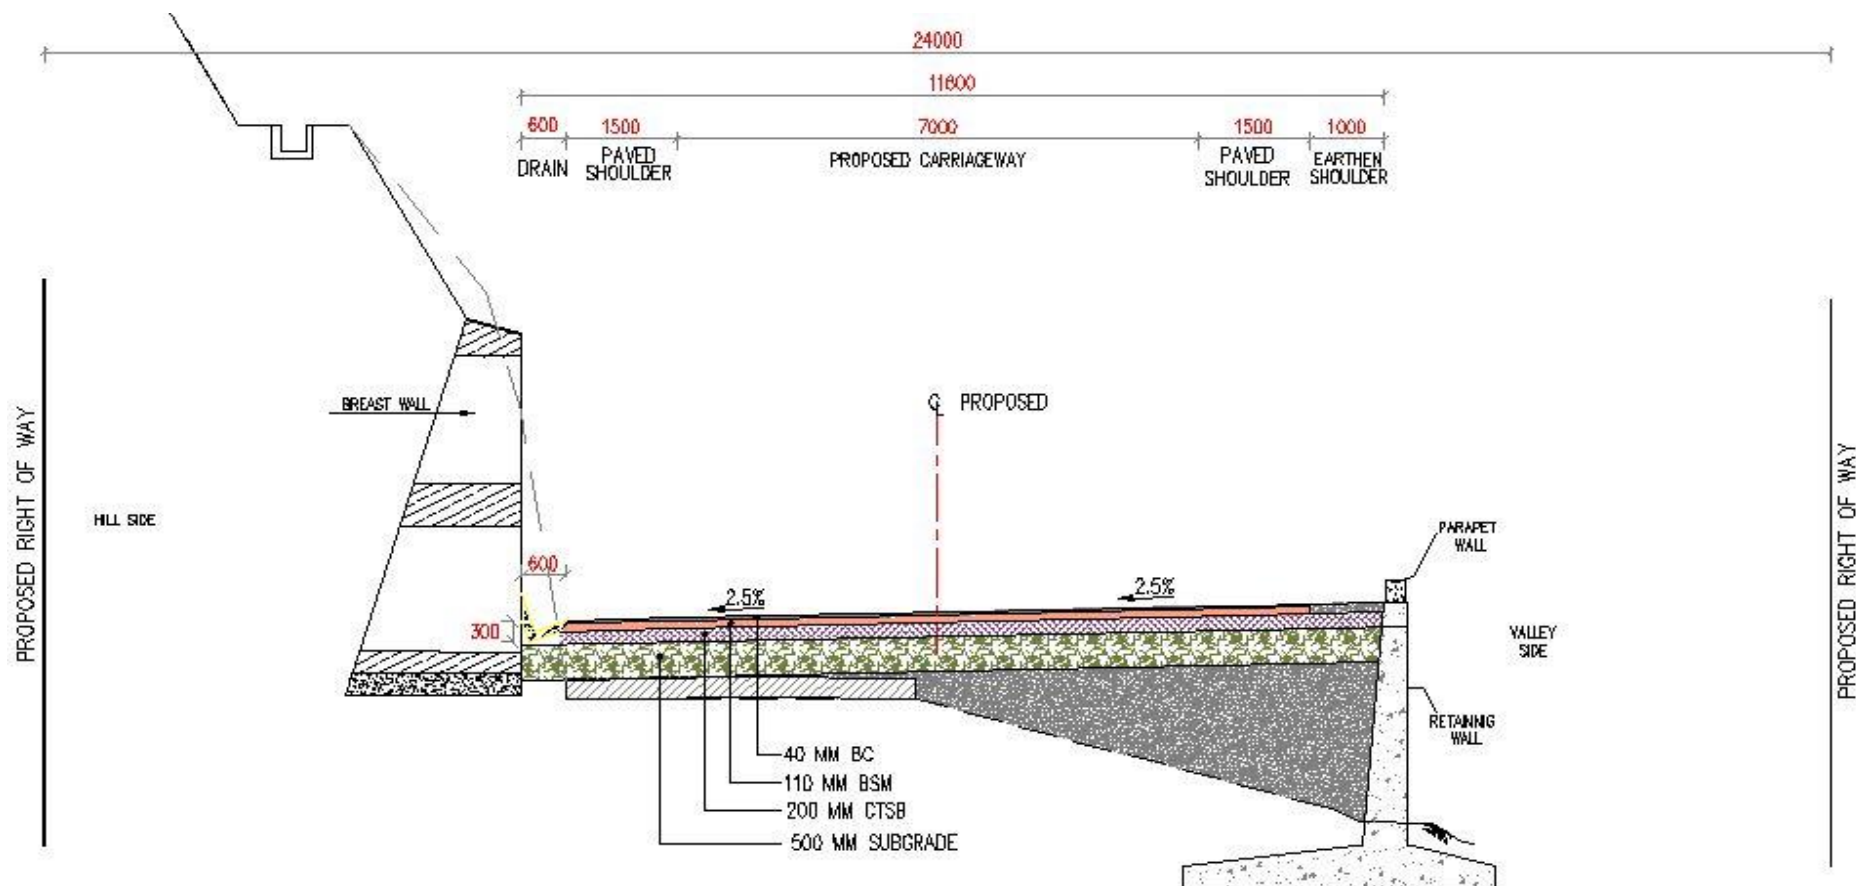


TCS-III

Two Lane With Paved Should Eccentric Right Widening (One Side Hill One Side Valley Section)


Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS-IV

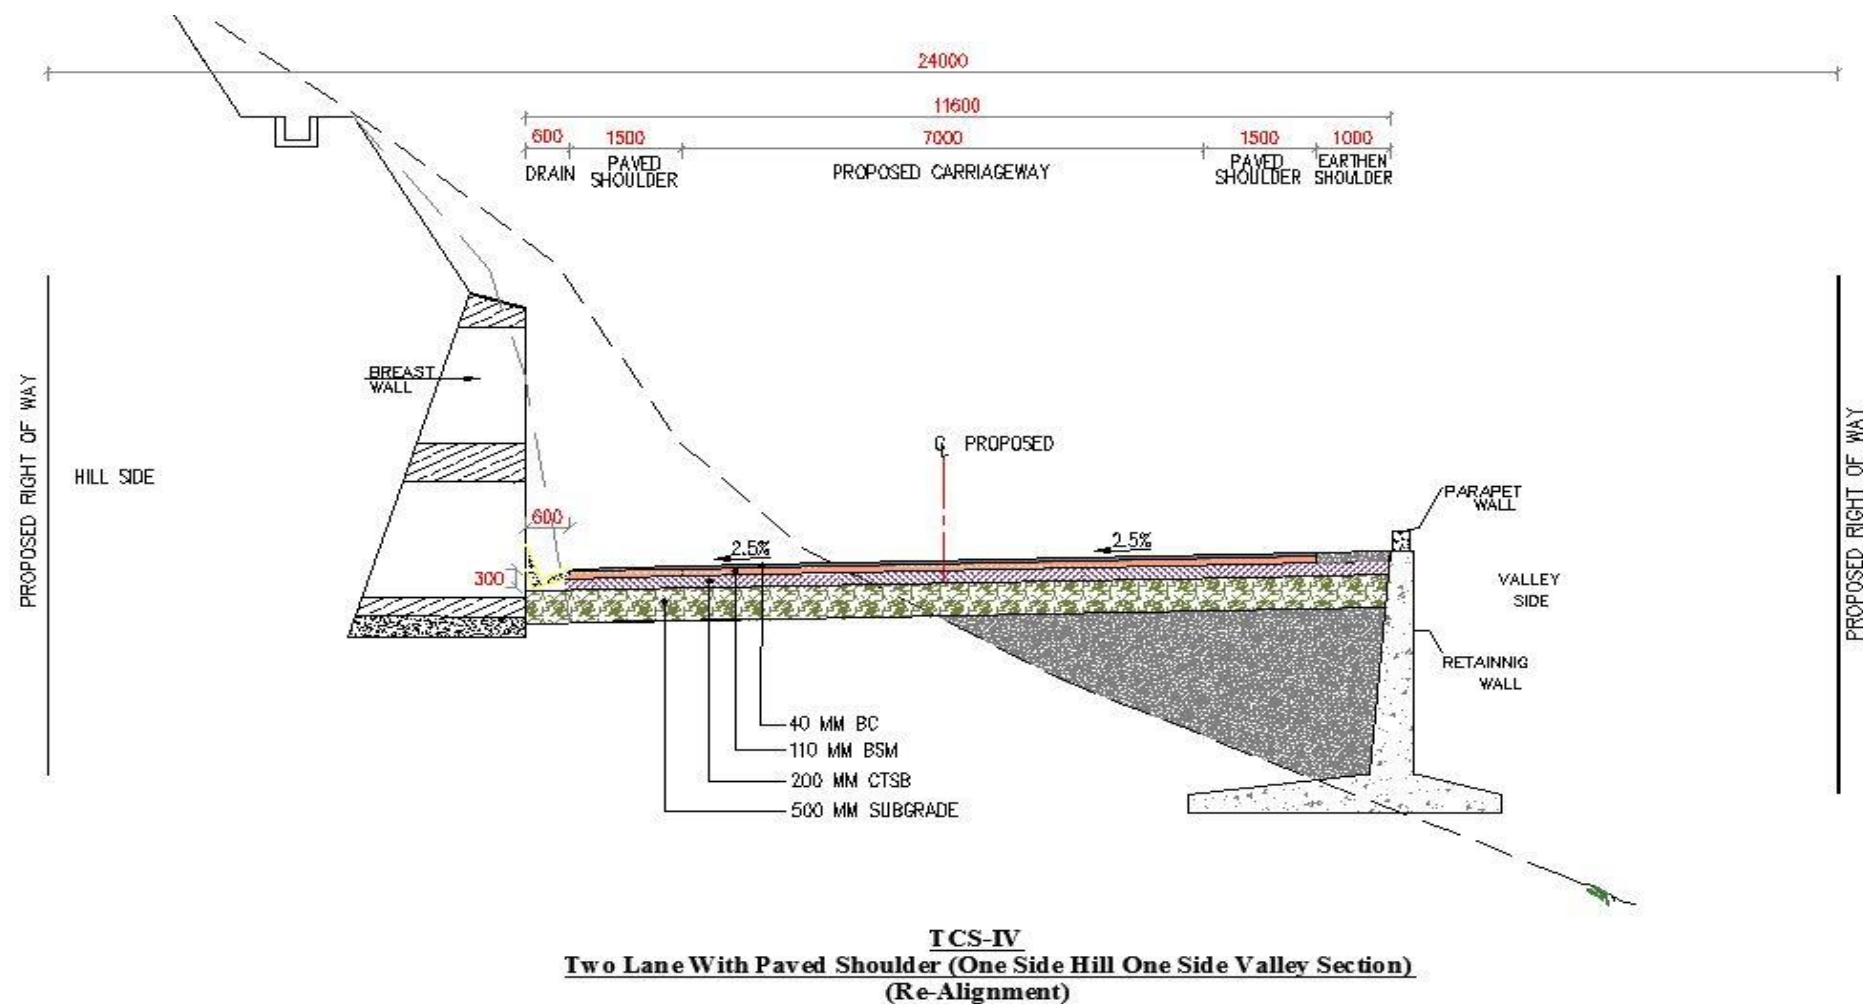

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim


TCS-IV A

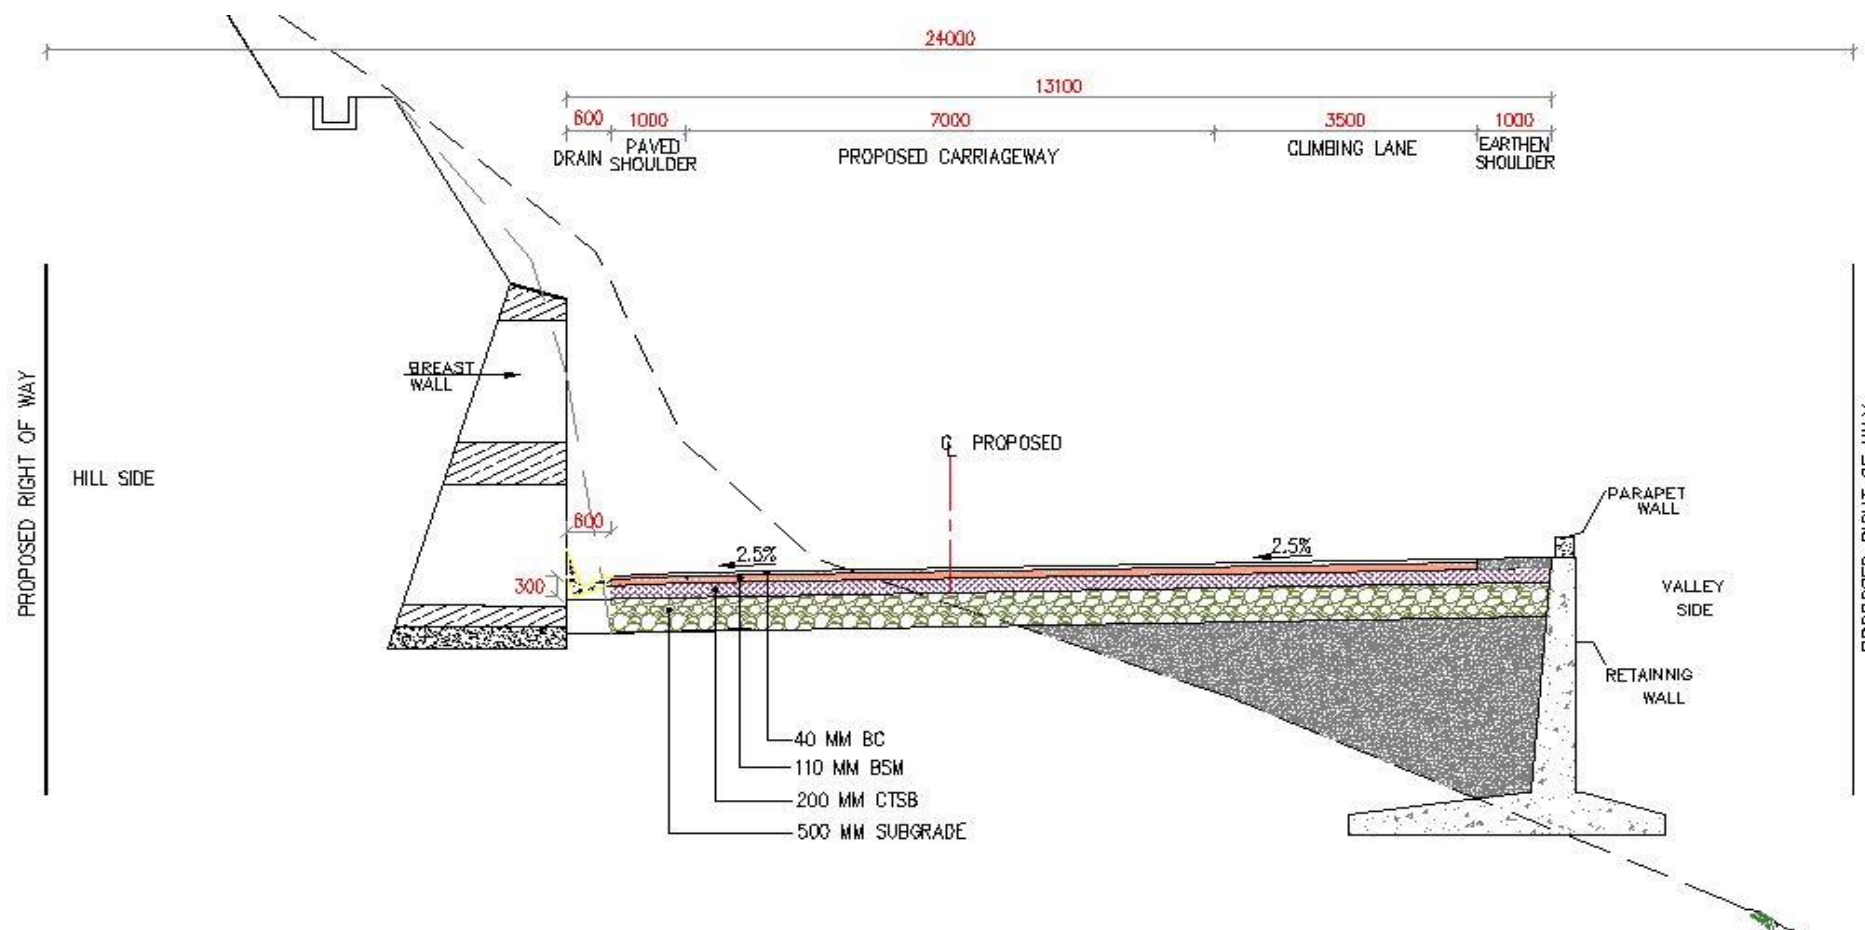

TCS-IVA
Two lane including climbing lane with one side Paved shoulder Realignment
(One Side Hill, One side Valley section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim


TCS-V

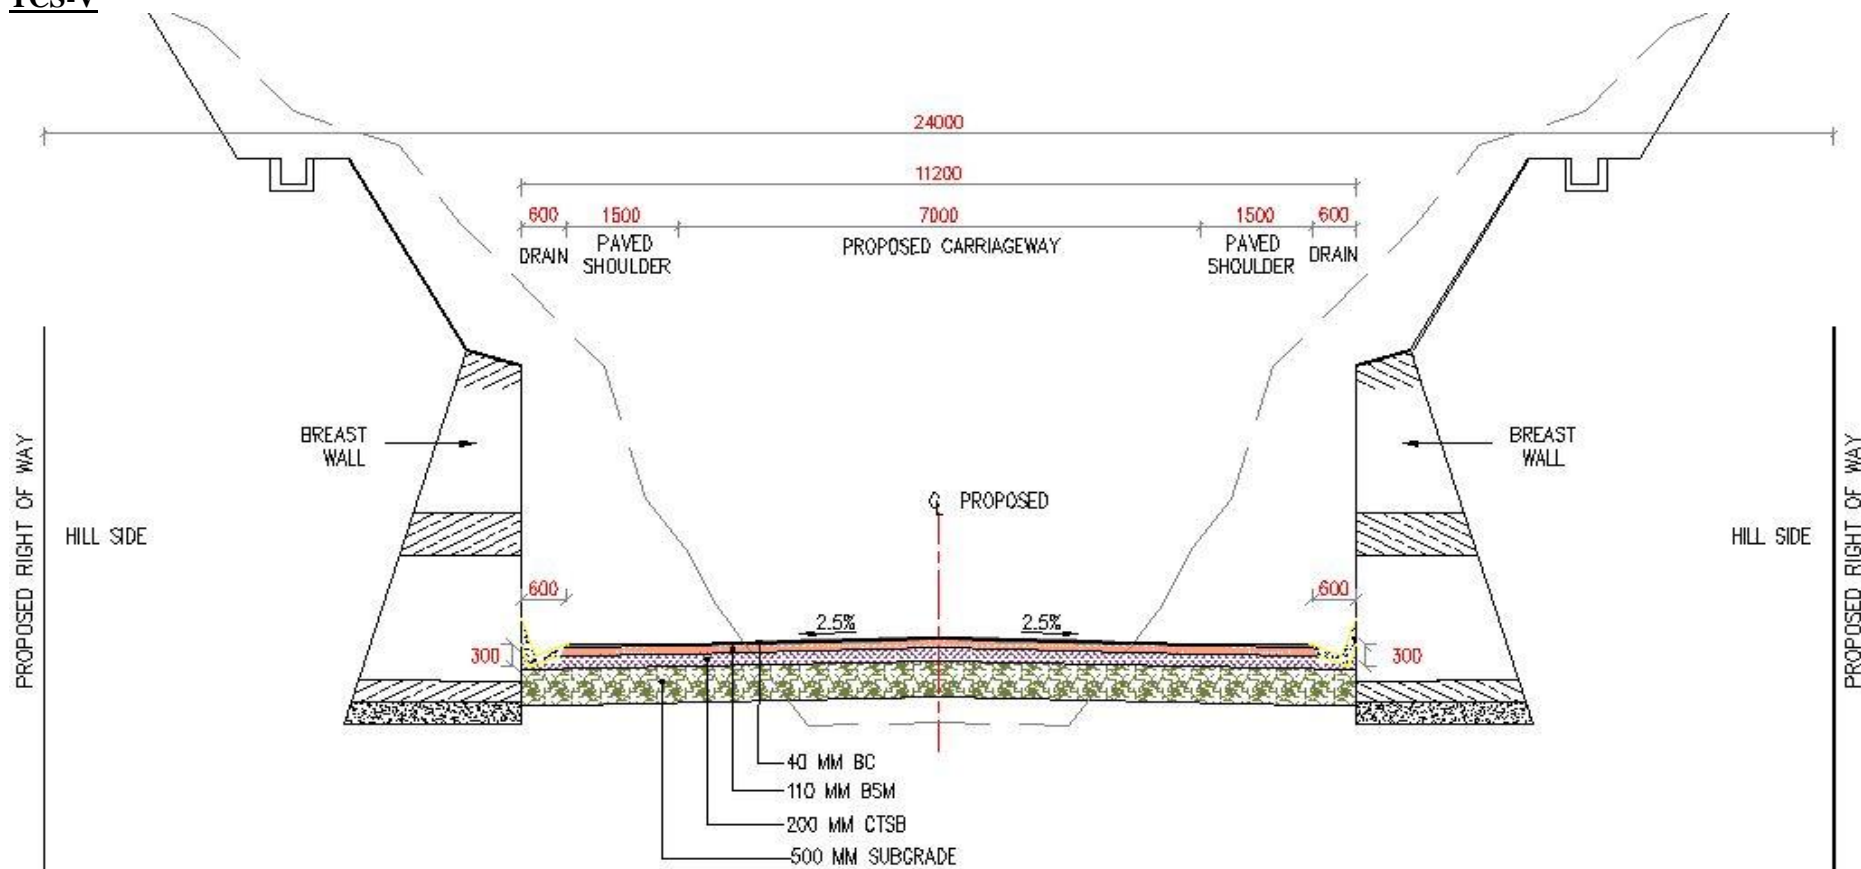

TCS-V
Two Lane With Paved Shoulder Concentric Widening (Both Side Hill Section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim


TCS V A

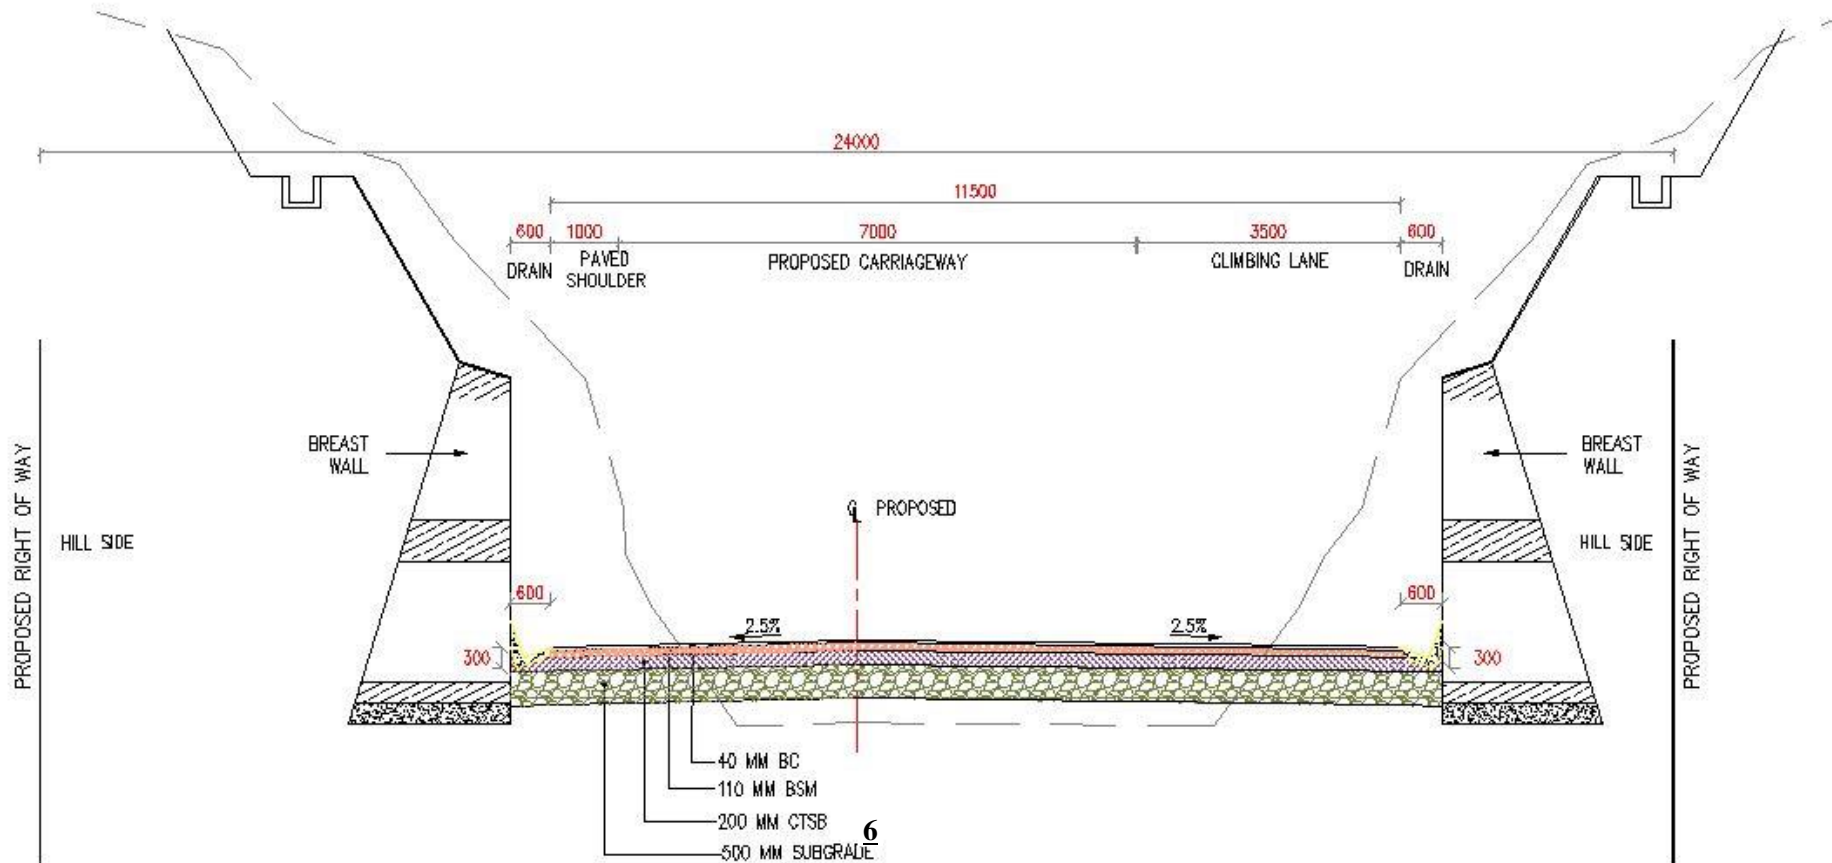

TCS-VA
Two lane including climbing lane with one side Paved shoulder Concentric Widening
(Both Side Hill)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim


TCS VI

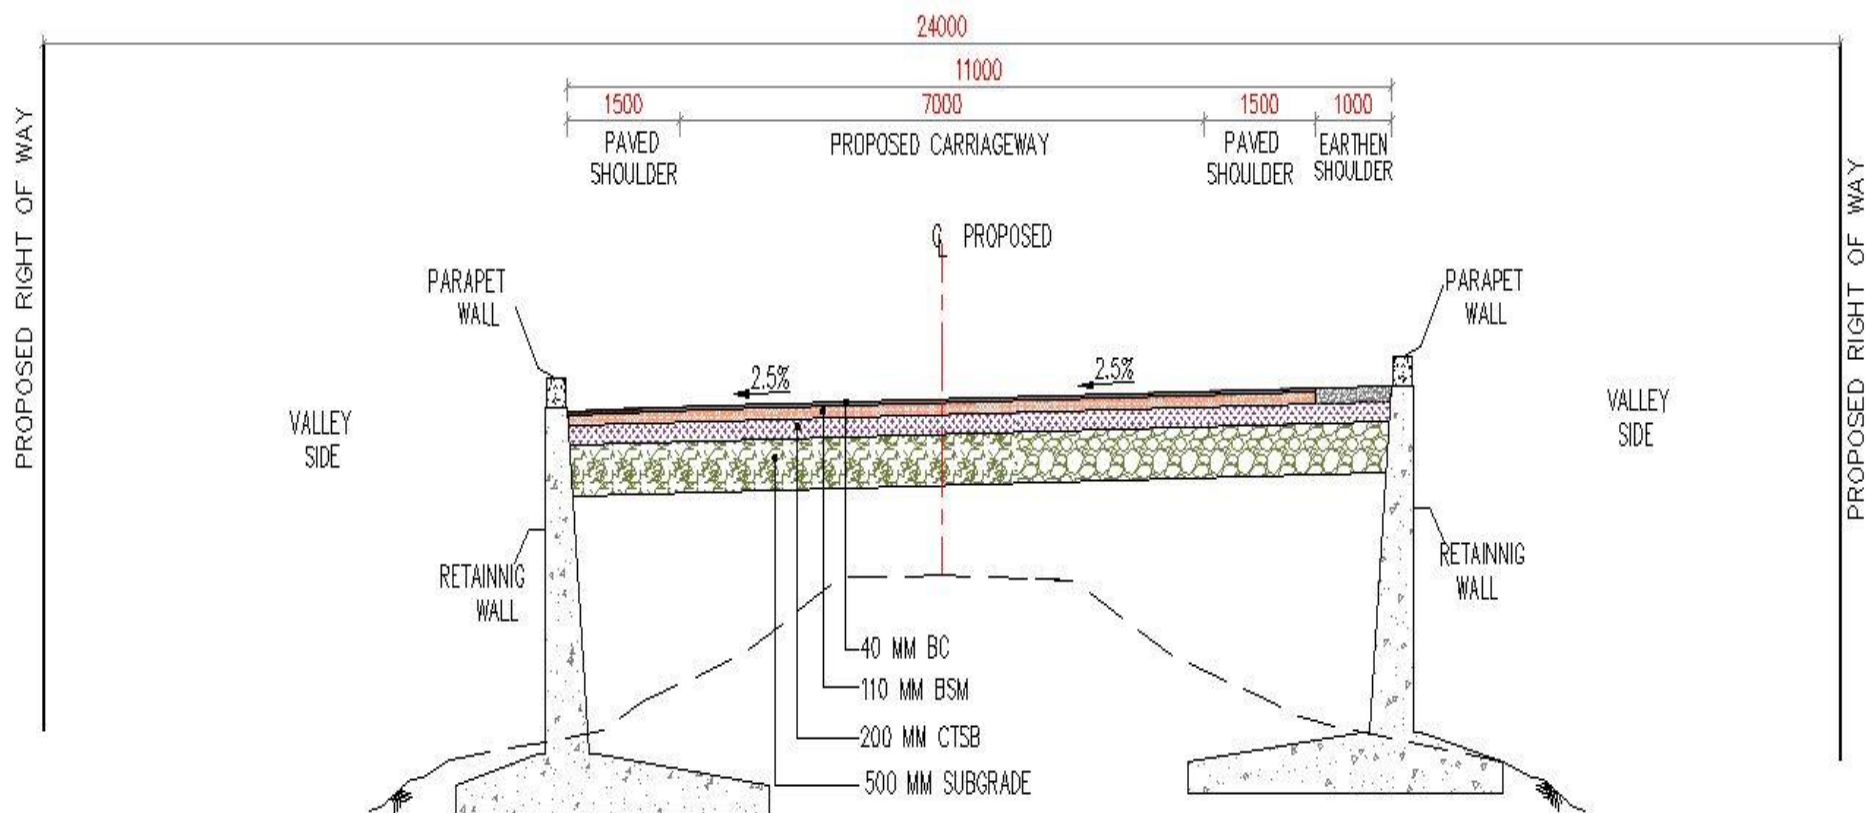

TCS-VI
Two Lane With Paved Shoulder Concentric Widening (Both Side Valley Section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS VIA

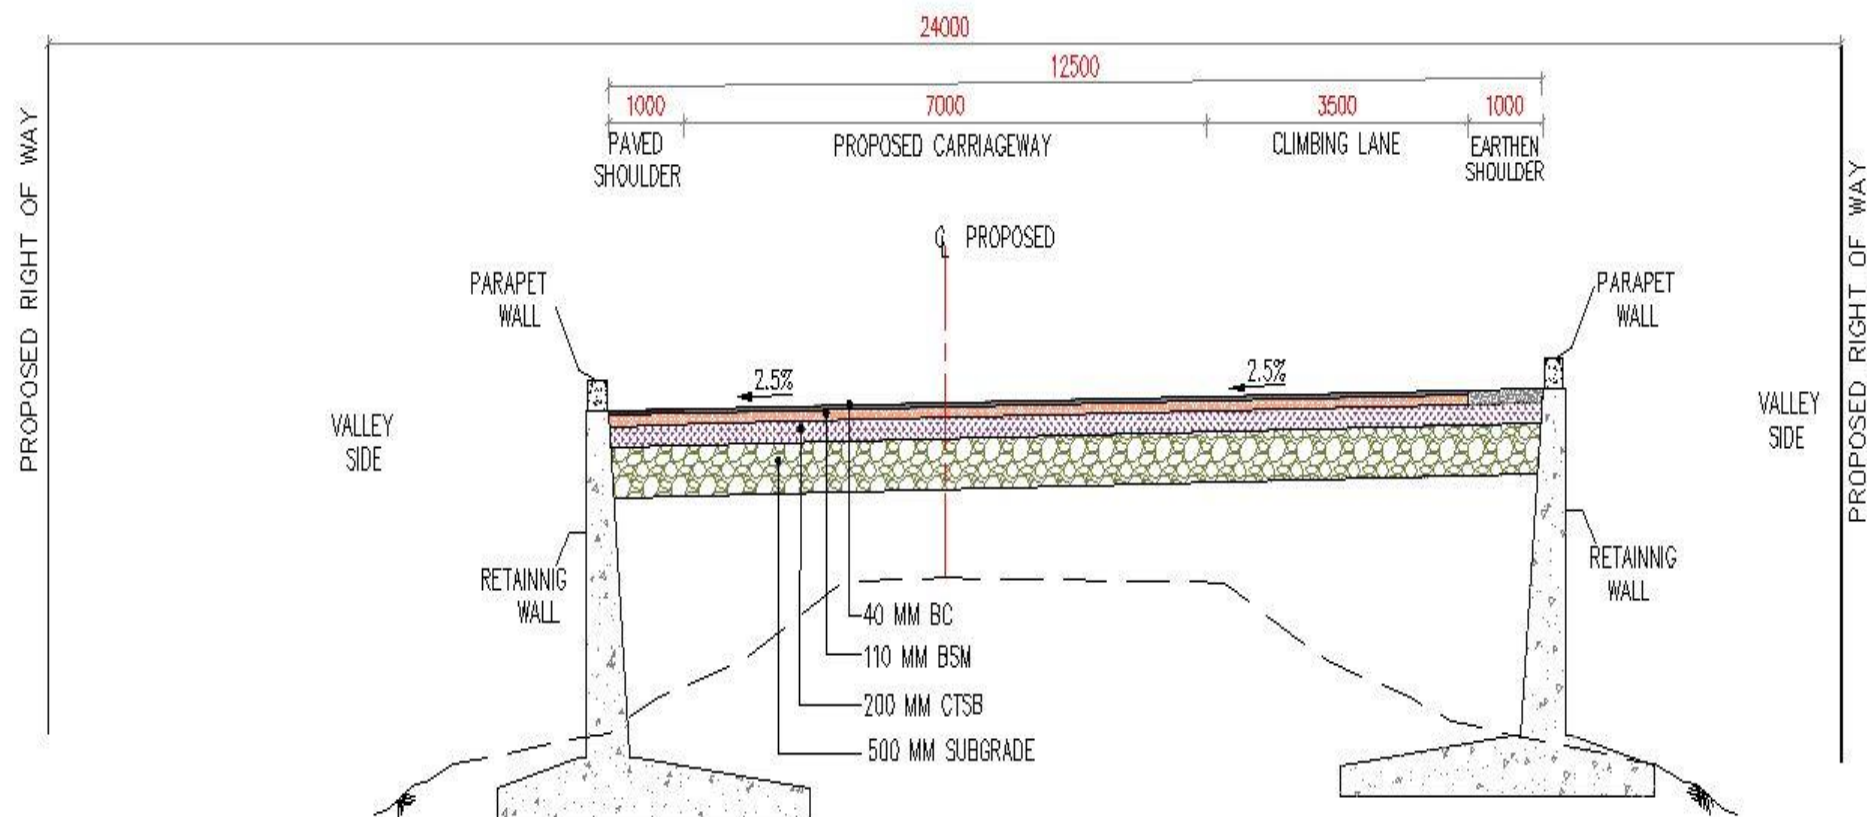


TCS-VIA

**Two lane including climbing lane with one side Paved shoulder Concentric
(Both Side Valley section)**

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim


TCS VII

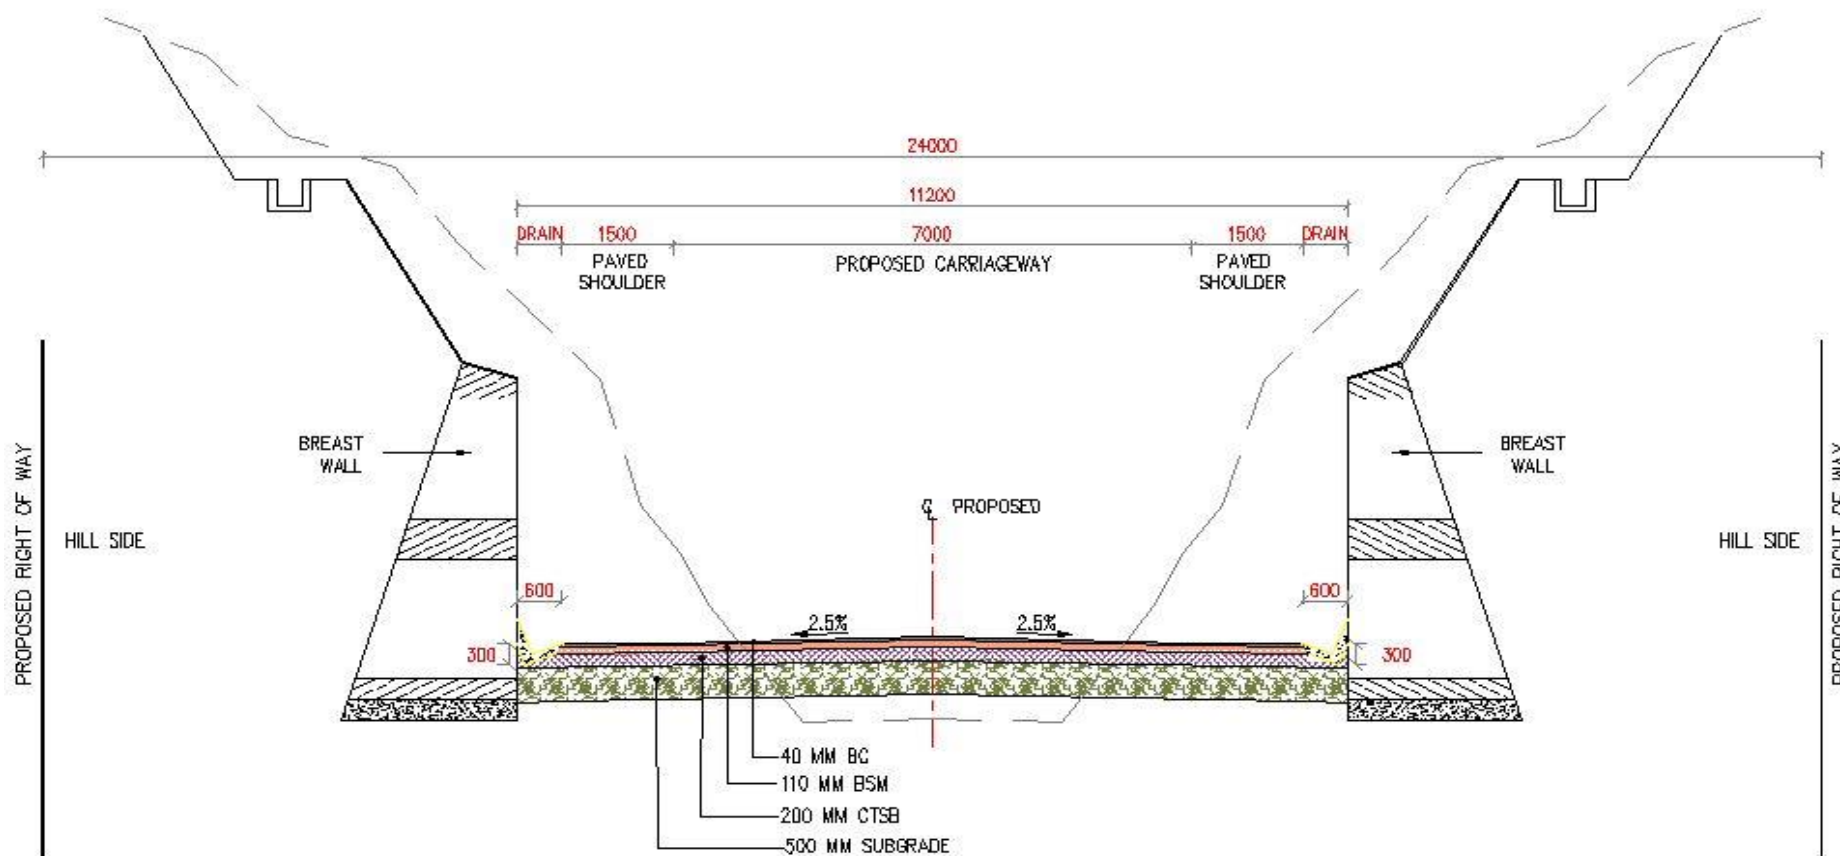

TCS-VII
Two Lane With Paved Shoulder Realignment (Both Side Hill Section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim


TCS VII A

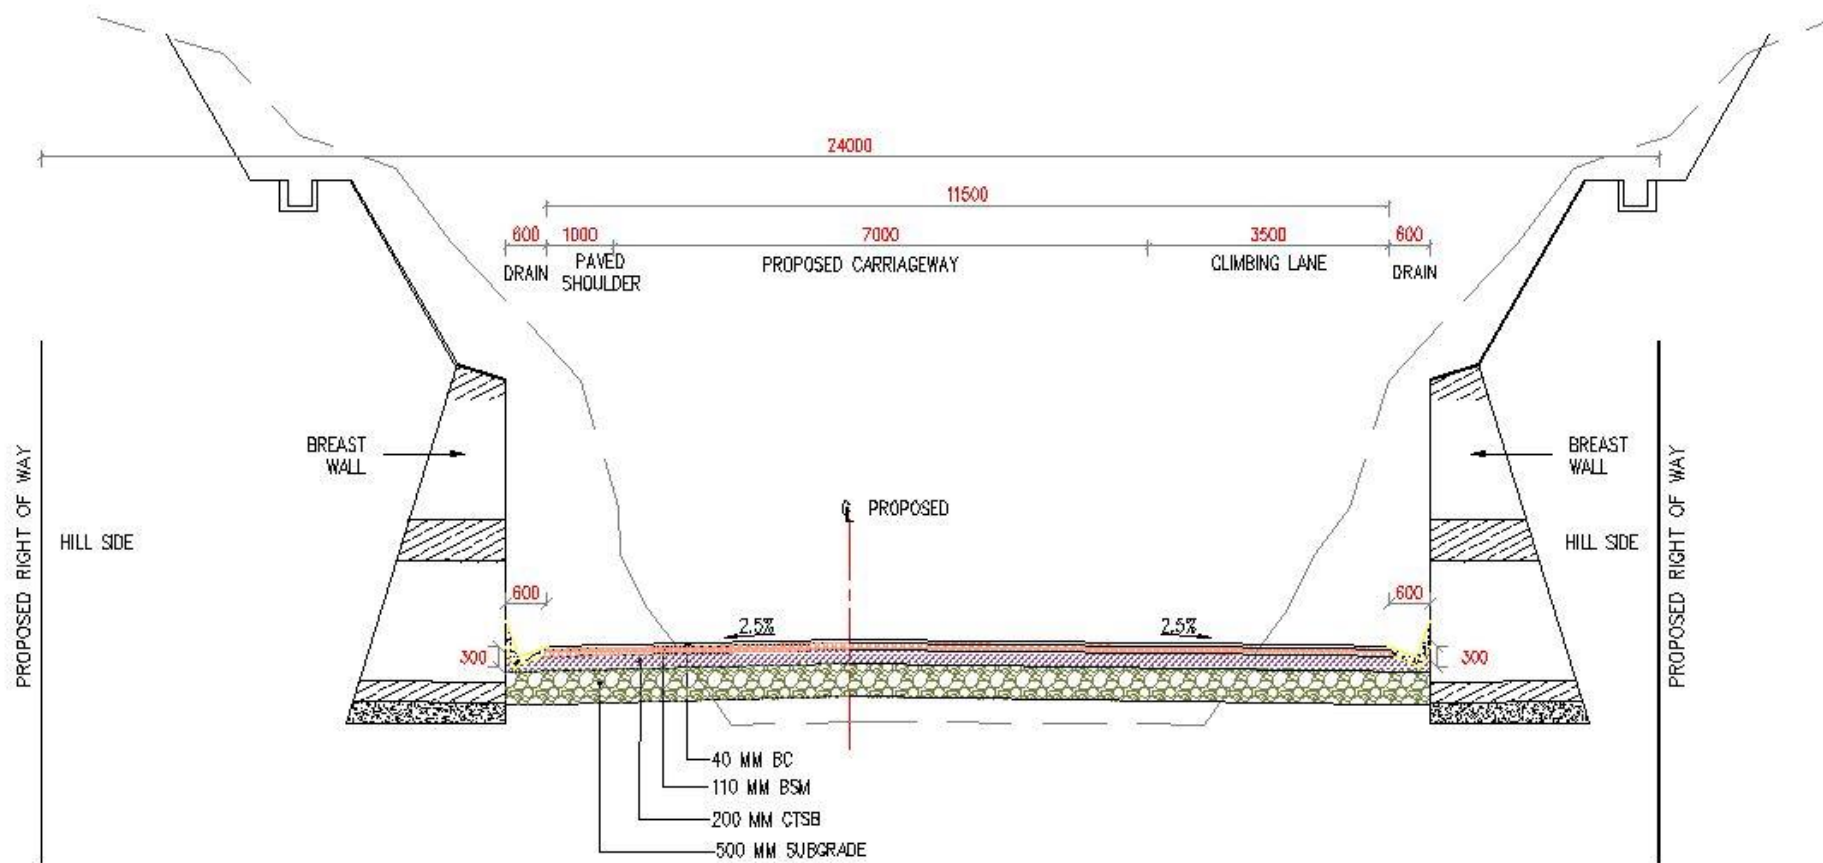

TCS-VIIA
Two lane including climbing lane with one side Paved shoulder Realignment
(Both Side Hill)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim


TCS VIII

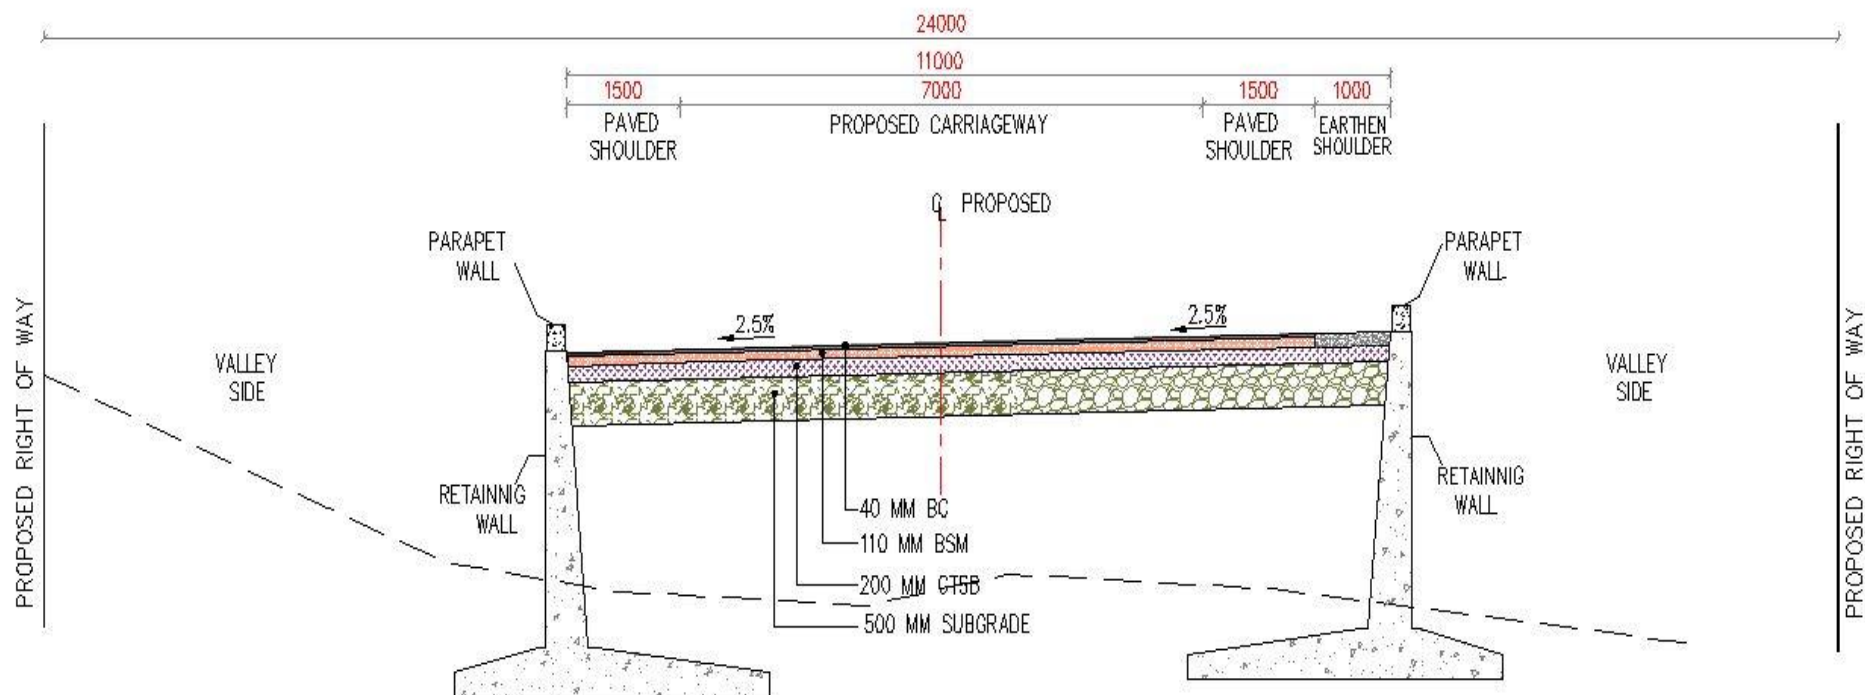

TCS-VIII
Two Lane With Paved Shoulder (Both Side Valley Section)
(Re-Alignment)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS VIII A

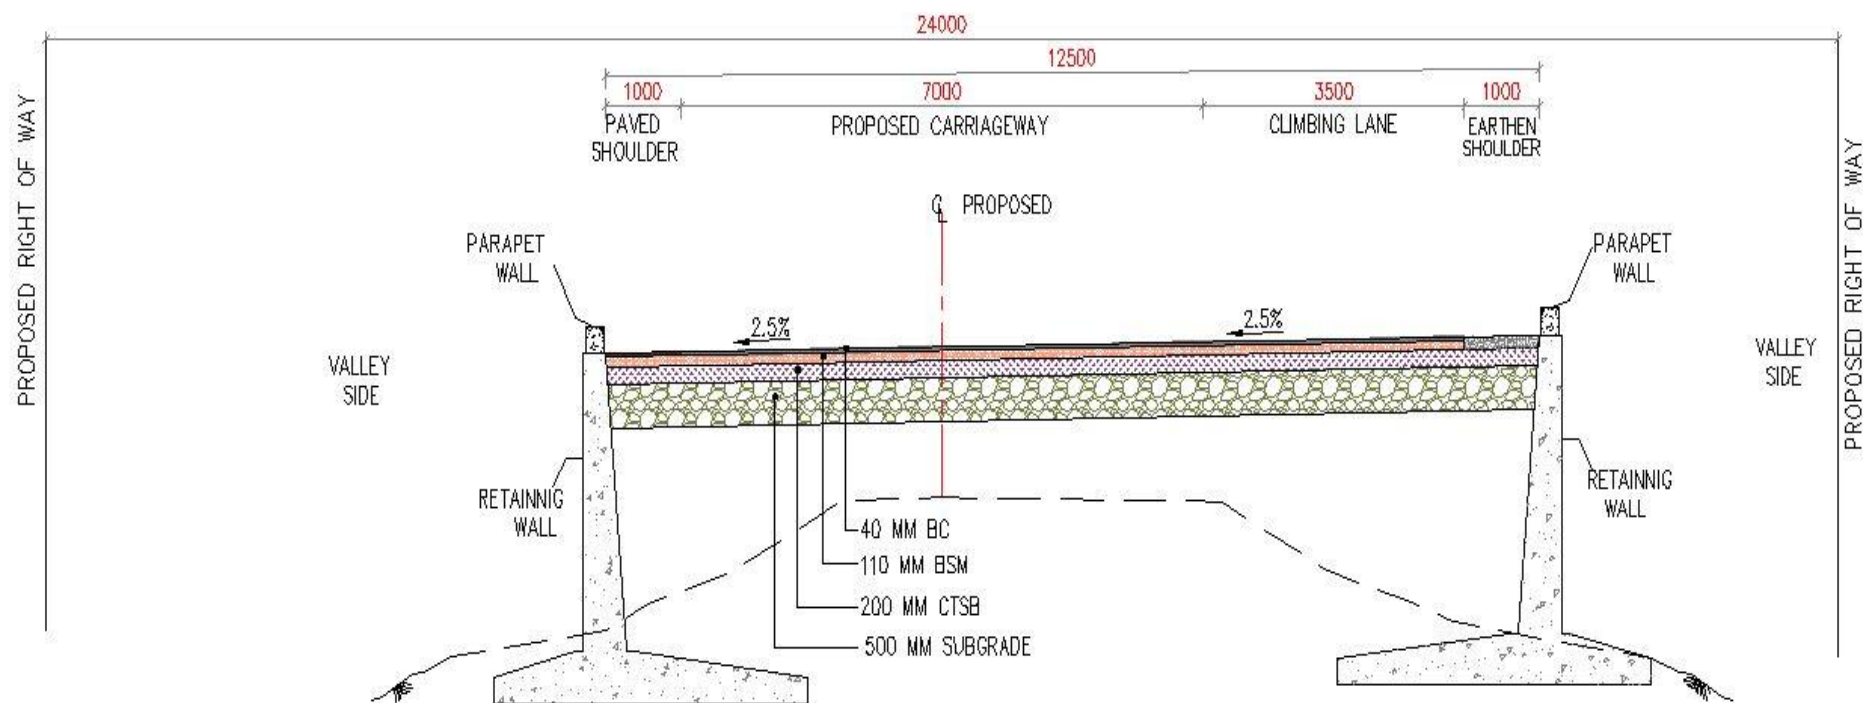

TCS-VIIIA
Two lane including climbing lane with one side Paved shoulder Realignment
(Both Side Valley section)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

TCS-IX
TYPICAL CROSS SECTION FOR ELEVATED STRUCTURE
(Including Box Abutment Length)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim

Schedule - E
(See Clauses 2.1 and 14.2)

Maintenance Requirements

1. Maintenance Requirements

- (i) The Contractor shall, at all times maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- (ii) The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfillment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Termination thereof.
- (iii) All Materials, works and construction operations shall conform to the MORTH Specifications for Road and Bridge Works, and the relevant IRC publications. Where the specifications for a work are not given, Good Industry Practice shall be adopted.

[Specify all the relevant documents]

2. Repair/rectification of Defects and deficiencies

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex -I of this Schedule-E within the time limit set forth therein.

3. Other Defects and deficiencies

In respect of any Defect or deficiency not specified in Annex -I of this Schedule-E, the Authority's Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority's Engineer.

4. Extension of time limit

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Such additional time shall be determined by the Authority's Engineer and conveyed to the Contractor and the Authority with reasons thereof.

5. Emergency repairs/restoration

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage to property, the Contractor shall promptly take all reasonable measures for eliminating or minimizing such danger.

6. Daily inspection by the Contractor

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the

Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at any time during office hours.

7. Pre-monsoon inspection / Post-monsoon inspection

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

8. Repairs on account of natural calamities

All damages occurring to the Project Highway on account of a Force Majeure Event or wilful default or neglect of the Authority shall be undertaken by the Authority at its own cost. The Authority may instruct the Contractor to undertake the repairs at the rates agreed between the Parties.

Annex -I
(Schedule-E)

Annex –I Repair/rectification of Defects and deficiencies

The Contractor shall repair and rectify the Defects and deficiencies specified in this Annex-I of Schedule-E within the time limit set forth in the table below.

Table -1: Maintenance Criteria for Pavements:

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/ Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintenance Specifications	
		Desirable	Acceptable						
Flexible Pavement (Pavement of MCW, Service Road, approaches of Grade structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)	Potholes	Nil	< 0.1 % of area and subject to limit of 10 mm in depth	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC 82: 2015 and Distress Identification Manual for Long Term Pavement Performance Program, FHWA 2003 (http://www.tfhrcc.com/pavement/htp/reports/03031/)	24-48 hours	MORT&H Specification 3004.2	
	Cracking	Nil	< 5 % subject to limit of 0.5 sqm for any 50 m length	Daily			7-15 days	MORT&H Specification 3004.3	
	Rutting	Nil	< 5 mm	Daily	Straight Edge		15 -30 days	MORT&H Specification 3004.2	
	Corrugations and Shoving	Nil	< 0.1 % of area	Daily	Length Measurement Unit like Scale, Tape, odometer etc.		2-7 days	IRC:82-2015	
	Bleeding	Nil	< 1 % of area	Daily			3-7 days	MORT&H Specification 3004.4	
	Ravelling/ Stripping	Nil	< 1 % of area	Daily			7-15 days	IRC:82-2015 read with IRC SP 81	
	Edge Deformation/ Breaking	Nil	< 1 m for any 100 m section and width < 0.1 m at any location, restricted to 30 cm from the edge	Daily			7- 15 days	IRC:82-2015	
	Roughness BI	2000 mm/km	2400 mm/km	Bi-Annually	Class I Profilometer SCRIM (Sideway-force Coefficient Routine		Class I Profilometer : ASTM E950 (98) :2004 –Standard Test Method for measuring Longitudinal Profile of Travelled Surfaces with Accelerometer Established	180 days	IRC:82-2015
	Skid Number	60SN	50SN	Bi-Annually				180 days	BS: 7941-1: 2006
	Pavement Condition	3	2.1	Bi-Annually				180 days	IRC:82-2015

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/ Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintenance Specifications
		Desirable	Acceptable					
	Index				Investigation Machine or equivalent)	Inertial Profiling Reference ASTM E1656 -94: 2000-Standard Guide for Classification of Automatic Pavement Condition Survey Equipment		
	Other Pavement Distresses			Bi-Annually			2-7 days	IRC:82-2015
	Deflection/ Remaining Life			Annually	Falling Weight Deflectometer	IRC 115: 2014	180 days	IRC:115-2014
Rigid Pavement (Pavement of MCW, Service Road, Grade structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)	Roughness BI	2200mm/km	2400mm/km	Bi-Annually	Class I Profilometer	ASTM E950 (98) :2004 and ASTM E1656 -94: 2000	180 days	IRC:SP:83-2008
	Skid	Skid Resistance no. at different speed of vehicles		Bi-Annually	SCRIM (Sideway-force Coefficient Routine Investigation Machine or equivalent)	IRC:SP:83-2008	180 days	IRC:SP:83-2008
		Minimum SN	Traffic Speed (Km/h)					
		36	50					
		33	65					
		32	80					
		31	95					
31	110							
Embankment/ Slope	Edge drop at shoulders	Nil	40mm	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC	7-15 days	MORT&H Specification 408.4
	Slope of camber/cross fall	Nil	<2% variation in prescribed slope of camber /cross fall	Daily			7-15 days	MORT&H Specification 408.4
	Embankment Slopes	Nil	<15 % variation in prescribe side slope	Daily			7-15 days	MORT&H Specification 408.4

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/ Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintenance Specifications
		Desirable	Acceptable					
	Embankment Protection	Nil	Nil	Daily	NA		7-15 days	MORT&H Specification
	Rain Cuts/ Gullies in slope	Nil	Nil	Daily Specially During Rainy Season	NA		7-15 days	MORT&H Specification

In addition to the above performance criterion, the contractor shall strictly maintain the rigid pavements as per requirements in the following table

Table -2: **Maintenance Criteria for Rigid Pavements:**

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
CRACKING						
1	Single Discrete Cracks Not intersecting with any joint	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	Not applicable
			1	w < 0.2 mm. hair cracks		
			2	w = 0.2 - 0.5 mm, discernible from slow-moving car	Seal without delay	Seal, and stitch if L > 1m. Within 7days
			3	w = 0.5 - 1.5 mm, discernible from fast-moving car		
			4	w = 1.5 - 3.0 mm	Seal, and stitch if L > 1 m. Within 7 days	Staple or Dowel Bar Retrofit, FDR for affected portion. Within 15days
			5	w > 3 mm.		
2	Single Transverse (or Diagonal) Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	
			1	w < 0.2 mm, hair cracks	Route and seal with epoxy. Within 7 days	Staple or Dowel Bar Retrofit. Within 15days
			2	w = 0.2 - 0.5 mm, discernible from slow vehicle		
			3	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route, seal and stitch, if L > 1 m. Within 7 days	

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
			4	w = 3.0 - 6.0 mm	Dowel Bar Retrofit. Within 15 days	Full Depth Repair Dismantle and reconstruct affected.
			5	w > 6 mm, usually associated with spalling, and/or slab rocking under traffic	Not Applicable, as it may be full depth	Portion with norms and specifications - See Para 5.5 & 9.2 Within 15days
3	Single Longitudinal Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	
			1	w < 0.5 mm, discernible from slow moving vehicle	Seal with epoxy, if L > 1 m. Within 7 days	Staple or dowel bar retrofit. Within 15days
			2	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route seal and stitch, if L > 1 m. Within 15 days	-
			3	w = 3.0 - 6.0 mm	Staple, if L > 1 m. Within 15 days	Partial Depth Repair with stapling. Within 15 days
			4	w = 6.0 - 12.0 mm, usually associated with spalling	Not Applicable, as it may be full depth	Full Depth Repair Dismantle and reconstruct affected portion as per norms and specifications - See Para 5.6.4 Within 15 days
			5	w > 12 mm, usually associated with spalling, and/or slab rocking under traffic		
4	Multiple Cracks intersecting with one or more joints	w = width of crack	0	Nil, not discernible	No Action	-
			1	w < 0.2 mm, hair cracks	Seal, and stitch if L > 1 m. Within 15 days	
			2	w = 0.2 - 0.5 mm. discernible from slow vehicle		
			3	w = 0.5 - 3.0 mm, discernible from fast vehicle	Full depth repair within 15 days	Dismantle, Reinstall sub-base, Reconstruct whole slab as per specifications within 30 days
			4	w = 3.0 - 6.0 mm panel broken into 2 or 3 pieces		
			5	w > 6 mm and/or panel broken into more		

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
				than 4 pieces		
5	Corner Break	w = width of crack L = length of crack	0	Nil, not discernible	No Action	-
			1	w < 0.5 mm; only 1 corner broken	Seal with low viscosity epoxy to secure broken parts Within 7 days	Seal with epoxy seal with epoxy Within 7days
			2	w < 1.5 mm; L < 0.6 m, only one corner broken	Partial Depth (Refer Figure 8.3 of IRC:SP: 83-2008) Within 15 days	Full depth repair Reinstate sub-base, and reconstruct the slab as per norms and specifications within 30days
			3	w < 1.5 mm; L < 0.6 m, two corners broken		
			4	w > 1.5 mm; L > 0.6 m or three corners broken		
			5	three or four corners broken		
6	Punchout (Applicable to Continuous Reinforced Concrete Pavement (CRCP) only)	w = width of crack L = length (m/m ²)	0	Nil, not discernible		No Action
			1	w < 0.5 mm; L < 3 m/m ²	Not Applicable, as it may be full depth	Seal with low viscosity epoxy to secure broken parts. Within 15days Full depth repair - Cut out and replace damaged area taking care not to damage reinforcement. Within 30days
			2	either w > 0.5 mm or L < 3 m/m ²		
			3	w > 1.5 mm and L < 3 m/m ²		
			4	w > 3 mm, L < 3 m/m ² and deformation		
			5	w > 3 mm, L > 3 m/m ² and deformation		
Surface Defects						
7	Ravelling or Honeycomb type surface	r = area damaged surface/total surface of slab (%) h = maximum depth of damage	0	Nil, not discernible	Short Term No action.	Long Term Not Applicable
			1	r < 2 %	Local repair of areas damaged and liable to be damaged. Within 15 days	
			2	r = 2 - 10 %	Bonded Inlay, 2 or 3 slabs if affecting.	
			3	r = 10-25%		
			4	r = 25 - 50 %		

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case d < D/2	For the case d > D/2
			5	r > 50% and h > 25 mm	Within 30 days	
8	Scaling	r = damaged surface/total surface of slab (%) h = maximum depth of damage	0	Nil, not discernible	Short Term	Long Term
			1	r < 2 %	No action.	Not Applicable
			2	r = 2 - 10 %	Local repair of areas damaged and liable to be damaged. Within 7days	
			3	r = 10 - 20%	Bonded Inlay within 15 days	
			4	r = 20 - 30 %		
			5	r > 30 % and h > 25 mm	Reconstruct slab within 30 days	
			9	Polished Surface/Glazing	t = texture depth, sand patch test	0
1	t > 1 mm					
2 '	t = 1 - 0.6 mm	Monitor rate of deterioration				
3	t = 0.6 - 0.3 mm					
4	t = 0.3 - 0.1 mm					
5	t < 0.1 mm	Diamond Grinding if affecting 50% or more slabs in a continuous stretch of minimum 5 km. Within 30 days				
10	Popout (Small Hole), Pothole Refer Para 8.4	n = number/m ² d = diameter h = maximum depth				0
			1	d = 50 - 100 mm; h < 50 mm; n < 1 per 5 m ²	Partial depth repair 65 mm deep. Within 15 days	
			2	d = 50 - 100 mm; h > 50 mm; n < 1 per 5 m ²		
			3	d = 100 - 300 mm; h < 100 mm n < 1 per 5 m ²	Partial depth repair 110mm i.e.10 mm more than the depth of the hole.	
			4	d = 100 - 300 mm; h > 100 mm; n < 1 per 5 m ²		

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
					Within 30 days	
			5	$d > 300 \text{ mm}; h > 100 \text{ mm}; n > 1 \text{ per } 5 \text{ m}^2$	Full depth repair. Within 30 days	
Joint Defects						
11	Joint Seal Defects	loss or damage $L = \text{Length as \% total joint length}$	0	Difficult to discern.	Short Term No action.	Long Term Not Applicable
			1	Discernible, $L < 25\%$ but of little immediate consequence with regard to ingress of water or trapping incompressible material.	Clean joint, inspect later.	
			3	Notable. $L > 25\%$ insufficient protection against ingress of water and trapping incompressible material.	Clean and reapply sealant in selected locations. Within 7 days	
			5	Severe; $w > 3 \text{ mm}$ negligible protection against ingress of water and trapping incompressible material.	Clean, widen and reseal the joint. Within 7 days	
12	Spalling of Joints	$w = \text{width on either side of the joint}$ $L = \text{length of spalled portion (as \% joint length)}$	0	Nil, not discernible	No action.	Not Applicable
			1	$w < 10 \text{ mm}$	Apply low viscosity epoxy resin/ mortar in cracked portion. Within 7 days	
			2	$w = 10 - 20 \text{ mm}, L < 25\%$	Partial Depth Repair. Within 15 days	
			3	$w = 20 - 40 \text{ mm}, L > 25\%$	30 - 50 mm deep, $h = w + 20\%$ of w , within 30 days	
			4	$w = 40 - 80 \text{ mm}, L > 25\%$	50 - 100 mm deep repair. $H = w + 20\%$ of w . Within 30 days	
			5	$w > 80 \text{ mm}, \text{ and } L > 25\%$		
13	Faulting (or Stepping) in Cracks or Joints	$f = \text{difference of level}$	0	not discernible, $< 1 \text{ mm}$	No action.	No action.
			1	$f < 3 \text{ mm}$		
			2	$f = 3 - 6 \text{ mm}$	Determine cause and observe, take action for	Replace the slab as appropriate.

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case d < D/2	For the case d > D/2
					diamond grinding	Within 30days
			3	f = 6 - 12 mm	Diamond Grinding	
			4	f= 12 - 18 mm	Raise sunken slab.	Replace the slab as appropriate. Within 30days
			5	f> 18 mm	Strengthen subgrade and sub-base by grouting and raising sunken slab	
14	Blowup or Buckling	h = vertical displacement from normal profile	0	Nil, not discernible	Short Term	Long Term
			1	h < 6 mm	No Action	
			2	h = 6 - 12 mm	Install Signs to Warn Traffic within 7 days	
			3	h = 12 - 25 mm		
			4	h > 25 mm	Full Depth Repair. Within 30 days	
			5	shattered slabs, ie 4 or more pieces	Replace broken slabs. Within 30 days	
15	Depression	h = negative vertical displacement from normal profile L =length	0	Not discernible, h < 5 mm	No action.	Not Applicable
			1	h = 5 - 15 mm	Install Signs to Warn Traffic within 7 days	
			2	h = 15-30 mm, Nos <20% joints		
			3	h = 30 - 50 mm	Strengthen sub-grade. Reinstate pavement at normal level if L < 20 m. Within 30 days	
			4	h > 50 mm or > 20% joints		
			5	h > 100 mm		
16	Heave	h = positive vertical displacement from normal profile. L = length	0	Not discernible. h < 5 mm	Short Term	Long Term
					No action.	
			1	h = 5 - 15 mm	Follow up.	
			2	h = 15 - 30 mm, Nos <20% joints	Install Signs to Warn Traffic within 7 days	
			3	h = 30 - 50 mm		

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
					4	$h > 50$ mm or $> 20\%$ joints
5	$h > 100$ mm					
17	Bump	h = vertical displacement from normal profile	0	$h < 4$ mm	No action	Construction Limit for New Construction.
			1	$h = 4 - 7$ mm	Grind, in case of new construction within 7 days	
			3	$h = 7 - 15$ mm	Grind, in case of ongoing Maintenance within 15 days	Replace in case of new construction. Within 30days
			5	$h > 15$ mm	Full Depth Repair. Within 30 days	Full Depth Repair. Within 30days
18	Lane to Shoulder Dropoff	f = difference of level	0	Nil, not discernible < 3 mm	Short Term	Long Term
				No action.		
			1	$f = 3 - 10$ mm	Spot repair of shoulder within 7 days	
			2	$f = 10 - 25$ mm		
			3	$f = 25 - 50$ mm	Fill up shoulder within 7 days	For any 100 m stretch Reconstruct shoulder, if affecting 25% or more of stretch. Within 30days
			4	$f = 50 - 75$ mm		
			5	$f > 75$ mm		
Drainage						
19	Pumping	quantity of fines and water expelled through open joints and cracks Nos	0	not discernible	No Action	Inspect and repair sub-drainage at distressed sections and upstream.
			1 to 2	slight/ occasional Nos $< 10\%$	Repair cracks and joints Without delay.	
			3 to 4	appreciable/ Frequent 10 - 25%	Lift or jack slab within 30 days.	
		Nos/100 m stretch	5	abundant, crack development $> 25\%$	Repair distressed pavement sections. Strengthen subgrade	

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
					and subbase. Replace slab. Within 30 days	
20	Ponding	Ponding on slabs due to blockage of drains	0-2	No discernible problem	No action.	
			3 to 4	Blockages observed in drains, but water flowing	Clean drains etc within 7 days, Follow up	Action required to stop water damaging foundation within 30 days.
			5	Ponding, accumulation of water observed	-do-	

Table -3: Maintenance Criteria for Safety Related Items and Other Furniture Items:

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Highway	Availability of Safe Sight Distance	As per IRC SP: 84-2014, a minimum of safe stopping sight distance shall be available throughout.		Monthly	Manual Measurements with Odometer along with video/ image backup	Removal of obstruction within 24 hours, in case of sight line affected by temporary objects such as trees, temporary encroachments. In case of permanent structure or design deficiency: Removal of obstruction/improvement of deficiency at the earliest Speed Restriction boards and suitable traffic calming measures such as transverse bar marking, blinkers, etc. shall be applied during the period of rectification.		IRC:SP 84-2014
		Design Speed, kmph	Desirable Minimum Sight Distance (m)					
		100	360					
		80	260					
Pavement Marking	Wear	<70% of marking remaining		Bi-Annually	Visual Assessment as per Annexure-F of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect - within 2 months	IRC:35-2015
	Day time Visibility	During expected life Service Time Cement Road - 130mcd/m ² /lux Bituminous Road - 100mcd/m ² /lux		Monthly	As per Annexure-D of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015
	Night Time Visibility	<u>Initial and Minimum Performance for Dry Retro reflectivity during night time:</u>		Bi-Annually	As per Annexure-E of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015
		Design Speed	(RL) Retro Reflectivity (mcd/m ² /lux)					

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)			Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
			Initial (7 days)	Minimum Threshold level (TL) & warranty period required up to 2 years					
		Up to 65	200	80					
		65 - 100	250	120					
		Above 100	350	150					
		<u>Initial and Minimum Performance for Night Visibility under wet condition (Retro reflectivity):</u> Initial 7 days Retro reflectivity: 100 mcd/m ² /lux Minimum Threshold Level: 50 mcd/m ² /lux							
	Skid Resistance	Initial and Minimum performance for Skid Resistance: Initial (7days): 55BPN Min. Threshold: 44BPN *Note: shall be considered under urban/city traffic condition encompassing the locations like pedestrian crossings, bus bay, bus stop, cycle track intersection delineation, transverse bar markings etc			Bi-Annually	As per Annexure-G of IRC:35-2015		Within 24 hours	IRC:35-2015
Road Signs	Shape and Position	Shape and Position as per IRC:67-2012. Signboard should be clearly visible for the design speed of the section.			Daily	Visual with video/image backup	Improvement of shape, in case if shape is damaged.	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and	IRC:67-2012

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
					Relocation as per requirement	Dual post signs) 15 Days in case of Gantry/Cantilever Sign boards	
	Retro reflectivity	As per specifications in IRC:67-2012	Bi-Annually	Testing of each signboard using Retro Reflectivity Measuring Device. In accordance with ASTM D 4956-09.	Change of signboard	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 1 Month in case of Gantry/Cantilever Sign boards	RC:67-2012
Kerb	Kerb Height	As per IRC 86:1983 depending upon type of Kerb	Bi-Annually	Use of distance measuring tape	Raising Kerb Height	Within 1 Month	RC 86:1983
	Kerb Painting	<u>Functionality</u> : Functioning of Kerb painting as intended	Daily	Visual with video/image backup	Kerb Repainting	Within 7-days	RC 35:2015
Other Road Furniture	Reflective Pavement Markers (Road Studs)	Numbers and Functionality as per specifications in IRC:SP:84-2014 and IRC:35-2015, unless specified in Schedule-B.	Daily	Counting	New Installation	Within 2 months	IRC:SP:84-2014, IRC:35-2015
	Pedestrian Guardrail	<u>Functionality</u> : Functioning of guardrail as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:SP:84-2014
	Traffic Safety Barriers	<u>Functionality</u> : Functioning of Safety Barriers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014, IRC:119-2015

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
	End Treatment of Traffic Safety Barriers	<u>Functionality:</u> Functioning of End Treatment as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014, IRC:119-2015
	Attenuators	<u>Functionality:</u> Functioning of Attenuators as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP-2014, IRC:119-2015
	Guard Posts and Delineators	<u>Functionality:</u> Functioning of Guard Posts and Delineators as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC: 79 - 1981
	Overhead Sign Structure	Overhead sign structure shall be structurally adequate	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:67-2012
	Traffic Blinkers	<u>Functionality:</u> Functioning of Traffic Blinkers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014
Highway Lighting System	Highway Lights	Illumination: Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014
		No major failure in the lighting system	Daily	-	Rectification of failure	24 hours	IRC:SP:84-2014
		No minor failure in the lighting system	Monthly	-	Rectification of failure	8 hours	IRC:SP:84-2014
	Toll Plaza Canopy Lights	Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014
		No major/minor failure in the lighting system	Daily	-	Rectification of failure	8 hours	IRC:SP:84-2014

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Trees and Plantation including median plantation	Obstruction in a minimum head-room of 5.5 m above carriageway or obstruction in visibility of road signs	No obstruction due to trees	Monthly	Visual with video/image backup	Removal of trees	Immediate	IRC:SP:84-2014
	Deterioration in health of trees and bushes	Health of plantation shall be as per requirement of specifications & instructions issued by Authority from time to time	Daily	Visual with video/image backup	Timely watering and treatment. Or Replacement of Trees and Bushes.	Within 90 days	IRC:SP:84-2014
	Vegetation affecting sight line and road structures	Sight line shall be free from obstruction by vegetation	Daily	Visual with video/image backup	Removal of Trees	Immediate	IRC:SP 84-2014
Rest Areas	Cleaning of toilets	-	Daily	-	-	Every 4 hours	
	Defects in electrical, water and sanitary installations	-	Daily	-	Rectification	24 hours	
Other Project Facilities and Approach roads	Damage or deterioration in Approach Roads, pedestrian facilities, truck lay-bys, bus-bays, bus-shelters, cattle crossings, Traffic Aid Posts, Medical Aid Posts and other works		Daily	-	Rectification	15 days	IRC:SP 84-2014

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Pipe/box/ slab culverts	Free waterway/ unobstructed flow section	85% of culvert normal flow area to available.	2 times in a year (before and after rainy season)	Inspection by Bridge Engineer as per IRC SP: 35-1990 and recording of depth of silting and area of vegetation.	Cleaning silt up soils and debris in culvert barrel after rainy season, removal of bushes and vegetation, U/s of barrel, under barrel and D/s of barrel before rainy season.	15 days before onset of monsoon and within 30 days after end of rainy season.	IRC 5-2015, IRC SP:40-1993 and IRC SP:13-2004
	Leak-proof expansion joints if any	No leakage through expansion joints	Bi-Annually	Physical inspection of expansion joints as per IRC SP: 35-1990 if any, for leakage strains on walls at joints.	Fixing with sealant suitably	30 days or before onset of rains whichever comes earlier	IRC SP:40-1993 and IRC SP:69-2011
	Structurally sound	Spalling of concrete not more than 0.25 sqm	Bi-Annually	Detailed inspection of all components of culvert as per IRC SP:35-1990 and recording the defects	Repairs to spalling, cracking, delamination, rusting shall be followed as per IRC: SP: 40-1993.	15 days	IRC SP 40-1993 and MORTH Specifications clause 2800
		Cracks wider than 0.3 mm not more than 1m aggregate length					
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sqm, damage to solid apron (concrete apron) not more than 1 sqm	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40-1993 and IRC:SP:13-2004.

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Bridges including ROBs Flyover etc. as applicable	Riding quality or user comfort	No pothole in wearing coat on bridge deck	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC or wearing coat	15 days	MORT&H Specification 2811
Bridge - Super Structure	Bumps	No bump at expansion joint	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC on either side of expansion joints, profile correction on approach slab in case of settlement to approach embankment	15 days	MORT&H Specification 3004.2 & 2811.
	User safety (condition of crash barrier and guard rail)	No damaged or missing stretch of crash barrier or pedestrian hand railing	Daily	Visual inspection and detailed condition survey as per IRC SP: 35-1990.	Repairs and replacement of safety barriers as the case may be	3days	IRC: 5-1998, IRC SP: 84-2014 and IRC SP: 40-1993.
	Rusted reinforcement	Not more than 0.25 sqm	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out the repairs to affected concrete	15 days	IRC SP: 40-1993 and MORTH Specification 1600.
	Spalling of concrete	Not more than 0.50 sqm					
	Delamination	Not more than 0.50 sq.m					

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
					portion with epoxy mortar / concrete.		
	Cracks wider than 0.30 mm	Not more than 1m total length	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting with epoxy mortar, investigating causes for cracks development and carry out necessary rehabilitation.	48 Hours	IRC SP: 40-1993 and MORTH Specification 2800.
	Rainwater seepage through deck slab	Leakage - nil	Quarterly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting of deck slab at leakage areas, waterproofing, repairs to drainage spouts	1 months	MORTH specifications 2600 & 2700.
	Deflection due to permanent loads and live loads	Within design limits.	Once in every 10 years for spans more than 40 m	Load test method	Carry out major rehabilitation works on bridge to retain original design loads capacity	6 months	IRC SP: 51-1999.
	Vibrations in bridge deck due to moving trucks	Frequency of vibrations shall not be more than 5 Hz	Once in every 5 years for spans more than 30m and every 10 years for spans between 15	Laser displacement sensors or laser vibro-meters	Strengthening of super structure	4 months	AASHTO LRFD specifications

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
			to 30 m				
	Leakage in Expansion joints	No damage to elastomeric sealant compound in strip seal expansion joint, no leakage of rain water through expansion joint in case of buried and asphalt plug and copper strip joint.	Bi-Annually	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Replace of seal in expansion joint	15 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Debris and dust in strip seal expansion joint	No dust or debris in expansion joint gap.	Monthly	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Cleaning of expansion joint gaps thoroughly	3 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Drainage spouts	No down take pipe missing/broken below soffit of the deck slab. No silt, debris, clogging of drainage spout collection chamber.	Monthly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Cleaning of drainage spouts thoroughly. Replacement of missing/broken down take pipes with a minimum pipe extension of 500mm below soffit of slab. Providing sealant around the drainage spout if any leakages observed.	3 days	MORTH specification 2700.

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Bridge-substructure	Cracks/spalling of concrete/rusted steel	No cracks, spalling of concrete and rusted steel	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out repairs to substructure by grouting/guniting and micro concreting depending on type of defect noticed	30 days	IRC SP: 40-1993 and MORTH specification 2800.
	Bearings	Delamination of bearing reinforcement not more than 5%, cracking or tearing of rubber not more than 2 locations per side, no rupture of reinforcement or rubber	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	In case of failure of even one bearing on any pier/abutment, all the bearings on that pier/abutment shall be replaced, in order to get uniform load transfer on to bearings.	3 months	MORTH specification 2810 and IRC SP: 40-199.
Bridge Foundations	Scouring around foundations	Scouring shall not be lower than maximum scour level for the bridge	Bi-Annually	Condition survey and visual inspection as	Suitable protection works around pier/abutment	1 month	IRC SP: 40-1993, IRC 83-2014, MORTH

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
				per IRC SP:35-1990 using Mobile Bridge Inspection Unit. In case of doubt, use Underwater camera for inspection of deep wells in major Rivers.			specification 2500
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sq.m, damage to solid apron (concrete apron) not more than 1 sq.m	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching.	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40-1993 and IRC:SP:13-2004.
Note: Any Structure during the entire contract period which is found that does not complies with all requirements of this Table will be prepared, rehabilitated or even reconstructed under the scope of the contractor.							

Table 4: Maintenance Criteria for Structures and Culverts:

Table 5: Maintenance Criteria for Hill Roads

In addition to above, for hill roads the following provisions for maintenance is also to done.

Hill Roads		
(i)	Damage to Retaining wall/ Breast wall	7 (Seven) days
(ii)	Landslides requiring clearance	12 (Twelve) hours
(iii)	Snow requiring clearance	24 (Twenty Four) hours

Note: For all tables 1 to 5 above, latest BIS & IRC standards (even those not indicated herewith) along with MoRTH specifications shall be binding for all maintenance activities.

A. Flexible Pavement

Nature of Defect or deficiency		Time limit for repair/ rectification
(b) Granular earth shoulders, side slopes, drains and culverts		
(i)	Variation by more than 1 % in the prescribed slope of camber/cross fall (shall not be less than the camber on the main carriageway)	7 (seven) days
(ii)	Edge drop at shoulders exceeding 40 mm	7 (seven) days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 (thirty) days
(iv)	Rain cuts/gullies in slope	7 (seven) days
(v)	Damage to or silting of culverts and side drains	7 (seven) days
(vi)	Desilting of drains in urban/semi- urban areas	24 (twenty four) hours
(vii)	Railing, parapets, crash barriers	7 (seven) days (Restore immediately if causing safety hazard)
(c) Road side furniture including road sign and pavement marking		
(i)	Damage to shape or position, poor visibility or loss of retro- reflectivity	48 (forty eight) hours
(ii)	Painting of km stone, railing, parapets, crash barriers	As and when required/ Once every year
(iii)	Damaged/missing signs road requiring replacement	7 (seven) days
(iv)	Damage to road mark ups	7 (seven) days
(d) Road lighting		
(i)	Any major failure of the system	24 (twenty four) hours
(ii)	Faults and minor failures	8 (eight) hours
(e) Trees and plantation		
(i)	Obstruction in a minimum head- room of 5 m above carriageway or obstruction in visibility of road signs	24 (twenty four) hours
(ii)	Removal of fallen trees from carriageway	4 (four) hours
(iii)	Deterioration in health of trees and bushes	Timely watering and treatment
(iv)	Trees and bushes requiring replacement	30 (thirty) days
(v)	Removal of vegetation affecting sight line and road structures	15 (fifteen) days
(f) Rest area		
(i)	Cleaning of toilets	Every 4 (four) hours
(ii)	Defects in electrical, water and sanitary installations	24 (twenty four) hours
(g) [Toll Plaza]		
(h) Other Project Facilities and Approach roads		

Nature of Defect or deficiency		Time limit for repair/ rectification
(i)	Damage in approach roads, pedestrian facilities, truck lay- byes, bus-bays, bus-shelters, cattle crossings, [Traffic Aid Posts, Medical Aid Posts] and service roads	15 (fifteen) days
(ii)	Damaged vehicles or debris on the road	4 (four) hours
(iii)	Malfunctioning of the mobile crane	4 (four) hours
Bridges		
(a)	Superstructure	
(i)	Any damage, cracks, spalling/ scaling Temporary measures	within 48 (forty eight) hours
	Permanent measures	within 15 (fifteen) days or as specified by the Authority's Engineer
(b)	Foundations	
(i)	Scouring and/or cavitation	15 (fifteen) days
(c)	Piers, abutments, return walls and wing walls	
(i)	Cracks and damages including settlement and tilting, spalling, scaling	30 (thirty) days
(d)	Bearings (metallic) of bridges	
(i)	Deformation, damages, tilting or shifting of bearings	15 (fifteen) days Greasing of metallic bearings once in a year
(e)	Joints	
(i)	Malfunctioning of joints	15 (fifteen) days
(f)	Other items	
(i)	Deforming of pads in elastomeric bearings	7 (seven) days
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	3 (three) days
(iii)	Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days (immediately within 24 hours if posing danger to safety)
(iv)	Rain-cuts or erosion of banks of the side slopes of approaches	7 (seven) days
(v)	Damage to wearing coat	15 (fifteen) days
(vi)	Damage or deterioration in approach slabs, pitching, apron, toes, floor or guide bunds	30 (thirty) days
(vii)	Growth of vegetation affecting the structure or obstructing the waterway	15 (fifteen) days
(g)	Hill Roads	
(i)	Damage to retaining wall/breast wall	7 (seven) days
(ii)	Landslides requiring clearance	12 (twelve) hours
(iii)	Snow requiring clearance	24 (twenty four) hours

[Note: Where necessary, the Authority may modify the time limit for repair/rectification, or add to the nature of Defect or deficiency before issuing the bidding document, with the approval of the competent authority.]

Schedule - F

(See Clause 4.1 (vii)(a))

Applicable Permits

1. Applicable Permits

- (i) The Contractor shall obtain, as required under the Applicable Laws, the following Applicable Permits:
 - (a) Permission of the State Government for extraction of boulders from quarry;
 - (b) Permission of Village Panchayats and Pollution Control Board for installation of crushers;
 - (c) Licence for use of explosives;
 - (d) Permission of the State Government for drawing water from river/reservoir;
 - (e) Licence from inspector of factories or other competent Authority for setting up batching plant;
 - (f) Clearance of Pollution Control Board for setting up batching plant;
 - (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphalt plant;
 - (h) Permission of Village Panchayats and State Government for borrow earth; and
 - (i) Any other permits or clearances required under Applicable Laws.
- (ii) Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority in accordance with the provisions of this Agreement.

Schedule - G

(See Clauses 7.1 and 19.2)

Annex-I : Form of Bank Guarantee

(See Clause 7.1)

[Performance Security /Additional Performance Security]

[DG(RD)&SS,

Ministry of Road Transport & Highways Transport Bhawan, New Delhi]

WHEREAS:

- (A) _____ [name and address of contractor] (hereinafter called the "**Contractor**") and [name and address of the authority], (hereinafter called the "**Authority**") have entered into an agreement (hereinafter called the "**Agreement**") for the construction and upgradation of existing road to 2-lane with Paved shoulder from New Rolep Bridge at km. 37+600 to Chochenpheri at km. 52+000 in the section of Rongli to Chochenpheri of NH-717B under SARDP-NE Phase 'A' in the State of Sikkim on Engineering, Procurement and Construction (the "**EPC**") basis, subject to and in accordance with the provisions of the Agreement
- (B) The Agreement requires the Contractor to furnish a Performance Security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the {Construction Period/ Defects Liability Period and Maintenance Period} (as defined in the Agreement) in a sum of Rs _____ cr. (Rupees _____ crore) (the "Guarantee Amount").
- (C) We, _____ through our branch at _____ (the "**Bank**") have agreed to furnish this bank guarantee (*hereinafter called the "Guarantee"*) by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor's obligations during the {Construction Period/Defects Liability Period and Maintenance Period} under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways & Infrastructure Development Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court,

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Contractor contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfillment, compliance and/or performance of all or any of the obligations of the Contractor under the Agreement.
7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
8. The Guarantee shall cease to be in force and effect on *****¹. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.
9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to

¹ Insert date being 2 (two) years from the date of issuance of this Guarantee (in accordance with Clause 7.2 of the Agreement).

have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

Signed and sealed this _____ day of, 20____ at _____

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:
(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex - II
(Schedule - G)
(See Clause 19.2)

Annex – II: Form for Guarantee for Advance Payment

[DG (RD) &SS,

Ministry of Road Transport & Highways Transport Bhawan, New Delhi]

WHEREAS:

- (A) [name and address of contractor] (hereinafter called the "**Contractor**") has executed an agreement (hereinafter called the "**Agreement**") with the [name and address of the authority], (hereinafter called the "**Authority**") for the construction and upgradation of existing road to 2-lane with Paved shoulder from New Rolep Bridge at km. 37+600 to Chochenpheri at km. 52+000 in the section of Rongli to Chochenpheri of NH-717B under SARDP-NE Phase 'A' in the State of Sikkim on Engineering, Procurement and Construction (the "**EPC**") basis, subject to and in accordance with the provisions of the Agreement
- (B) In accordance with Clause 19.2 of the Agreement, the Authority shall make to the Contractor an interest bearing @Bank Rate + 3% advance payment (herein after called "**Advance Payment**") equal to 10% (ten per cent) of the Contract Price; and that the Advance Payment shall be made in two installments subject to the Contractor furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of such installment to remain effective till the complete and full repayment of the installment of the Advance Payment as security for compliance with its obligations in accordance with the Agreement. The amount of {first/second} installment of the Advance Payment is Rs. _____ cr. (Rupees _____ crore) and the amount of this Guarantee is Rs. _____ cr. (Rupees _____ crore) (the "**Guarantee Amount**")².
- (C) We, through our branch at (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways Authority of India], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for the repayment of the instalment of the Advance Payment under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever

² The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment

2. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
3. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
4. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
5. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Advance Payment.
6. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
7. The Guarantee shall cease to be in force and effect on ****³ Unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.
8. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
9. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

³ Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).

10. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

Signed and sealed this..... day of ... , 20..... at
SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:
(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.

The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch

Schedule-H

(See Clause 10.1 (iv) and 19.3)

Contract Price Weightages

1.1 The Contract Price for this Agreement is Rs -----

1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
1	2	3	4
Road works including culverts, widening and repair of culverts.	25.844 %	A- Widening and strengthening of existing road	
		(1) Earthwork up to top of the sub-grade	16.759%
		(2) Sub-base Course/CTSB	4.839%
		(3) Non Bituminous Base Course	0.00%
		(4) Bituminous Base Course/BSM	4.742%
		(5) Wearing Coat/BC	2.822%
		(6) Widening and repair of culvert	0.00%
		B1- Reconstruction/ New 2-Lane realignment/bypass (Flexible Pavement)	
		(1) Earthwork up to top of the sub-grade	35.568%
		(2) Cement Treated Sub Base (CTSB)	10.270%
		(3) Bituminous Stabilized Material (BSM)	10.065%
		(4) BC	5.989%
		B2- Reconstruction/ New 2-Lane realignment/bypass (Rigid Pavement)	
		(1) Earthwork up to top of the sub-grade	0.000%
		(2) Sub-base Course	0.000%
		(3) Dry Lean Concrete (DLC) Course	0.000%
		(4) Pavement Quality Control (PQC) Course	0.000%
		C1- Reconstruction/ New Service Road (Flexible Pavement)	
		(1) Earthwork up to top of the sub-grade	0.00%
		(2) Sub-base Course	0.00%
		(3) Non Bituminous Base Course	0.00%
		(4) Bituminous Base Course	0.00%
		(5) Wearing Coat	0.00%

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
		C2- Reconstruction/ New Service Road (Rigid Pavement)	
		(1) Earthwork up to top of the sub-grade	0.00%
		(2) Sub-base Course	0.00%
		(3) Dry Lean Concrete (DLC) Course	0.00%
		(4) Pavement Quality Control (PQC) Course	0.00%
		D - Re-Construction and new culverts on existing road, realignments on existing road, realignments, bypasses:	
		Culverts(Length<6m)	8.946%
Minor Bridges/Underpasses/ Overpasses	1.788%	<u>A1-Widening and Repairs of Minor Bridges (Length>6m and <60m)</u>	
		Minor bridges	0.00%
		<u>A2-New Minor Bridges (Length>6m and <60m)</u>	
		(1) Foundation	
		On completion of the foundation work including foundations for wing and return walls, abutments, piers.	20.579%
		(2) Sub-structure:	
		On completion of abutments, piers upto the abutment/ pier cap including wing/ return/ retaining wall upto top	47.298%
		(3) Super Structure:	
		On completion of the super-structure in all respects including Girder, Deck slab, bearings	24.449%
		(4) Approaches:	
		On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use	4.604%
		(5) Guide Bund and River Training Works:	
		On completion of Guide Bund and River Training Works complete in all respect.	0.00%
		(6) Other Ancilliary Works:	

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
		On completion of wearing coat, expansion joints, hand rails, crash barriers, road signs & markings, tests on completion in all respect.	3.070%
		B.1- Widening and repair of Underpasses/overpasses	
		Underpasses/Overpasses	0.00%
		B.2- New Underpasses/overpasses	
		(1) Foundation	
		On completion of the foundation work including foundations for wing and return walls, abutments, piers.	0.00%
		(2) Sub-structure	
		On completion of abutments, piers upto the abutment/ pier cap including wing/ return/ retaining wall upto top	0.00%
		(3) Super Structure:	
		On completion of the super-structure in all respects including Girder, Deck slab, bearings	0.00%
		Wearing Coat (a) in case of Overpass-wearing coat including expansion joint complete in all respect as specified and (b) in case of underpass rigid pavement including drainage facility complete in all respects as specified.	
		(4) On completion of Retaining / Reinforced earth walls, complete in all respect and fit for use	0.00%
		(5) Approaches and other Ancillary Works:	
Major Bridge (length>60m) works and		On completion of wearing coat, expansion joints, hand rails, crash barriers, stone pitching, protection works, road signs & markings, tests on completion in all respect. Wearing Coat (a) in case of Overpass wearing coat including expansion joints complete in all respect as specified and (b) in case of underpass-rigid pavement including drainage facility complete in all respects as specified	0.00%
		A.1 -Widening and repairs of Major Bridges	
	41.538%		

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
RUB/ROB/elevated sections/flyovers including viaducts, if any		(1) Foundation: on completion of the foundation work including foundations for return walls, abutments, piers	0.00%
		(2) Sub-structure: on completion abutments, piers upto the abutment/Pier cap	0.00%
		(3) Super-structure: On completion of the super-structure in all respects including girder, deck slab, bearings	0.00%
		(4) Wearing coat including expansion joints	0.00%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	0.00%
		(6) Wing walls/Return Walls	0.00%
		(7) Guide bunds, River Training Works etc	0.00%
		(8) Approaches (including retaining walls, stone pitching and protection works)	0.00%
		A.2 -New Major Bridges	
		(1) Foundation: on completion of the foundation work including foundations for return walls, abutments, piers	0.00%
		(2) Sub-structure: on completion abutments, piers upto the abutment/Pier cap	0.00%
		(3) Super-structure: On completion of the super-structure in all respects including girder,deck slab, bearings	0.00%
		(4) Wearing Coat including expansion joints	0.00%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	0.00%
		(6) Wing walls/Return Walls	0.00%
		(7) Guide bunds, River Training Works etc	0.00%
		(8) Approaches (including retaining walls, stone pitching and protection works)	0.00%
		B.1-Widening and repair of	
		(a) ROB	
		(b) RUB	
		(1) Foundation	0.00%

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
		(2) Sub-structure	0.00%
		(3) Super-structure (including bearings)	0.00%
		(4) Wearing Coat (a) in case of ROB - wearing coat including expansion joint complete in all respect as specified and (b) in case of RUB rigid pavement under RUB including drainage facility complete in all respects as specified.	0.00%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	0.00%
		(6) Wing walls/Return Walls	0.00%
		(7) Retaining/Reinforced earth walls	0.00%
		(8) Approaches and ancillary works (wearing coat, expansion joints, hand rails, crash barriers, road signs & markings, stone pitching, protection works etc.))	0.00%
		<u>B.2-New ROB/RUB</u>	
		(a) ROB	
		(b) RUB	
		(1) Foundation	0.00%
		(2) Sub-structure	0.00%
		(3) Super-structure (including bearings)	0.00%
		(4) Wearing Coat (a) in case of ROB - wearing coat including expansion joint complete in all respect as specified and (b) in case of RUB rigid pavement under RUB including drainage facility complete in all respects as specified.	0.00%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	0.00%
		(6) Wing walls/Return Walls	0.00%
		(7) Retaining/Reinforced earth walls	0.00%
		(8) Approaches and ancillary works (wearing coat, expansion joints, hand rails, crash barriers, road signs & markings, stone pitching, protection works etc.))	0.00%
		C.1- Widening and repair of Elevated Sections/Flyovers/Grade Separators	
		(1) Foundation	0.00%
		(2) Sub-structure	0.00%

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
		(3) Super-structure (including bearings)	0.00%
		(4) Wearing Coat including expansion joints.	0.00%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	0.00%
		(6) Wing walls/Return Walls	0.00%
		(7) Retaining/Reinforced earth walls	0.00%
		(8) Approaches and ancillary works (wearing coat, expansion joints, hand rails, crash barriers, road signs & markings, stone pitching, protection works etc.))	0.00%
		C.2.New Elevated Sections / Flyovers / Grade Separators	
		(1) Foundation: On completion of the foundation work including foundations for wing and return walls, abutments, piers.	9.195%
		(2) Sub-structure: On completion of abutments, piers upto the abutment/pier cap including wing/return/retaining wall upto top	29.452%
		(3) Super-structure: On completion of the super structure in all respects including girder, deck slab, bearings	51.891%
		(4) Wearing Coat including expansion joints.	3.785%
		(5) Miscellaneous items like hand rails, crash barriers, road markings etc.	5.677%
		(6) Wing walls/Return Walls	0.00%
		(7) Retaining/Reinforced earth walls	0.00%
		(8) Approaches and ancillary works (wearing coat, expansion joints, hand rails, crash barriers, road signs & markings, stone pitching, protection works etc.))	0.00%
Other works	30.830%		
		(i) Toll Plaza	0.00%
		(ii) Road side drains	
		Lined Drain/Catch water Drain	2.129%
		Cover Drain	0.000%
		(iii) Road signs, markings, km stones, safety devices, ...	2.950%

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
		(iv) Road Studs	0.751%
		(v) Project facilities	0.00%
		a) Bus Shelter	0.070%
		b) Truck lay bye	0.00%
		c) Rest Areas	0.00%
		d) Others (Includes junction and Site Clearance)	3.036%
		(vi) Retaining Wall	41.801%
		(vii) Breast Wall	10.974%
		(viii) RE Wall	0.00%
		(ix) Street Lighting	0.00%
		(x) Utility ducts	0.00%
		(xi) Parapet wall	2.874%
		(xii) Footpath and separators	0.00%
		(xiii) Hydroseeding by mechanical means	0.733%
		(xiv) Road side plantation including horticulture in wayside amenities	0.00%
		(xv) Slope Stabilization work by terra lock pins, terra lock anchors and turf reinforced mat	34.474%
		(xvi) Safety and traffic management during construction	0.208%
		(xvii) Protection works like pitching on side slopes, chutes, crash barrier	0.00%

1.3 Procedure of estimating the value of work done.

1.3.1 Road works

Procedure for estimating the value of road work done shall be as follows:

Table 1.3.1

Stage of Payment	Percentage - weightage	Payment Procedure
A- Widening and strengthening of existing road		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in a length of not less than 10 (ten) percent of the total length.
(1) Earthwork up to top of the sub-grade	16.759%	
(2) Sub-base Course/CTSB	4.839%	
(3) Non Bituminous Base Course	0.00%	
(4) Bituminous Base Course/BSM	4.742%	

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
(5) Wearing Coat/BC	2.822%	
(6) Widening and repair of culvert	0.00%	Cost of completed culverts shall be determined pro rate with respect to the total number of culverts. Payment shall be made on the completion of atleast five culverts.
B1- Reconstruction / New 2-Lane realignment / bypass (Flexible Pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5 (five) km length whichever is less.
(1) Earthwork up to top of the sub-grade	35.568%	
(2) Cement Treated Sub Base (CTSB)	10.270%	
(3) Bituminous Stabilized Material (BSM)	10.065%	
(4) BC	5.989%	
B2- Reconstruction/ New 2-Lane realignment/bypass (Rigid Pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5 (five) km length whichever is less.
(1) Earthwork up to top of the sub-grade	0.000%	
(2) Sub-base Course	0.000%	
(3) Dry Lean Concrete (DLC) Course	0.000%	
(4) Pavement Quality Control (PQC) Course	0.000%	
C1- Reconstruction/ New Service Road (Flexible Pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5 (five) km length whichever is less.
(1) Earthwork up to top of the sub-grade	0.00%	
(2) Sub-base Course	0.00%	
(3) Non Bituminous Base Course	0.00%	
(4) Bituminous Base Course	0.00%	
(5) Wearing Coat	0.00%	
C2- Reconstruction/ New Service Road (Rigid Pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5 (five) km length whichever is less.
(1) Earthwork up to top of the sub-grade	0.00%	
(2) Sub-base Course	0.00%	
(3) Dry Lean Concrete (DLC) Course	0.00%	
(4) Pavement Quality Control (PQC) Course	0.00%	
D - Re-Construction and new culverts on existing road, realignments on existing road, realignments, bypasses:		Cost of completed culverts shall be determined pro rate with respect to the total number of culverts. Payment shall be made on the completion of atleast five culverts.
Culverts (Length < 6m)	8.946%	

@ For calculation of payment stage for main-carriageway the project length shall be converted into equivalent 2 lane length. For example, if the total length of 4 lane main carriageway is 100 km, then the equivalent length for calculation of payment stage will be 2 x 100 km. Now, if the total length of bituminous work to be done is 100 km, the cost per km of bituminous work shall be determined as follows:

Cost per km = P x weightage for road work x weightage for bituminous work x (1/L)

Where

P = Contract Price

L = Total equivalent 2-Lane length in km as defined above

Similarly, the rates per km for other stages shall be worked out accordingly

Note: The length affected due to law and order problems or litigation during execution including the length not handed over to the Contractor under clause 8.3 of this Contract Agreement due to which the Contractor is unable to execute the work, may be deducted from the total project length for payment purposes. The total length calculated here is only for payment purposes and will not affect and referred in other clauses of the Contract Agreement.

1.3.2 Minor Bridge and Underpasses/Overpasses

Procedure for estimating the value of Minor Bridge works and Underpasses/Overpasses shall be stated in table 1.3.2

Table 1.3.2

Stage of Payment	Percentage - weightage	Payment Procedure
1	2	3
<u>A1-Widening and Repairs of Minor Bridges (Length>6m and <60m)</u>	0.0%	Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length of the minor bridges. Payment shall be made on the completion of widening and repair works of a minor bridge.
<u>A2-New Minor Bridges</u>		
(i) Foundation:		(i) Foundation: Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length (m) of the minor bridges. Payment against foundation+sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation each bridge.
On completion of the foundation work including foundations for wing and return walls, abutments, piers.	20.579%	In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified
(ii) Sub-structure:		
On completion of abutments, piers upto the abutment/pier cap including wing/return/retaining wall upto top	47.298%	Sub-structure: Cost of each minor bridge shall be determined on pro- rata basis with respect to the total linear length (m) of the minor bridges. Payment against sub- structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of sub-structure of each bridge.
(iii) Super Structure:		(ii) Super Structure:

Stage of Payment	Percentage - weightage	Payment Procedure
On completion of the super structure in all respects including girder,deck slab,bearings	24.449%	Super-structure: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of super structure of atleast one span in all respects as specified in the column of "Stage of Payment" in this sub- clause. In case of structures where pre-cast girders have been proposed by the Contractor, 50% of the stage payment shall be due and payable on casting of girders for each span and balance 50% of the stage payment shall be made on completion of stage specified as above
(iv) Approaches:		(iii) Approaches:
On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use	4.604%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of approaches in all respect as specified in the column of " Stage of Payment" in this sub clause.
(v) Guide Bund and River Training Works:		(iv) Guide Bund and River Training Works:
On completion of Guide Bund and River Training Works complete in all respect.	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of Guide Bunds and River Training Works in all respect as specified.
(6) Other Ancillary Works: On Completion of wearing coat,expansion joints, hand rails, crash barriers, road signs markings, tests on completion in all respect.	3.070%	Other Ancillary Works: Payment shall be made on pro-rata basis on completion of a stage in all respects as specified
B.1- Widening and repair of Underpasses/overpasses		Cost of each overpass/underpass shall be determined on pro rata basis with respect to the total linear length of the underpass/overpass. Payment shall be made on the completion of wiening & repair works of a underpass/overpass.
B.2- New Underpasses/overpasses		
(i) Foundation:		(i) Foundation: Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length (m) of the minor bridges. Payment against foundation+sub structure shall be made on pro rata basis on copletion of a stage i.e. not less than 25% of the scope of foundation each bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified
On completion of the foundation work including foundations for wing and return walls, abutments, piers.	0.00%	
(ii) Sub-structure:		
On completion of abutments, piers upto the abutment/pier cap including wing/return/retaining wall upto top	0.00%	Sub-structure: Cost of each minor bridge shall be determined on pro- rata basis with respect to the total linear length (m) of the minor bridges. Payment against sub- structure shall be made on pro-rata basis on completion of a stage

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
		i.e. not less than 25% of the scope of sub-structure of each bridge.
(iii) Super Structure:		(ii) Super Structure:
On completion of the super structure in all respects including girder,deck slab,bearings	0.00%	Super-structure: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of super structure of atleast one span in all respects as specified in the column of "Stage of Payment" in this sub- clause. In case of structures where pre-cast girders have been proposed by the Contractor, 50% of the stage payment shall be due and payable on casting of girders for each span and balance 50% of the stage payment shall be made on completion of stage specified as above
(iv) On completion of Retaining /Reinforced earth walls complete in all respect and fit for use	0.00%	Payments shall be made on pro rata basis on completion of 20% of the Total area.
(iii) Approaches:		(iii) Approaches:
On completion of approaches including Retaining Walls, stone pitching, protection works complete in all respect and fit for use	0.00%	Payment shall be made on pro rata basis on completion of a stage in all respect as specified

1.3.3 Major Bridge Works, ROB/RUB and Structures.

Procedure for estimating the value of Major Bridge Works, ROB/RUB and Structures work shall be as stated in table 1.3.3:

Table 1.3.3

Stage of Payment	Percentage - weightage	Payment Procedure
1	2	3
A1-Widening and Repairs of Major Bridges		
(i) Foundation:		(i) Foundation: Cost of each Major bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major bridges. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of Major Bridge subject to completion of atleast two foundations of the Major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
On completion of the foundation work including foundations for wing and return walls ,abutments,piers upto the abutment/pier cap	0.00%	
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including wing/ return/retaining wall upto top	0.00%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub structure of Major Bridge subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the major bridge.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respect including wearing coat, bearings, expansion joints, hand rails, crash barriers,road sign & markings, tests on completion etc. complete in all respect,	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.
(iv) Wearing Coat including expansion joints.		Wearing Coat
	0.00%	Payment shall be made on completion of wearing coat including expansion joints complete in all respect as specified.
(v) Miscellaneous items like hand rails, crash barriers, road markings etc.		(v) Miscellaneous
	0.00%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc.complete in all

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
		respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Guide bunds, River Training Works etc		(vii) Guide bunds, River Training Works etc
	0.00%	Payment shall be made on completion of all Guide bunds/River Training Works etc. complete in all respect as specified.
(viii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
A2-New Major Bridges		
(i) Foundation:		(i) Foundation: Cost of each Major bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major bridges. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of Major Bridge subject to completion of atleast two foundations of the Major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
On completion of the foundation work including foundations for wing and return walls ,abutments, piers.	0.00%	
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including wing/return/retaining wall upto top	0.00%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub structure of Major Bridge subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the major bridge.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respects including girder,deck slab,bearings	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.
(iv) Wearing Coat including expansion joints.		Wearing Coat
	0.00%	Payment shall be made on completion of wearing coat including expansion joints complete in all respect as specified.
(v) Miscellaneous items like hand		(v) Miscellaneous

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
rails, crash barriers, road markings etc.		
	0.00%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Guide bunds, River Training Works etc		(vii) Guide bunds, River Training Works etc
	0.00%	Payment shall be made on completion of all Guide bunds/River Training Works etc. complete in all respect as specified.
(viii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
B1 - Widening and repairs of		
(a) ROB		
(b) RUB		
(i) Foundation:	0.00%	(i) Foundation: Cost of each ROB/RUB shall be determined on pro rata basis with respect to the total linear length (m) of the ROB/RUB. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of ROB/RUB subject to completion of atleast two foundations of the ROB/RUB. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
On completion of the foundation work including foundations for wing and return walls ,abutments,piers upto the abutment/pier cap		
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including wing/ return/retaining wall upto top	0.00%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub structure of ROB/RUB subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the ROB/RUB.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respect including wearing coat, bearings, expansion joints, hand rails, crash barriers,road	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.

Stage of Payment	Percentage - weightage	Payment Procedure
sign & markings, tests on completion etc. complete in all respect,		
(iv) Wearing Coat including expansion joints in case of ROB. In case of RUB, rigid pavement under RUB including drainage facility as specified.		(iv) Wearing Coat:
	0.00%	Payment shall be made on completion of (a) in case of ROB - wearing coat including expansion joint complete in all respect as specified and (b) in case of RUB rigid pavement under RUB including drainage facility complete in all respects as specified.
(v) Miscellaneous items like hand rails, crash barriers, road markings etc.		(v) Miscellaneous
	0.00%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
B2 - New		
(a) ROB		
(b) RUB		
(i) Foundation:		(i) Foundation: Cost of each ROB/RUB shall be determined on pro rata basis with respect to the total linear length (m) of the ROB/RUB. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of ROB/RUB subject to completion of atleast two foundations of the ROB/RUB.
On completion of the foundation work including foundations for wing and return walls ,abutments, piers.	0.00%	In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including	0.00%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
wing/return/retaining wall upto top		than 25% of the scope of sub structure of ROB/RUB subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the ROB/RUB.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respects including girder,deck slab,bearings	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.
(iv) Wearing Coat including expansion joints in case of ROB. In case of RUB, rigid pavement under RUB including drainage facility as specified.		(iv) Wearing Coat:
	0.00%	Payment shall be made on completion of (a) in case of ROB - wearing coat including expansion joint complete in all respect as specified and (b) in case of RUB rigid pavement under RUB including drainage facility complete in all respects as specified.
(v) Miscellaneous items like hand rails, crash barriers, road markings etc.		(v) Miscellaneous
	0.00%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
C1 - Widening and repairs of Elevated Section/Flyovers/ Grade Separators		
(i) Foundation:	0.00%	(i) Foundation: Cost of each Structure shall be determined on pro rata basis with respect to the total linear length (m) of the structures. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of structures subject to completion of atleast two foundations of the structures.
On completion of the foundation work including foundations for wing and return walls ,abutments,piers upto the abutment/pier cap		

Stage of Payment	Percentage - weightage	Payment Procedure
		In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including wing/ return/retaining wall upto top	0.00%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub structure of structures subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the structures.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respect including wearing coat, bearings, expansion joints, hand rails, crash barriers, road sign & markings, tests on completion etc. complete in all respect.	0.00%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.
(iv) Wearing Coat including expansion joints.		Wearing Coat
	0.00%	Payment shall be made on completion of wearing coat including expansion joints complete in all respect as specified.
(v) Miscellaneous items like hand rails, crash barriers, road markings etc.		(v) Miscellaneous
	0.00%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
C2-New Elevated Section/ Flyovers/ Grade Separators		
(i) Foundation:		(i) Foundation: Cost of each Structure shall be determined on pro rata basis with respect to the total linear length (m) of the structures. Payment against foundation shall be made on pro rata basis on completion of a stage i.e. not less than
On completion of the foundation work including foundations for wing and return walls, abutments, piers.	9.195%	

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

Stage of Payment	Percentage - weightage	Payment Procedure
		25% of the scope of foundation of structures subject to completion of atleast two foundations of the structures. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(ii) Sub Structure:		(ii) Sub Structure:
On completion of abutments, piers upto the abutment/pier cap including wing/return/retaining wall upto top	29.452%	Payment against sub structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub structure of structures subject to completion of atleast two sub structure of the abutment/pier upto abutment/pier cap level of the structures.
(iii) Super Structure		(iii) Super Structure:
On completion of the super structure in all respects including girder, deck slab, bearings	51.891%	Payment shall be made on pro rata basis on completion of a stage i.e. completion of super structure including bearings of atleast one span in all respect as specified.
(iv) Wearing Coat including expansion joints.		Wearing Coat
	3.785%	Payment shall be made on completion of wearing coat including expansion joints complete in all respect as specified.
(v) Miscellaneous items like hand rails, crash barriers, road markings etc.		(v) Miscellaneous
	5.677%	Payment shall be made on completion of all Miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respect as specified.
(vi) Wing walls/Return Walls		(vi) Wing walls/Return Walls
	0.00%	Payment shall be made on completion of all Wing walls/Return Walls complete in all respect as specified.
(vii) Approaches (including retaining walls, stone pitching and protection works)		(viii) Approaches:
	0.00%	Payment shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.

1.3.4 Other works.

Procedure for estimating the value of other works done shall be as stated in table 1.3.4:

Table 1.3.4

Stage of Payment	Weightage	Payment Procedure
(i) Toll Plaza	0.00%	Unit of measurement is each completed toll plaza. Payment of each toll plaza shall be made on pro

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

Stage of Payment	Weightage	Payment Procedure
		rata basis with respect to the total of all toll plazas.
(ii) Road side drains		Unit of measurement is linear length in km. Payment shall be made on pro rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.
Lined Drain/ Catch Water Drain	2.129%	
Cover Drain	0.000%	
(iii) Road signs, markings, km stones, safety devices, etc.	2.950%	
(iv) Road Studs	0.751%	Payment shall be made on pro rata basis for completed facilities.
(v) Project facilities	0.00%	
a) Bus Shelter	0.070%	
b) Truck Lay Bye	0.00%	
c) Rest Areas	0.00%	
d) Others (Includes junction and Site Clearance)	3.036%	
(vi) Retaining Wall / Breast wall	41.801% 10.974%	Unit of measurement is linear length. Payment shall be made on pro-rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.
(vii) RE Wall	0.00%	Unit of measurement is linear length. Payment shall be made on pro-rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.
(viii) Street Lighting	0.00%	Unit of measurement is linear length. Payment shall be made on pro rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.
(ix) Utility ducts	0.00%	
(x) Parapet wall	2.874%	
(xi) Footpath and separators	0.00%	
(xii) Hydro-seeding by mechanical means	0.733%	
(xiii) Road side plantation	0.00%	
(xiv) Slope Stabilization work by terra lock pins, terra lock anchors and turf reinforced mat	34.474%	
(xv) Safety and traffic management during construction	0.208%	Payment shall be made on prorata basis every six month.
(xvi) Protection works like pitching on side slopes, chutes, crash barrier	0.000%	Unit of measurement is linear length. Payment shall be made on pro rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.

2. Procedure for payment for Maintenance

2.1 The cost for maintenance shall be as stated in Clause 14.1(v).

2.2 Payment for Maintenance shall be made in quarterly installments in accordance with the provisions of Article 14 and Article 19.

Schedule -I

(See Clause 10.2 (iv))

Drawings

1. Drawings

In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

2. Additional Drawings

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.

Annex -I

(Schedule -I)

Annex –I: List of Drawings

[Note: The Authority shall describe in this Annex-I, all the Drawings that the contractor is required to furnish under Clause 10.2.]

Schedule - J

(See Clause 10.3 (ii))

Project Completion Schedule

1. Project Completion Schedule

During Construction period, the Contractor shall comply with the requirements set forth in this Schedule-J for each of the Project Milestones and the **Scheduled Completion Date**. Within 15 (fifteen) days of the date of each Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

2. Project Milestone-I

- (i) Project Milestone-I shall occur on the date falling on the **319th** day from the Appointed Date (the "**Project Milestone-I**").
- (ii) Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 10% (ten per cent) of the Contract Price.

3. Project Milestone-II

- (i) Project Milestone-II shall occur on the date falling on the **548th** day from the Appointed Date (the "**Project Milestone- II**").
- (ii) Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 35% (thirty five per cent) of the Contract Price **and should have started construction of all bridges**

4. Project Milestone-III

- (i) Project Milestone-III shall occur on the date falling on the **776th** day from the Appointed Date (the "**Project Milestone- III**").
- (ii) Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 70% (seventy per cent) of the Contract Price and **should have started construction of all project facilities**.

5. Scheduled Completion Date

- (i) The Scheduled Completion Date shall occur on the **913th** day from the Appointed Date.
- (ii) On or before the Scheduled Completion Date, the Contractor shall have completed construction in accordance with this Agreement.

6. Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

Schedule - K

(See Clause 12.1 (ii))

Tests on Completion

1. Schedule for Tests

- (i) The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10 (ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- (ii) The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule-K.

2. Tests

- (i) Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include [***].
- (ii) Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a Network Survey Vehicle (NSV) fitted with latest equipments and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometre.
- (iii) Tests for bridges: All major and minor bridges shall be subjected to the rebound hammer and ultrasonic pulse velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Nondestructive Testing Techniques, at two spots in every span, to be chosen at random by the Authority's Engineer. Bridges with a span of 15 (fifteen) metres or more shall also be subjected to load testing.
- (iv) Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with Good Industry Practice, for determining the compliance of the Project Highway with Specifications and Standards, except tests as specified in clause 5, but shall include measuring the reflectivity of road markings and road signs; and measuring the illumination level (lux) of lighting using requisite testing equipment.

- (v) Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- (vi) Safety Audit: The Authority's Engineer shall carry out, or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

3. Agency for conducting Tests

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

4. Completion Certificate

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

5. The Authority Engineer will carry out tests with following equipment at his own cost in the presence of contractor's representative.

Sr. No.	Key metrics of Asset	Equipment to be used	Frequency of condition survey
1	Surface defects of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
2	Roughness of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
3	Strength of pavement	Falling Weight Deflectometer (FWD)	At least once a year
4	Bridges	Mobile Bridge Inspection Unit (MBU)	At least twice a year (As per survey months defined for the state basis rainy season)
5	Road signs	Retro-re flectometer	At least twice a year (As per survey months defined for the state basis rainy season)

The first testing with the help of NSV shall be conducted at the time of issue of Completion Certificate.

Schedule - L
(See Clause 12.2)

Completion Certificate

1. I (Name of the Authority's Engineer), acting as the Authority's Engineer, under and in accordance with the Agreement dated (the "**Agreement**"), for construction and upgradation of existing road to 2-lane with Paved shoulder from New Rolep Bridge at km. 37+600 to Chochenpheri at km. 52+000 in the section of Rongli to Chochenpheri of NH-717B under SARDP-NE Phase 'A' in the State of Sikkim on Engineering, Procurement and Construction (the "**EPC**") basis through..... (Name of Contractor), hereby certify that the Tests in accordance with Article 12 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement, and I am satisfied that the Project Highway can be safely and reliably placed in service of the Users thereof.
2. It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highway have been completed, and the Project Highway is hereby declared fit for entry into operation on this the day of20....., Scheduled Completed Date for which was the..... day of..... 20.....

SIGNED, SEALED AND DELIVERED

For and on behalf of the Authority's Engineer by:

(Signature)

(Name)

(Designation) (Address)

Schedule - M
(See Clauses 14.6, 15.2 and 19.7)

Payment Reduction for Non-Compliance

1. Payment reduction for non-compliance with the Maintenance Requirements

- (i) Monthly lump sum payments for maintenance shall be reduced in the case of non-compliance with the Maintenance Requirements set forth in Schedule-E.
- (ii) Any deduction made on account of non-compliance with the Maintenance Requirements shall not be paid even after compliance subsequently. The deductions shall continue to be made every month until compliance is done.
- (iii) The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph 2.

2. Percentage reductions in lump sum payments on monthly basis

- (i) The following percentages shall govern the payment reduction:

S.No.	Item/Defect/Deficiency	Percentage
(a)	Carriageway/Pavement	
(i)	Potholes, cracks, other surface defects	15%
(ii)	Repairs of Edges, Rutting	5%
(b)	Road, Embankment, Cuttings, Shoulders	
(i)	Edge drop, inadequate cross fall, undulations, settlement, potholes, ponding, obstructions	10%
(ii)	Deficient slopes, raincuts, disturbed pitching, vegetation growth, pruning of trees	5%
(c)	Bridges and Culverts	
(i)	Desilting, cleaning, vegetation growth, damaged pitching, flooring, parapets, wearing course, footpaths, any damage to foundations	20%
(ii)	Any Defects in superstructures, bearings and sub-structures	10%
(iii)	Painting, repairs/replacement kerbs, railings, parapets, guideposts/crash barriers	5%
(d)	Roadside Drains	
(i)	Cleaning and repair of drains	5%
(e)	Road Furniture	
(i)	Cleaning, painting, replacement of road signs, delineators, road markings, 200 m/km/5 th km stones	5%
(f)	Miscellaneous Items	
(i)	Removal of dead animals, broken down/accident vehicles, fallen trees, road blockades or malfunctioning of mobile crane	10%
(ii)	Any other Defects in accordance with paragraph 1.	5%
(g)	Defects in Other Project Facilities	5%

- (ii) The amount to be deducted from monthly lump-sum payment for non-compliance of particular item shall be calculated as under:

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

$$R = P/100 \times (M1 \text{ or } M2) \times L1/L$$

Where,

P= Percentage of particular item/Defect/deficiency for deduction

M1= Monthly lump-sum payment in accordance para 1.2 above of this Schedule

M2= Monthly lump-sum payment in accordance para 1.2 above of this Schedule

L1 = Non-complying length L = Total length of the road,

R= Reduction (the amount to be deducted for non-compliance for a particular item/Defect/deficiency)

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or non-compliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

Schedule - N

(See Clause 18.1 (i))

Selection of Authority's Engineer

1. Selection of Authority's Engineer

- (i) The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority's Engineer.
- (ii) In the event of termination of the Technical Consultants appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

2. Terms of Reference

The Terms of Reference for the Authority's Engineer (the "**TOR**") shall substantially conform with Annex 1 to this Schedule N.

3. Appointment of Government entity as Authority's Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority's Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority's Engineer.

Annex -I
(Schedule - N)

Annex –I: Terms of Reference for Authority's Engineer

1. Scope

- (i) These Terms of Reference (the "**TOR**") for the Authority's Engineer are being specified pursuant to the EPC Agreement dated (the "**Agreement**"), which has been entered into between the [name and address of the Authority] (the "**Authority**") and..... (the "**Contractor**")# for construction and upgradation of existing road to 2-lane with Paved shoulder from New Rolep Bridge at km. 37+600 to Chochenpheri at km. 52+000 in the section of Rongli to Chochenpheri of NH-717B under SARDP-NE Phase 'A' in the State of Sikkim on Engineering, Procurement and Construction (the "**EPC**") basis, and a copy of which is annexed hereto and marked as Annex-A to form part of this TOR.

- In case the bid of Authority's Engineer is invited simultaneously with the bid of EPC project, then the status of bidding of EPC project only to be indicated

- (ii) The TOR shall apply to construction and maintenance of the Project Highway.

2. Definitions and interpretation

- (i) The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- (ii) References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.
- (iii) The rules of interpretation stated in Article 1 of the Agreement shall apply, mutatis mutandis, to this TOR.

3. General

- (i) The Authority's Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.
- (ii) The Authority's Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority before determining:
- (a) any Time Extension;
 - (b) any additional cost to be paid by the Authority to the Contractor;
 - (c) the Termination Payment; or

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

- (d) issuance of Completion Certificate or
 - (e) any other matter which is not specified in (a), (b), (c) or (d) above and which creates a financial liability on either Party.
- (iii) The Authority's Engineer shall submit regular periodic reports, at least once every month, to the Authority in respect of its duties and functions under this Agreement. Such reports shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.
 - (iv) The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
 - (v) The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
 - (vi) In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

4. Construction Period

- (i) During the Construction Period, the Authority's Engineer shall review and approve the Drawings furnished by the Contractor along with supporting data, including the geo-technical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1 (vi). The Authority's Engineer shall complete such review and approval and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- (ii) The Authority's Engineer shall review and approve any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.
- (iii) The Authority's Engineer shall review and approve the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty one) days stating the modifications, if any, required thereto.
- (iv) The Authority's Engineer shall complete the review and approve of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.

- (v) The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- (vi) The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.
- (vii) The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.
- (viii) The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- (ix) For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4 (ix), the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance.
- (x) The Authority's Engineer shall test check at least 50 (fifty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- (xi) The timing of tests referred to in Paragraph 4 (ix), and the criteria for acceptance/ rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.
- (xii) In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.
- (xiii) The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- (xiv) In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.

- (xv) The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.2.
- (xvi) Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- (xvii) In the event that the Contractor carries out any remedial measures to secure the safety of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.
- (xviii) The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate, as the case may be. For carrying out its functions under this Paragraph 4 (xviii) and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

5. Maintenance Period

- (i) The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- (ii) The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.
- (iii) The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in this behalf.
- (iv) In respect of any defect or deficiency referred to in Paragraph 3 of Schedule- E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of

deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.

- (v) The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause 14.5.

6. Determination of costs and time

- (i) The Authority's Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.
- (ii) The Authority's Engineer shall determine the period of Time Extension that is required to be determined by it under the Agreement.
- (iii) The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause 18.5.

7. Payments

- (i) The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2 (iv) (d).
- (ii) Authority's Engineer shall -
 - (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
 - (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable to the Contractor, after adjustments in accordance with the provisions of Clause 19.10.
- (iii) The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.

- (iv) The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

8. Other duties and functions

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

9. Miscellaneous

- (i) A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authority forthwith.
- (ii) The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.
- (iii) Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an as-built survey illustrating the layout of the Project Highway and setback lines, if any, of the buildings and structures forming part of Project Facilities; and shall hand them over to the Authority against receipt thereof.
- (iv) The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- (v) The Authority's Engineer shall inform the Authority and the Contractor of any event of Contractor's Default within one week of its occurrence.

Schedule - O

(See Clauses 19.4 (i), 19.6 (i), and 19.8 (i))

Forms of Payment Statements

1. Stage Payment Statement for Works

The Stage Payment Statement for Works shall state:

- (a) the estimated amount for the Works executed in accordance with Clause 19.3 (i) subsequent to the last claim;
- (b) amounts reflecting adjustments in price for the aforesaid claim;
- (c) the estimated amount of each Change of Scope Order executed subsequent to the last claim;
- (d) amounts reflecting adjustment in price, if any, for (c) above in accordance with the provisions of Clause 13.2 (iii) (a);
- (e) total of (a), (b), (c) and (d) above;
- (f) Deductions:
 - i. Any amount to be deducted in accordance with the provisions of the Agreement except taxes;
 - ii. Any amount towards deduction of taxes; and
 - iii. Total of (i) and (ii) above.
- (g) Net claim: (e) - (f) (iii);
- (h) The amounts received by the Contractor upto the last claim:
 - iv. For the Works executed (excluding Change of Scope orders);
 - v. For Change of Scope Orders, and
 - vi. Taxes deducted

2. Monthly Maintenance Payment Statement

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the Agreement;
- (b) the deductions for maintenance work not done;
- (c) net payment for maintenance due, (a) minus (b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction of taxes

3. Contractor's claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

Schedule - P

(See Clause 20.1)

Insurance

1. Insurance during Construction Period

- (i) The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire and terrorism:
 - (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
 - (b) insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- (ii) The insurance under sub para (a) and (b) of paragraph 1(i) above shall cover the Authority and the Contractor against all loss or damage from any cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

2. Insurance for Contractor's Defects Liability

The Contractor shall effect and maintain insurance cover of not less than 15% of the Contract Price for the Works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and which arises from a cause occurring prior to the issue of the Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

3. Insurance against injury to persons and damage to property

- (i) The Contractor shall insure against its liability for any loss, damage, death or bodily injury, or damage to any property (except things insured under Paragraphs 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number of occurrences.

The insurance cover shall be not less than: Rs. [*****]

- (ii) The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:
 - (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works; and
 - (b) damage which is an unavoidable result of the Contractor's obligations to

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase ‘A’ in the State of Sikkim.

execute the Works.

4. Insurance to be in joint names

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

Schedule-Q

(See Clause 14.10)

Tests on Completion of Maintenance Period

1. Riding Quality test:

Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,200 (two thousand and two hundred only)] mm for each kilometre.

2. Visual and physical test:

The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include measurement of cracking, rutting, stripping and potholes and shall be as per the requirement of maintenance mentioned in Schedule-E.

Schedule-R

(See Clause 14.10)

Taking Over Certificate

I,..... (Name and designation of the Authority's Representative) under and in accordance with the Agreement dated..... (the **"Agreement"**), for construction and upgradation of existing road to 2-lane with Paved shoulder from New Rolep Bridge at km. 37+600 to Chochenpheri at km. 52+000 in the section of Rongli to Chochenpheri of NH-717B under SARDP-NE Phase 'A' in the State of Sikkim on Engineering, Procurement and Construction (the **"EPC"**) basis

Through (Name of Contractor), hereby certify that the Tests on completion of Maintenance Period in accordance with Article 14 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement and I hereby certify that the Authority has taken over the Project highway from the Contractor on this day

SIGNED, SEALED AND DELIVERED

(Signature)

(Name and designation of Authority's Representative)

(Address)

Construction and upgradation of existing road to 2-lane with Paved shoulder from km. 37+600 (New Rolep Bridge) to km. 52+000 (Chochenpheri) of Rhenok – Menla spur (NH-717B) Package-II C on EPC Basis under SARDP-NE Phase 'A' in the State of Sikkim.

*******END OF THE DOCUMENT*******