Schedules

Schedule-A

(See Clauses 2.1 and 8.1)

Site of the Project

1 The Site

- (i) Site of the Four Lane Project Bridge shall include the land, buildings, structures and road works as described in Annex-I of this Schedule-A.
- (ii) The dates of handing over the Right of Way to the Contractor are specified in Annex-II of this Schedule-A.
- (iii) An inventory of the Site including the land, buildings, structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Contractor, and such inventory shall form part of the memorandum referred to in Clause 8.2 (i) of this Agreement.
- (iv) The alignment plans of the Project Highway are specified in Annex-III. In the case of sections where no modification in the existing alignment of the Project Highway is contemplated, the alignment plan has not been provided. Alignment plans have only been given for sections where the existing alignment is proposed to be upgraded. The proposed profile of the Project Highways shall be followed by the contractor with minimum FRL as indicated in the alignment plan. The Contractor, however, improve/upgrade the Road Profile as indicated in Annex-III based on site/design requirement.
- (v) The status of the environment clearances obtained or awaited is given in Annex-IV.

Annex - I

(Schedule-A)

Site

[Note: Through suitable drawings and description in words, the land, buildings, structures and road works comprising the Site shall be specified briefly but precisely in this Annex-I. All the chainages/location referred to in Annex-I to Schedule-A shall be existing chainages.]

1. Site

The Site of the Four Lane Project Bridge comprises the section of [National Highway 37] commencing at km 95.500 i.e. the Imphal - Jiribam section in the State of Manipur. The land, carriageway and structures comprising the Site are described below.

2. Land

The Site of the Project Highway comprises the land (sum total of land already in possession and land to be possessed) as described below:

S. No.	Chainage ((km)	Right of Way (m)	Remarks
3. NO.	From	То	Right of Way (iii)	Kemarks
1	95+283	95+660	8.00 to 15.00	Hill

3. Carriageway

The present carriageway of the Project Highway is Two Lane. The type of the existing pavement is flexible.

4. Major Bridges

The Site includes the following Major Bridges:

S.	Chainage	Type of Structure			No. of Spans	Width		
No.	(km)	Foundation	Sub- structure	Super- structure	with span length (m)	(m)		
	NIL							

5. Road over-bridges (ROB)/ Road under-bridges (RUB)

The Site includes the following ROB (road over railway line)/RUB (road under railway line):

S. No.	Chainage (km)	Type o	of Structure	No. of Spans with span	Width (m)	ROB/ RUB			
NO.	(KIII)	Foundation	Superstructure	length (m)	(111)	KOB			
	NIL								

6. Grade separators

The Site includes the following grade separators:

S.	Chainage (km)			No. of Spans with span length (m)	Width (m)
No.	(KIII)	Foundation	Superstructure	span length (m)	(III)
			NIL		

7. Minor bridges

The Site includes the following minor bridges:

	Chainage	Т	Type of Struc	No. of Spans	Width	
No.	(km)	Foundation	Sub- structure	Super- structure	with span length (m)	(m)
1	95+500	Open	RCC	Steel + Wooden deck (Bailey Brdige)	1 no. 42.8m	5.6

8. Railway level crossings

The Site includes the following railway level crossings:

S. No.	Location (km)	Remarks				
	NIL					

9. Underpasses (vehicular, non vehicular)

The Site includes the following underpasses:

S. No.	Chainage (km)	Type of Structure	No. of Spans with span length (m)	Width (m)			
NIL							

10. Culverts

The Site has the following culverts:

S. No.	Chainage (km)	Type of Culvert	Span /Opening with span length (m)	Width (m)
1	95+610	RCC SLAB	1x4.50	10
2	94+713	RCC SLAB	1x3.10	9.8

11. Bus bays

The details of bus bays on the Site are as follows:

S. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side				
	NIL							

12. Truck Lay byes

The details of truck lay byes are as follows:

S. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side				
	NIL							

13. Road side drains

The details of the roadside drains are as follows:

S. No.	Location		Туре		
	From km	to km	Masonry/cc (Pucca)	Earthen (Kutcha)	
			NIL		

14. Major junctions

The details of major junctions are as follows:

S. No.	Location		At Separated	Category of Cross Road				
	From km	to km	grade		NH	SH	MDR	Others
	NIL							

(NH: National Highway, SH: State Highway, MDR: Major District Road)

15. Minor junctions

The details of the minor junctions are as follows:

S. No.	Location		Ту	pe
	From km	From km To km		Cross road
1	95+585	95+595		Y

16. Bypasses

The details of the existing road sections proposed to be bypassed are as follows:

S. No.	Name of bypass	Chainage (km) From	Length (in
	(town)	km to km	Km)
	NIL		

[17. Other structures: NIL

[Provide details of other structures, if any.]

Annex - II

(*As per Clause 8.3 (i)*)

(Schedule-A)

Dates for providing Right of Way of Construction Zone

The dates on which the Authority shall provide Right of Way of Construction Zone to the Contractor on different stretches of the Site are stated below:

Sl. No	From km to km	Length (km)	Width (m)	Date of providing Right of Way*
(1)	(2)	(3)	(4)	(5)
(i) Full Right of Way (full width)(a) Stretch	95+439 to 95+562	0.123	42	At appointed date
(b) Stretch				
(c) Stretch				
(ii) Part Right of Way (part width)				At appointed
(a) Stretch	95+283 to 95+439	0.156	Varying from	date or within 150 (one
(b) Stretch	95+562 to 95+660	0.098	24m to 42m	hundred and fifty) days after
(c) Stretch				the Appointed Date
(iii) Balance Right of Way (width)				
(a) Stretch				
(b) Stretch				
(c) Stretch				

^{*}The dates specified herein shall in no case be beyond 150 (one hundred and fifty) days after the Appointed Date.

Annex - III

(Schedule-A)

Alignment Plans

The existing alignment of the Project Bridge shall be modified in the following sections as per the alignment plan indicated below:

- (i) The alignment of the Project Bridge is enclosed in alignment plan. Finished road level indicated in the alignment plan shall be followed by the contractor as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.
- (ii) Traffic Signage plan of the Project Highway showing numbers & location of traffic signs is enclosed. The contractor shall, however, improve/upgrade upon the traffic signage plan as indicated in Annex-III based on site/design requirement as per the relevant specifications/IRC Codes/Manual.

Annex - IV

(Schedule-A)

Environment Clearances

The following environment clearances have been obtained: [NA]

The following environment clearances are awaited: [NA]

Schedule - B

(See Clause 2.1)

Development of the Project Highway

1. Development of the Project Highway

Development of the Project Bridge shall include design and construction of the Project Highway as described in this Schedule-B and in Schedule-C.

2. Augmentation

Augmentation shall include Four-Laning of the Project Bridge as described in Annex-I of this Schedule-B and in Schedule-C.

3. Specifications and Standards

The Project Bridge shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-I of Schedule-D.

Annex - I

(Schedule-B)

Description of Four-Laning

[Note: Construction of 4-Lane Bridge over Irang River on Imphal- Jiribam road section (95.500Km) of NH-37 (Old NH-53) in the State of Manipur on EPC mode and in pursuance to IRC: 87, IRC: 78, IRC: 83)], referred to as the Manual and other relevant standards, specifications or details.]

1. Widening of the Existing Highway

(i) The Project Highway shall follow the existing alignment unless otherwise specified by the Authority and shown in the alignment plans specified in Annex-III of Schedule-A. Geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for [plain/rolling] terrain to the extent land is available.

(ii) Width of Carriageway

(a) Four-Laning [with/without] paved shoulders shall be undertaken. The paved carriageway shall be 7m to 25m wide in accordance with the typical cross sections drawings in the Manual.

Provided that in the built-up areas [refer to paragraphs 2.1 (ii) (a) of the Manual and provide necessary details]: the width of the carriageway shall be as specified in the following table:

Sl. No.	Built-up stretch (Township)	Location (km to km)	Width (m)	Typical cross section (Ref. to Manual)	
	NIL				

(b) Except as otherwise provided in this Agreement, the width of the paved carriageway and cross-sectional features shall conform to paragraph 1.1 above.

2. Geometric Design and General Features

(i) General

Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the Manual.

(ii) Design speed

The design speed shall be the minimum design speed of 45 km per hr.

(iii) Improvement of the existing road geometrics

[Refer to paragraph 2.1 (v) of the Manual and provide details]

In the following sections, where improvement of the existing road geometrics to the prescribed standards is not possible, the existing road geometrics shall be improved to the extent possible within the given right of way and proper road signs and safety measures shall be provided:

Sl. No.	Stretch (from km to km)	Type of deficiency	Remarks

(iv) Right of Way

[Refer to paragraph 2.3 of the Manual]. Details of the Right of Way are given in Annex II of Schedule-A.

(v) Type of shoulders

[Refer to paragraph 2.5.2 of the Manual and specify]

(a) In built-up sections, footpaths/fully paved shoulders shall be provided in the following stretches:

Sl. No.	Stretch (from km to km)	Fully paved shoulders/ footpaths	Reference to cross section
1	Km 95+283 to 95+439	Paved Shoulder	Varying from TCS-1 to TCS-2
2	Km 95+562 to 95+660	Paved Shoulder	Varying from TCS-2 to TCS-1

- (b) In open country, [paved shoulders of 1.5 m width shall be provided and balance 1.0m width shall be covered with 150 mm thick compacted layer of granular material].
- (c) Design and specifications of paved shoulders and granular material shall conform to the requirements specified in the relevant Manual.

(vi) Lateral and vertical clearances at underpasses

- (a) Lateral and vertical clearances at underpasses and provision of guardrails/crash barriers shall be as per the provision of relevant Manual.
- (b) Lateral clearance: The width of the opening at the underpasses shall be as follows:

Sl. No.	Location (Chainage) (from km to km)	Span/ opening (m)	Remarks
	NIL		

- (vii) Lateral and vertical clearances at overpasses
 - (a) Lateral and vertical clearances at overpasses shall be as per the provision of relevant Manual.
 - (b) Lateral clearance: The width of the opening at the overpasses shall be as follows:

Sl. No.	Location (Chainage) (from km to km)	Span/opening (m)	Remarks

(viii) Service roads

Service roads shall be constructed at the locations and for the lengths indicated below: [Refer to the provision of relevant Manual and provide details]

Sl. No.	Location of service road (from km to km)	Right hand side (RHS)/Left hand side (LHS)/ or Both sides	Length (km) of service road
		NIL	

- (ix) Grade separated structures
 - (a) Grade separated structures shall be provided as per provision of the relevant Manual. The requisite particulars are given below:

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Location of structure	Length (m)	Number and length of spans (m)		Remarks, if any	
	NIL					

(b) In the case of grade separated structures, the type of structure and the level of the Project Highway and the cross roads shall be as follows: [Refer to the provision of relevant Manual and specify the type of vehicular under pass/ overpass structure and whether the cross road is to be carried at the existing level, raised or lowered]

Sl. No.	Location	Type of structure	Cı	oss road	at	Remarks, if
NO.		Length (m)	Existing Level	Raised Level	Lowered Level	any
			NIL			

(x) Cattle and pedestrian underpass /overpass

Cattle and pedestrian underpass/ overpass shall be constructed as follows: [Refer to the provision of relevant Manual and specify the requirements of cattle and pedestrian underpass/ overpass]


Sl. No.	Location	Type of crossing
		NIL

(xi) Typical cross-sections of the Project Highway


[Give typical cross-sections of the Project Highway by reference to the Manual]


Design Chainage		Typical Cross section
<u>From</u>	<u>To</u>	Typical Cross section
95+283	95+439	TCS-1 varies to TCS - 2
95+439	95+562	TCS-3
95+562	95+660	TCS-2 varies to TCS -1

ROAD NAME - IMPHAL TO JIRIBAM

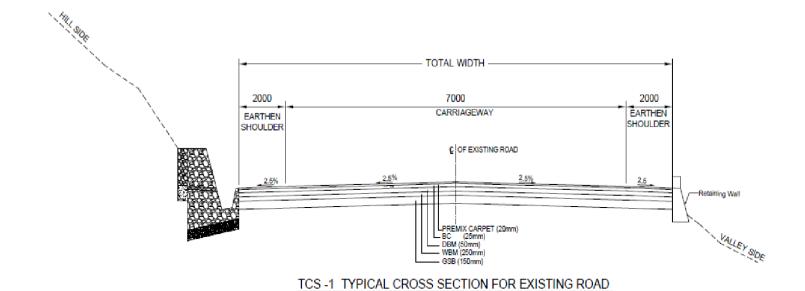

(AT THROUGH CUTTING PORTION)

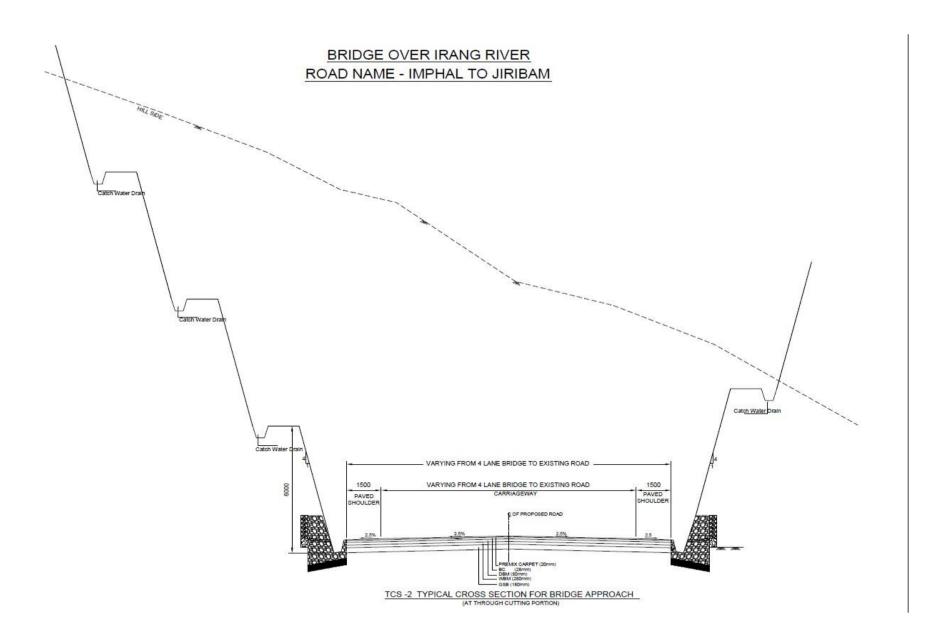

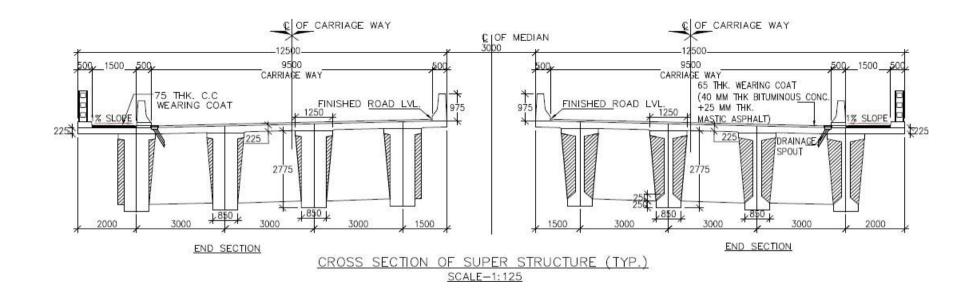

TCS-3

3. Intersections and Grade Separators

All intersections and grade separators shall be as per the provision of relevantManual. Existing intersections which are deficient shall be improved to the prescribed standards.

[Refer to the provision of relevant Manual and specify the requirements. Explain where necessary with drawings/sketches/general arrangement]

Properly designed intersections shall be provided at the locations and of the types and features given in the tables below:

(i) At-grade intersections

Sl. No.	Location of intersection	Туре	of intersection	Other features
NIL				

(ii) Grade separated intersection with/without ramps

Sl. No.	Location	Salient features	Minimum length of viaduct to be provided	Road to be carried over/under the structures	
	NIL				

4. Road Embankment and Cut Section

- (i) Widening and improvement of the existing road embankment/cuttings and construction of new road embankment/ cuttings shall conform to the Specifications and Standards given in Section 4 of the Manual and the specified cross sectional details. Deficiencies in the plan and profile of the existing road shall be corrected.
- (ii) Raising of the existing road [Refer to the provision of relevant Manual and specify sections to be raised]

The existing road shall be raised in the following sections:

Sl. No.	Section (from km to km)	Length	Extent of raising [Top of finished road level]
		NIL	

5. Pavement Design

(i) Pavement design shall be carried out in accordance with the provision of relevant Manual.

(ii) Type of pavement

[Refer to the provision of relevant Manual and state specific requirement, if any, of providing cement concrete pavement.]

(iii) Design requirements

[Refer to the provision of relevant Manual and specify design requirements and strategy]

(a) Design Period and strategy

Flexible pavement for new pavement or for widening and strengthening of the existing pavement shall be designed for a minimum design period of 15 years. Stage construction shall not be permitted.

(b) Design Traffic

Notwithstanding anything to the contrary contained in this Agreement or the Manual, the Contractor shall design the pavement for a design traffic of 20 million standard axles.

(iv) Reconstruction of stretches

[Refer to the provision of relevant Manual and specify the stretches, if any, to be reconstructed.]

The following stretches of the existing road shall be reconstructed. These shall be designed as new pavement.

Sl. No.	Stretch From km to km	Remarks
1	Km 95+283 to Km 95+439	Approaches towards Imphal
2	Km 95+439 to Km 95+562	Bridge Portion
3	Km 95+562 to Km 95+660	Approaches towards Jiribam

6. Roadside Drainage

Drainage system including surface and subsurface drains for the Project Highway shall be provided as per the provision of relevant Manual.

7. Design of Structures

(i) General

- (a) All bridges, culverts and structures shall be designed and constructed in accordance with the provision of relevant Manual and shall conform to the cross- sectional features and other details specified therein.
- (b) Width of the carriageway of new bridges and structures shall be as follows:

[Refer to the provision of relevant Manual and specify the width of carriageway of new bridges and structures of more than 60 (sixty) metre length, if the carriageway width is different from 7.5 (seven point five) metres in the table below.]

Sl. No.	Bridge at km	Width of carriageway and cross-sectional features ¹	
1	95+500	Twin Bridge with CW =9.5 m & TW 12.5 m	
		TCS No. TCS-3	

(c) The following structures shall be provided with footpaths:

[Refer to the provision of relevant Manual and provide details of new Structures with footpath.]

Sl. No.	Location at km	Remarks
1	95+500	Bridge

(d) All bridges shall be high-level bridges.

[Refer to the provision of relevant Manual and state if there is any exception]

(e) The following structures shall be designed to carry utility services specified in table below:

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Bridge at km	Utility service to be carried	Remarks
NIL			

(f) Cross-section of the new culverts and bridges at deck level for the Project Highway shall conform to the typical cross-sections given in the provision of relevant Manual.

(ii) Culverts

(a) Overall width of all culverts shall be equal to the roadway width of the approaches.

(b) Reconstruction of existing culverts:

The existing culverts at the following locations shall be re-constructed as new culverts:

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Culvert location	Span/Opening (m)	Remarks, if any*
1	95+660	3x3 & 12 m Width	Box Culvert

¹ Attach typical cross-section, if necessary.

-

*[Specify modifications, if any, required in the road level, etc.]

(c) Widening of existing culverts:

All existing culverts which are not to be reconstructed shall be widened to the roadway width of the Project Highway as per the typical cross section given in the provision of relevant Manual. Repairs and strengthening of existing structures where required shall be carried out.

Sl. No.	Culvert location	Type, span, height and width of existing culvert (m)	Repairs to be carried out [specify]
NIL			

(d) Additional new culverts shall be constructed as per particulars given in the table below:

Sl No.	Culvert location	Span/Opening (m)	
	NIL		

(e) Repairs/replacements of railing/parapets, flooring and protection works of the existing culverts shall be undertaken as follows:

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Location at km	Type of repair required
		NIL

- (f) Floor protection works shall be as specified in the relevant IRC Codes and Specifications.
- (iii) Bridges
 - (a) Existing bridges to be re-constructed/widened
 - [(i) The existing bridges at the following locations shall be re-constructed as new Structures]

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Bridge location (km)	Salient details of existing bridge	Adequacy or otherwise of the existing waterway, vertical clearance, etc*	Remarks	
	NIL				

^{*}Attach GAD

(ii) The following narrow bridges shall be widened:

Sl. No.	Location (km)	Existing width (m)		Cross-section at deck level for widening @
	NIL			

@ Attach cross-section

(b) Additional new bridges

[Specify additional new bridges if required, and attach GAD]

New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.

Sl. No.	Location (km)	Total length (m)	Remarks, if any
1	95+500	123 m	Location of bridge shifted from the existing bridge

(c) The railings of existing bridges shall be replaced by crash barriers at the following locations:

[Refer to the provision of relevant Manual and provide details:]

Sl. No.	Location at km	Remarks
	NIL	

(d) Repairs/replacements of railing/parapets of the existing bridges shall be undertaken as follows:

[Refer to the provision of relevant Manual and provide details]

Sl. No.	Location at km	Remarks
	NIL	

(e) Drainage system for bridge decks

An effective drainage system for bridge decks shall be provided as specified in paragraph 7.20 of the Manual

(f) Structures in marine environment

[Refer to paragraph 7.22 of the Manual and specify the necessary measures / treatments for protecting structures in marine environment, where applicable]

(iv) Rail-road bridges

(a) Design, construction and detailing of ROB/RUB shall be as specified in the provision of relevant Manual. [Refer to paragraph 7.19 of the Manual and specify modification, if any]

(b) Road over-bridges

Road over-bridges (road over rail) shall be provided at the following level crossings, as per GAD drawings attached:

Sl. No.	Location of Level crossing (Chainage km)	Length of bridge (m)
	NIL	

(c) Road under-bridges

Road under-bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

Sl. No.	Location of Level crossing (Chainage km)	Number and length of span (m)	
	NIL		

(v) Grade separated structures

[Refer to paragraph 7.20 of the Manual]

The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2 (ix) and 3 of this Annex-I.

(vi) Repairs and strengthening of bridges and structures

[Refer to paragraph 7.23 of the Manual and provide details]

The existing bridges and structures to be repaired/strengthened, and the nature and extent of repairs /strengthening required are given below:

(a) Bridges

Sl. No.	Location of bridge (km)	Nature and extent of repairs /strengthening to be carried out	
	NIL		

(b) ROB / RUB

Sl. Io.	Location of ROB/RUB (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

(c) Overpasses/Underpasses and other structures

Sl.	Location of	Nature and extent of repairs /strengthening to be

No.	Structure (km)	carried out
		NIL

(vii) List of Major Bridges and Structures

The following is the list of the Major Bridges and Structures:

Sl. No.	Location
1	95+500

8. Traffic Control Devices and Road Safety Works

- (i) Traffic control devices and road safety works shall be provided in accordance with Section 9 of the Manual.
- (ii) Specifications of the reflective sheeting. [Refer to paragraph 9.3 of the Manual and specify]

9. Roadside Furniture

- (i) Roadside furniture shall be provided in accordance with the provision of Section 11 of the Manual.
- (ii) Overhead traffic signs: location and size

[Refer to paragraph 11.5 of the Manual and provide details]

10. Compulsory Afforestation

[Refer to paragraph 12.1 of the Manual and specify the number of trees which are required to be planted by the Contractor as compensatory afforestation.]

11. Hazardous Locations

The safety barriers shall also be provided at the following hazardous locations:

Sl. No.	Location stretch from (km) to (km)	LHS/RHS
	NIL	

12. Special Requirement for Hill Roads

[Refer to paragraphs 14.5 and 14.8 of the Manual and provide details where relevant and required.]

13. Change of Scope

The length of Structures and bridges specified hereinabove shall be treated as an approximate assessment. The actual lengths as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule-B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of Article 13.

(Schedule B-1)

1. The shifting of utilities and felling of trees shall be carried out by the Contractor. The cost of the same shall be borne by the Authority. The details of utilities are as follows:

Sr. No	Type of Utility	Unit	Quantity	Location/stretch (LHS/RHS)
A	Electrical Utilities			
A1	Electrical Poles	Nos.	2	
A2	Electrical cables	meters	20 (approx.)	
А3	Transformers	Nos.	NIL	
-				
-				
В	Water/Sewage pipeline			
B1	Sewage	meters	NIL	
B2	Water supply	meters	NIL	
-				
-				
С	Felling of Tress	Nos.	20	

Schedule - C

(See Clause 2.1)

Project Facilities

1. Project Facilities

The Contractor shall construct the Project Facilities in accordance with the provisions of this Agreement. Such Project Facilities shall include:

- (a) toll plaza[s]; NIL
- (b) roadside furniture; NIL
- (c) pedestrian facilities; YES
- (d) tree plantation; NIL
- (e) truck lay-byes; NIL
- (f) bus-bays and bus shelters; NIL
- (g) rest areas; NIL and
- (h) others to be specified NIL

2. Description of Project Facilities

Each of the Project Facilities is described below:

Sl. No.	Project Facility	Location	Design Requirements	Other essential details
1	Pedestrian Facilities	Km 95+439 to Km 95+562	Footpath	TCS-3

Note: Provide adequate details of each Project Facility to ensure their design and completion in accordance with the project-specific requirements and the provisions of the Manual.

Schedule - D

(See Clause 2.1)

Specifications and Standards

1. Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project Highway.

2. Design Standards

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

[Manual of Specifications and Standards for Four Laning of Highways,

i.	IRC: SP: 84, 2014	 Manual for Four Lane Highway with Paved Shoulder
ii.	IRC:78-2014	 Section VII, Foundations and Structure
iii.	IRC:6-2017	 Section II, loads and Stresses
iv.	IRC:112-2011	 Code for Concrete Road Bridges
v.	IRC:37-2012	 Guidelines for the Design of Flexible Pavements
vi.	IRC:SP:13-2004	 Guidelines for design of small bridges and culverts
vii.	IRC:5-2015	 Section I, General Features of Design

viii. IS : 2911 (Part-1/Sec-1)-2010 -- Design And Construction Of Pile Foundations - Code Of Practice

[Note: Specify the relevant Manual, Specifications and Standards]

Annex - I

(Schedule-D)

Specifications and Standards for Construction

1. Specifications and Standards

All Materials, works and construction operations shall conform to the Manual of Specifications and Standards for Four-Laning of Highways (IRC:SP:84-2014), referred to as the Manual, IRC: 78, 2014 - Section VII: Foundations and Substructure, IRC: 6,2017 - Section II, loads and Stresses, IRC:112-2011 - Code for Concrete Road Bridges, IRC:SP:13-2004 - Guidelines for design of small bridges and culverts, IS: 2911 (Part-1/Sec-1)-2010 - Design And Construction Of Pile Foundations - Code Of Practice, IRC:5-2015 - Section I, General Features of Design and MORTH Specifications for Road and Bridge Works. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

2. Deviations from the Specifications and Standards

- (i) The terms "Concessionaire", "Independent Engineer" and "Concession Agreement" used in the Manual shall be deemed to be substituted by the terms "Contractor", "Authority's Engineer" and "Agreement" respectively.
- (ii) [Notwithstanding anything to the contrary contained in Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, the aforesaid Specifications and Standards shall be deemed to be amended to the extent set forth below:]
- (iii) [Note 1: Deviations from the aforesaid Specifications and Standards shall be listed out here. Such deviations shall be specified only if they are considered essential in view of project-specific requirements.]

Sl. No.	Stretch From km	Pavement	Remarks
	to km	Compositions	
1.	95+283 to 95+439	Compositions for	Traffic obtained in Imphal-Jiribam in
2.	95+562 to 95+660	5msa traffic (PLATE-6 of IRC: 37-2012)	2017 is 5 msa but minimum Design msa for 4-lane traffic for life of 15 year is taken 20 msa

Schedule - E

(See Clauses 2.1 and 14.2)

Maintenance Requirements

1. Maintenance Requirements

- (i) The Contractor shall, at all times maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- (ii) The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfilment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Termination thereof.
- (iii) All Materials, works and construction operations shall conform to the MORTH Specifications for Road and Bridge Works, and the relevant IRC publications. Where the specifications for a work are not given, Good Industry Practice shall be adopted.

[Specify all the relevant documents]

2. Repair/rectification of Defects and deficiencies

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex - I of this Schedule-E within the time limit set forth therein.

3. Other Defects and deficiencies

In respect of any Defect or deficiency not specified in Annex - I of this Schedule-E, the Authority's Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority's Engineer.

4. Extension of time limit

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Suchadditional time shall be determined by the Authority's Engineer and conveyed to the Contractor and the Authority with reasons thereof.

5. Emergency repairs/restoration

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage

to property, the Contractor shall promptly take all reasonable measures for eliminating or minimizing such danger.

6. Daily inspection by the Contractor

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at any time during office hours.

7. Pre-monsoon inspection / Post-monsoon inspection

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

8. Repairs on account of natural calamities

All damages occurring to the Project Highway on account of a Force Majeure Event or wilful default or neglect of the Authority shall be undertaken by the Authority at its own cost. The Authority may instruct the Contractor to undertake the repairs at the rates agreed between the Parties.

Annex - I

(Schedule-E)

Repair/rectification of Defects and deficiencies

The Contractor shall repair and rectify the Defects and deficiencies specified in this Annex-I of Schedule-E within the time limit set forth in the table below.

Table -1: Maintenance Criteria for Pavements:

	Perform		f Service OS)	Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
Flexible Pavement (Pavement of MCW, Service Road, approache	Potholes	Nil	< 0.1 % of area and subject to limit of 10 mm in depth		Length Measuremen t Unit like Scale, Tape, odometer etc.	IRC 82: 2015 and Distress Identification Manual for Long Term Pavement Performance Program, FHWA 2003 (http://www.tfhrc.com/pavement/lttp/ reports/03031/)	24-48 hours	MORT&H Specificatio n 3004.2

	Perform		f Service OS)	Freque ncy of Inspect ion	Tools/Equip ment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
s of Grade structure, approache s of connecting roads, slip roads, lay byes etc.		Nil	< 5 % subject to limit of 0.5 sqm for any 50 m length	Daily			7-15 days	MORT&H Specificatio n 3004.3
applicable	Rutting	Nil	< 5 mm	Daily	Straight Edge		15 -30 days	MORT&H Specificatio n 3004.2
	Corrugatio ns and Shoving	Nil	< 0.1 % of area	Daily	Length Measuremen t Unit like		2-7 days	IRC:82- 2015

	Perform		of Service .OS)	Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
	Bleeding	Nil	< 1 % of area	Daily	Scale, Tape, odometer etc.		3-7 days	MORT&H Specificatio n 3004.4
	Ravelling / Stripping	Nil	< 1 % of area	Daily			7-15 days	IRC:82- 2015 read with IRC SP 81
	Edge Deformati on/ Breaking	Nil	< 1 m for any 100 m section and width < 0.1 m at any location,				7- 15 days	IRC:82- 2015

	Perform ance Paramet er	Level of Service (LOS)		Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons	
Asset Type		Desirable	Accepta ble						
			restricte d to 30 cm from the edge						
	Roughness BI	2000 mm/km	2400 mm/km	Bi- Annuall y	Class I Profilometer	Class I Profilometer: ASTM E950 (98):2004 –Standard Test Method for	180 days	IRC:82- 2015	
	Skid Number	60SN	50SN	Bi- Annuall y	(Sideway- force Coefficient	(Sideway- force Coefficient	measuring Longitudinal Profile of Travelled Surfaces with Accelerometer Established Inertial Profiling Reference ASTM E1656 -94: 2000- Standard Guide for Classification of Automatic Pavement	180 days	BS: 7941-1: 2006
	Pavement Condition Index	3	2.1	Bi- Annuall y	Routine Investigation Machine or equivalent)	Condition Survey Equipment	180 days	IRC:82- 2015	

	Perform	Level of Service (LOS)		Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
	Other Pavement Distresses			Bi- Annuall y			2-7 days	IRC:82- 2015
	Deflection/ Remaining Life			Annual ly	Falling Weight Deflectomete r	IRC 115: 2014	180 days	IRC:115- 2014
Rigid Pavement (Pavemen	Roughness BI	2200m m/km	2400mm /km	Bi- Annuall y	Class I Profilometer	ASTM E950 (98) :2004 and ASTM E1656 - 94: 2000	180 days	IRC:SP:83- 2008
t of MCW, Service Road, Grade structure,	Skid	Skid Resistance no. at different speed of vehicles		Bi- Annuall y	SCRIM (Sideway- force	IRC:SP:83-2008	180 days	IRC:SP:83- 2008

	Perform		of Service (LOS)	Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
approach es of connectin g roads, slip		Minimum SN	Traffic Speed (Km/h)		Coefficient Routine Investigation Machine or equivalent)			
roads, lay byes etc.		36	50		equivalency			
as applicabl e)		33	65					
		32	80					
		31	95					
		31	110					

	Perform	Level of Service (LOS)		Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
	Edge drop at shoulders	Nil	40m m	Daily	ily		7-15 days	MORT&H Specificatio n 408.4
Embankm ent/ Slope	Slope of camber/c ross fall	Nil	of camber /cross	Length Measuremen	IRC	7-15 days	MORT&H Specificatio n 408.4	
	Embankme nt Slopes	Nil	<15 % variation in	Daily	t Unit like Scale, Tape, odometer etc.		7-15 days	MORT&H Specificatio n 408.4

	Perform	Level of Service (LOS)		Freque ncy of Inspect ion	Tools/Equip	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintena nce Specificati ons
Asset Type	ance Paramet er	Desirable	Accepta ble					
			prescribe side slope					
	Embankme nt Protection	Nil	Nil	Daily	NA		7-15 days	MORT&H Specification
	Rain Cuts/ Gullies in slope	Nil	Nil	Daily Speciall y During Rainy Season	NA		7-15 days	MORT&H Specification

In addition to the above performance criterion, the contractor shall strictly maintain the rigid pavements as per requirements in the following table

Table -2: Maintenance Criteria for Rigid Pavements:

			Б		Repair Action		
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < 1)/2	For the case d > D/2	
				CRACKING			
			0	Nil, not discernible	No Action	Not applicable	
	Single Discrete	w = width of crack L = length of crack d = depth of crack D = depth of slab	1	w < 0.2 mm. hair cracks	No Action	Not applicable	
1	intersecting with any			w = 0.2 - 0.5 mm, discernible from slow-moving car		Seal, and stitch if L > lm.	
			3	w = 0.5 - 1.5 mm, discernible from fast-moving car	Seal without delay	Within 7days	

		Measured	Dogwoo of		Repair Action		
S.No.	Type of Distress	Parameter Parameter	Degree of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2	
			4	w = 1.5 - 3.0 mm	Seal, and stitch if $L > l$ m. Within 7 days	Staple or Dowel Bar Retrofit, FDR for	
			5	w > 3 mm.		affected portion. Within 15days	
			0	Nil, not discernible	No Action		
			1	w < 0.2 mm, hair cracks	Route and seal with	=	
2	(or Diagonal) Crack intersecting with one		2	w = 0.2 - 0.5 mm, discernible from slow vehicle		Retrofit. Within 15days	
		-	I ≺	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route, seal and stitch, if L > 1 m. Within 7 days		

		Measured	Degree of Severity		Repair Action		
S.No.	Type of Distress	Parameter		Assessment Rating	For the case d < D/2	For the case d > D/2	
			4	w = 3.0 - 6.0 mm	******	Full Depth Repair Dismantle and reconstruct affected. Portion with norms and specifications	
			5	w > 6 mm, usually associated with spalling, and/or slab rocking under traffic	Not Applicable, as it may	Coo Dara F F & O 2	
			0	Nil, not discernible	No Action		
3		w = width of crackL = length of crackd = depth of crackD = depth of slab	1	w < 0.5 mm, discernable from slow moving vehicle	Seal with epoxy, if L > 1 m.	Staple or dowel bar retrofit. Within 15days	

					Repair Action	
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2
				w = 0.5 - 3.0 mm, discernible from fast vehicle	Route seal and stitch, if L > l m. Within 15 days	-
			3	w = 3.0 - 6.0 mm	Staple, if L > 1 m. Within 15 days	Partial Depth Repair with stapling.
			1 44	w = 6.0 - 12.0 mm, usually associated with spalling	Not Applicable, as it may	Within 15 days
			5	w > 12 mm, usually associated with spalling, and/or slab rocking under traffic	be full h depth	Full Depth Repair Dismantle and reconstruct affected portion as per norms and specifications -

					Repair Action		
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < 11/7	For the case d > D/2	
						See Para 5.6.4	
						Within 15 days	
			0	Nil, not discernible	No Action		
			1	w < 0.2 mm, hair cracks	Full depth repair within 15 days	-	
	Multiple Cracks		,	w = 0.2 - 0.5 mm. discernible from slow vehicle			
	intersecting with one or more joints	l <u>L</u>	3	w = 0.5 - 3.0 mm, discernible from fast vehicle		Dismantle, Reinstate subbase,	
			4	w = 3.0 - 6.0 mm panel broken into 2 or 3 pieces		Reconstruct whole slab as per specifications within	
			5	w > 6 mm and/or panel broken		30 days	

	Type of Distress	Measured Parameter	Degree of Severity		Repair Action		
S.No.				Assessment Rating	For the case d < D/2	For the case d > D/2	
				into more than 4 pieces			
	Corner Break		0	Nil, not discernible	No Action	-	
		w = width of crack L = length of crack	1	w < 0.5 mm; only 1 corner broken	secure broken parts Within 7 days	Seal with epoxy seal	
			,	w < 1.5 mm; L < 0.6 m, only one corner broken		with epoxy Within 7days	
5			3	w < 1.5 mm; L < 0.6 m, two corners broken			
			4	w > 1.5 mm; L > 0.6 m or three corners broken		Full depth repair	
			5	ree or four corners broken	Within 15 days	Reinstate sub-base, and reconstruct the slab as per norms	

		Measured Parameter	_		Repair Action		
S.No.	Type of Distress		Degree of Severity	Assessment Rating	For the case d < 1)/2	For the case d > D/2	
						and specifications within 30days	
			0	Nil, not discernible		No Action	
			1	w < 0.5 mm; L < 3 m/m ²	Not Applicable, as it may be full depth	Seal with low	
	Punchout (Applicable to		2	either $w > 0.5 \text{ mm or } L < 3 \text{ m/m}^2$		viscosity epoxy to secure broken parts.	
6	Continuous Reinforced Concrete	w = width of crack L = length (m/m2)	3	w > 1.5 mm and L < 3 m/m ²		Within 15days	
	Pavement (CRCP) only)		1 Д.	w > 3 mm, L < 3 m/m ² and deformation		Full depth repair - Cut out and replace damaged area taking	
			5	w > 3 mm, L > 3 m/m ² and deformation		care not to damage reinforcement. Within 30days	

		Macaurad	Daguag of		Repair Action		
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < 1)/7	For the case d > D/2	
				Surface Defects			
			0	Nil, not discernible	Short Term	Long Term	
		r = area damaged surface/total surface of slab (%) h = maximum depth of damage	U	·	No action.		
			1	r < 2 %	Local repair of areas damaged		
7	Honeycomb type surface		surface of slab (%) h = maximum depth	2	r = 2 - 10 %	and liable to be damaged. Within 15 days	Not Applicable
			3	r = 10-25%	Bonded Inlay, 2 or 3 slabs		
			4	r = 25 - 50 %	affecting.		

			Dogwoo of		Repair Action	
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < 11/7	For the case d > D/2
					Within 30 days	
			5	r > 50% and h > 25 mm	Reconstruct slabs, 4 or more slabs if affecting. Within 30 days	
				Nil, not discernible	Short Term	Long Term
		r = damaged			No action.	
8	surface/total 8 Scaling surface of slab (%)				Local repair of areas damaged	
		2	1 - 2 - 10 /0	and liable to be damaged. Within 7days	Not Applicable	

		Managed	Dograp of	Assessment Rating	Repair Action		
S.No.	Type of Distress	Measured Parameter	Degree of Severity		Lor the case d < 11/7	For the case d > D/2	
			3	r = 10 - 20%	Bonded Inlay within 15		
			4	r = 20 - 30 %	days		
			5	r > 30 % and h > 25 mm	Reconstruct slab within 30 days		
			0		-No action.	Not Applicable	
			1	t > 1 mm	NO action.		
1 9	g i	t = texture depth, sand patch test	2'	t = 1 - 0.6 mm			
		3	3	t = () 6 - () 3 mm	Monitor rate of deterioration		
			4	t = 0.3 - 0.1 mm			

		Measured	Degree of Severity		Repair Action	
S.No.	Type of Distress	Parameter		Assessment Rating	For the case d < 11/7	For the case d > D/2
			5	t < 0.1 mm	Diamond Grinding if affecting 50% or more slabs in a continuous stretch of minimum 5 km. Within 30 days	
			0	d < 50 mm; h < 25 mm; n < 1 per 5 m ²	No action.	
	Popout (Small Hole), Pothole Refer Para 8.4		1	nor 5 m/	Partial depth repair 65 mm deep.	Not Applicable
			2	d = 50 - 100 mm; h > 50 mm; n < 1	Within 15 days	

			Dograp of		Repair Action		
S.No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	For the case d < 1)/2	For the case d > D/2	
				per 5 m ²			
				d = 100 - 300 mm; h < 100 mm n < 1 per 5 m ²	Partial depth repair 110mm		
			4	d = 100 - 300 mm; h > 100 mm; n < 1 per 5 m ²	i.e.10 mm more than the depth of the hole.		
					Within 30 days		
			, h	d > 300 mm; h > 100 mm: n > 1 per 5 m ²	Full depth repair. Within 30 days		

	Joint Defects								
			0	Difficult to discern.	Short Term	Long Term			
	11 Joint Seal Defects L = Length as % to		0		No action.				
11		loss or damage L = Length as % total joint length		Discernible, L< 25% but of little immediate consequence with regard to ingress of water or trapping incompressible material.	Clean joint, inspect later.				
	3	3	insufficient protection against ingress of water and trapping	selected locations.	Not Applicable				
			5	Severe; w > 3 mm negligible protection against ingress of water	Clean, widen and reseal the joint.				

				and trapping incompressible material.	Within 7 days	
			0	Nil, not discernible	No action.	
			1		Apply low viscosity epoxy resin/ mortar in cracked portion.	
		2	w = 10 - 20 mm, L < 25%	Within 7 days		
12	Spalling of Joints	w = width on either side of the joint L = length of spalled portion (as % joint length)	3	w = 20 - 40 mm, L > 25%	Partial Depth Repair. Within 15 days	Not Applicable
			4	w = 40 - 80 mm, L > 25%	30 - 50 mm deep, h = w + 20% of w, within 30 days	
		5	w > 80 mm, and L > 25%	50 - 100 mm deep repair. $H = w + 20%$ of w. Within 30 days		
13	Faulting (or Stepping)	f = difference of level	0	not discernible, < 1 mm	No action.	No action.

	in Cracks or Joints		1	f < 3 mm		
			2	I f = 3 - 6 mm	Determine cause and observe, take action for diamond grinding	Replace the slab as appropriate.
			3	f = 6 - 12 mm	Diamond Grinding	Within 30days
			4	f= 12 - 18 mm	Raise sunken slab.	Replace the slab as
			5		Strengthen subgrade and sub-base by grouting and raising sunken slab	appropriate. Within 30days
			0	Nil not diagonnible	Short Term	Long Term
14		h = vertical displacement from	0	Nil, not discernible	No Action	
14 Diowup of Ducking		displacement from- normal profile	1	h < 6 mm	No Action	
			2	h = 6 - 12 mm	Install Signs to Warn Traffic	

			3	h = 12 - 25 mm	within 7 days	
			4	h > 25 mm	Full Depth Repair. Within 30 days	
			5	shattered slabs, ie 4 or more pieces	Replace broken slabs. Within 30 days	
		h = negative vertical displacement from normal profile L =length	0	Not discernible, h < 5 mm	No action.	
			1	h = 5 - 15 mm		
15	Depression			h = 15-30 mm, Nos <20% joints	Install Signs to Warn Traffic	Not Applicable
			3	h = 30 - 50 mm	within 7 days	
			4	h > 50 mm or > 20% joints	Strengthen subgrade. Reinstate pavement at normal level	

			5	h > 100 mm	if L < 20 m. Within 30 days	
			0	Not discernible. h < 5	Short Term	Long Term
			0	mm	No action.	
			1	h = 5 - 15 mm	Follow up.	
16				h = 15 - 30 mm, Nos <20% joints	Install Signs to Warn Traffic within 7 days	scrabble
			3	h = 30 - 50 mm		
			4	h > 50 mm or > 20% joints	Stabilise subgrade. Reinstate pavement at normal level if length	
			5	h > 100 mm	< 20 m. Within 30 days	
17	Bump	h = vertical	0	h < 4 mm	No action	

		displacement from normal profile	1	h = 4 - 7 mm	Grind, in case of new construction within 7 days	Construction Limit for New Construction.
			3	h = 7 - 15 mm	Grind, in case of ongoing Maintenance within 15 days	Replace in case of new construction. Within 30days
			5	h > 15 mm	Full Depth Repair. Within 30 days	Full Depth Repair. Within 30days
				Nil, not discernible	Short Term	Long Term
			U	0 < 3mm	No action.	
18	Lane to f = difference of level	t = difference of	1	f = 3 - 10 mm	Spot repair of shoulder	
	-		2	f = 10 - 25 mm	within 7 days	
			3	f = 25 - 50 mm	Fill up shoulder	

			4	f = 50 - 75 mm	within 7 dayss	For any 100 m stretch			
			5	f > 75 mm		Reconstruct shoulder, if affecting 25% or more of stretch. Within 30days			
	Drainage								
		quantity of fines and water expelled through open joints and cracks Nos	0	not discernible	No Action				
			1 to 2		Repair cracks and joints Without delay.	Inspect and repair sub-drainage at			
19 Pumping	Pumping		3 to 4	appreciable/ Frequent 10 - 25%	Lift or jack slab within 30 days.	distressed sections and upstream.			
		Nos/100 m stretch	١ 5	abundant, crack development > 25%	Repair distressed pavement sections. Strengthen subgrade and subbase. Replace slab. Within 30 days				

20 Ponding d			()-2	No discernible problem	No action.	
	Ponding on slabs due to blockage of drains	3 to 4	Idrains hut water	Clean drains etc within 7 days, Follow up	Action required to stop water damaging	
			ן '	Ponding, accumulation of water observed	-do-	foundation within 30 days.

Table -3: Maintenance Criteria for Safety Related Items and Other Furniture Items:

Asset Type	Performance Parameter	L	evel of Service ((LOS)	Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
Highway		of safe st	Desirable Minimum Sight Distance (m)	Safe Stoppin	Monthly	Manual Measurement s with Odometer along with video/image backup	Removal of obstration hours, in case of some suitable measures such as marking, blinkers applied doubstruction.	of ovement of arliest striction boards traffic calming s transverse bar s, etc. shall be	IRC:SP 84-2014
Pavemen t Marking	Wear	<70% of	f marking remain	ing	D;	Visual Assessment as per Annexure-F of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect within 2 months	IRC:35- 2015

Asset Type	Performance Parameter	Le	evel of Ser	vice (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
	Day time Visibility	During expected life Service Time Cement Road - 130mcd/m²/lux Bituminous Road - 100mcd/m²/lux Initial and Minimum Performance for Dry Retro reflectivity during night time: Design (RL) Retro Speed Reflectivity (mcd/m²/lux) Initial Minimum (7 days) Threshold level (TL) & warranty		Monthly	As per Annexure-D of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35- 2015	
				-	As per Annexure-E of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015	
	Night Time Visibility			period required up to 2 years	Bi-Annually				
		Up to 65	200	80					
		65 - 100 250 120		1					
		Above 350 150 100							
		Night Vis	ibility und flectivity):	n Performance for der wet condition reflectivity: 100					

Asset Type	Performance Parameter		Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
		mcd/m²/lux Minimum Threshold Level: 50 mcd/m²/lux					
	Skid Resistance	Initial and Minimum performance for Skid Resistance:	Bi-Annually	As per Annexure-G of IRC:35-2015		Within 24 hours	IRC:35-2015
Road Signs	Shape and	Shape and Position as per IRC:67- 2012. Signboard should be clearly visible for the design speed of the section.		video/image backup	shape is damaged. Relocation as per requirement	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 15 Days in case of Gantry/Cantileve r Sign boards	IRC:67-2012
	Retro reflectivity	As per specifications in IRC:67-2012	Bi-Annually	0	hange of ignboard	48 hours in case of Mandatory Signs,	RC:67-2012

Asset Type	Performance Parameter		Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
				using Retro Reflectivity Measuring Device. In accordance with ASTM D 4956-09.		Cautionary and Informatory Signs (Single and Dual post signs) 1 Month in case of Gantry/Cantilev er Sign boards	
	IK ARN HAIGHT	As per IRC 86:1983 depending upon type of Kerb			Raising Kerb Height		RC 86:1983
Kerb	IK ARN PAINTING I	Functionality: Functioning of Kerb painting as intended	Daily	Visual with video/image backup	Kerb Repainting	Within 7-days	RC 35:2015
	Pavement Markers (Road	Numbers and Functionality as per specifications in IRC:SP:84-2014 and IRC:35-2015, unless specified in Schedule-B.	Daily	Counting	New Installation	Within 2 months	IRC:SP:84- 2014, IRC:35- 2015
Other Road		<u>Functionality:</u> Functioning of guardrail as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:SP:84- 2014
Furnitur e		<u>Functionality</u> : Functioning of Safety Barriers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84- 2014, IRC:119- 2015
		<u>Functionality:</u> Functioning of End Treatment as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84- 2014, IRC:119- 2015

Asset Type	Performance Parameter		Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
	Attoniiatore	<u>Functionality:</u> Functioning of Attenuators as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP-2014, IRC:119- 2015
	Guard Posts and Delineators	<u>Functionality:</u> Functioning of Guard Posts and Delineators as intended	Daily	Visual with video/image backup	Rectificatio n	Within 15 days	IRC: 79 - 1981
		Overhead sign structure shall be structurally adequate	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:67-2012
		<u>Functionality:</u> Functioning of Traffic Blinkers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84- 2014
		Illumination: Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	1	24 hours	IRC:SP:84- 2014
	Lights	No major failure in the lighting system	Daily	-	Rectification of failure	24 hours	IRC:SP:84- 2014
Highway Lighting	way	No minor failure in the lighting system	Monthly	-	Rectification of failure	8 hours	IRC:SP:84- 2014
System	Tall Diago	Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84- 2014
		No major/minor failure in the lighting system	Daily		Rectification of failure	8 hours	IRC:SP:84- 2014

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specification s and Standards
Trees and Plantatio		No obstruction due to trees		Visual with video/image backup	Removal of trees	Immediate	IRC:SP:84- 2014
median plantatio n	Deterioration in health of trees and	Health of plantation shall be as per requirement of specifications & instructions issued by Authority from time to time	Daily	Visual with video/image backup	Timely watering and treatment. Or Replacement of Trees and Bushes.	Within 90 days	IRC:SP:84- 2014
	Vegetation affecting sight line and road structures	Sight line shall be free from obstruction by vegetation	D 11	Visual with video/image backup	Removal of Trees	Immediate	IRC:SP 84- 2014
	Cleaning of toilets	-	Daily	-	-	Every 4 hours	
Areas	Defects in electrical, water and sanitary installations	-	Daily	_	Rectification	24 hours	

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measuremen t	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifica s and Standar	l
Other				-	Rectification	15 days	IRC:SP	84-
Project	Damage or det	erioration in Approach Roads,					2014	
Facilities		lities, truck lay-bys, bus-bays, bus-	Daily					
and		crossings, Traffic Aid Posts, Medical						
	Aid Posts and o	other works						
h roads								

Asset Type	Performanc e Parameter		Frequency of Measuremen t		Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
		85% of culvert normal flow area to available.	year (before and after	Engineer as per IRC SP: 35-1990 and recording of depth of silting and area of	and D/s of barrel before	before onset of monsoon	IRC 5-2015, IRC SP:40- 1993 and IRC SP:13- 2004
	Leak-proof expansion joints if any	No leakage through expansion joints	Bi-Annually	Physical inspection of expansion joints as per IRC SP: 35-1990 if any, for leakage strains on walls at joints.	Fixing with sealant suitably	30 days or before onset of rains whichever comes	IRC SP:40- 1993 and IRC SP:69-2011
Pipe/box/slab culverts	Structurall y sound	Spalling of concrete not more than 0.25 sqm Delamination of concrete not more than 0.25 sq.m. Cracks wider than 0.3 mm not more than 1m aggregate length	Bi-Annually	culvert as per IRC SP:35-1990 and	Repairs to spalling, cracking, delamination, rusting shall be followed as per IRC:SP:40-1993.	15 days	IRC SP 40- 1993 and MORTH Specification s clause 2800

	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sqm, damage to solid apron (concrete apron) not more than 1 sqm	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40- 1993 and IRC:SP:13- 2004.
Bridges including ROBs Flyover etc. as applicable	Riding quality or user comfort	No pothole in wearing coat on bridge deck	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC or wearing coat	15 days	MORT&H Specification 2811
Bridge -Super	Bumps	No bump at expansion joint	Daily	Visual inspection as per IRC SP:35- 1990	Repairs to BC on either side of expansion joints, profile correction course on approach slab in case of settlement to approach embankment	15 days	MORT&H Specification 3004.2 & 2811.
Structure Super	User safety (condition of crash barrier and guard rail)	No damaged or missing stretch of crash barrier or pedestrian hand railing	Daily	Visual inspection and detailed condition survey as per IRC SP: 35- 1990.	Repairs and replacement of safety barriers as the case may be	3days	IRC: 5-1998, IRC SP: 84- 2014 and IRC SP: 40- 1993.

reinforcem ent Spalling of concrete Delaminatio	Not more than 0.25 sq.m Not more than 0.50 sq.m Not more than 0.50 sq.m	Bi- Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out the repairs to affected concrete portion with epoxy mortar / concrete.	15 days	IRC SP: 40- 1993 and MORTH Specificatio n 1600.
Cracks wider than 0.30 mm	Not more than 1m total length	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting with epoxy mortar, investigating causes for cracks development and carry out necessary rehabilitation.	48 Hours	IRC SP: 40- 1993 and MORTH Specification 2800.
Rainwater seepage through deck slab	Leakage - nil	Quarterly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting of deck slab at leakage areas, waterproofing, repairs to drainage spouts	1 months	MORTH specifications 2600 & 2700.
Deflection due to permanent loads and	Within design limits.	Once in every 10 years for spans more	Load test method	Carry out major rehabilitation works on bridge to retain original design loads capacity	6 months	IRC SP: 51- 1999.

1	live loads		than 40 m				
ir de m	n briage leck due to	Frequency of vibrations shall not be more than 5 Hz	every 10	isensors or laser	Strengthening of super structure	4 months	AASHTO LRFD specifications
E	eakage in Expansion oints	No damage to elastomeric sealant compound in strip seal expansion joint, no leakage of rain water through expansion joint in case of buried and asphalt plug and copper strip joint.	Bi-Annually	NP: 35= 19911 11cing	Replace of seal in expansion joint	15 days	MORTH specifications 2600 and IRC SP: 40-1993.

	Debris and dust in strip seal expansion joint	No dust or debris in expansion joint gap.	Monthly	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Cleaning of expansion joint gaps thoroughly	3 days	MORTH specification s 2600 and IRC SP: 40-1993.
	Drainage spouts	No down take pipe missing/broken below soffit of the deck slab. No silt, debris, clogging of drainage spout collection chamber.	Monthly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Cleaning of drainage spouts thoroughly. Replacement of missing/broken down take pipes with a minimum pipe extension of 500mm below soffit of slab. Providing sealant around the drainage spout if any leakages observed.	3 days	MORTH specification 2700.
Bridge- substructure	Cracks/sp alling of concrete/ rusted steel	No cracks, spalling of concrete and rusted steel	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out repairs to substructure by grouting/guniting and micro concreting depending on type of defect noticed	30 days	IRC SP: 40- 1993 and MORTH specification 2800.

	Bearings	Delamination of bearing reinforcement not more than 5%, cracking or tearing of rubber not more than 2 locations per side, no rupture of reinforcement or rubber	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	In case of failure of even one bearing on any pier/abutment, all the bearings on that pier/abutment shall be replaced, in order to get uniform load transfer on to bearings.	3 months	MORTH specificatio n 2810 and IRC SP: 40-199.
Bridge Foundations	Scouring around foundatio ns	Scouring shall not be lower than maximum scour level for the bridge	Bi-Annually	Condition survey and visual inspection as per IRC SP:35-1990 using Mobile Bridge Inspection Unit. In case of doubt, use Underwater camera for inspection of deep wells in major Rivers.	Suitable protection works around pier/abutment	1 month	IRC SP: 40- 1993, IRC 83-2014, MORTH specificatio n 2500
	Protectio n works in good condition	Damaged of rough stone apron or bank revetment not more than 3	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35- 1990	Repairs to damaged aprons and pitching.	30 days after defect observatio n or 2	IRC: SP 40- 1993 and IRC:SP:13- 2004.

sq.m, damage to		weeks	
solid apron		before	
(concrete		onset of	
apron) not		rainy	
more than 1		season	
sq.m		whichever	
		is earlier.	

Note: Any Structure during the entire contract period which is found that does not complies with all requirements of this Table will be prepared, rehabilitated or even reconstructed under the scope of the contractor.

Table 4: Maintenance Criteria for Structures and Culverts:

Table 5: Maintenance Criteria for Hill Roads

In addition to above, for hill roads the following provisions for maintenance is also to done.

Hill Roads		
(i)	Damage to Retaining wall/ Breast wall	7 (Seven) days
(ii)	Landslides requiring clearance	12 (Twelve) hours
(iii)	Snow requiring clearance	24 (Twenty Four) hours

Note: For all tables 1 to 5 above, latest BIS & IRC standards (even those not indicated herewith) along with MoRTH specifications shall be binding for all maintenance activities.

A. Flexible Pavement

	Nature of Defect or deficiency	Time limit for repair/ rectification
(b)	Granular earth shoulders, side slopes, drains and	culverts
(i)	Variation by more than 1 % in the prescribed slope of camber/cross fall (shall not be less than the camber on the main carriageway)	7 (seven) days
(ii)	Edge drop at shoulders exceeding 40 mm	7 (seven) days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 (thirty) days
(iv)	Rain cuts/gullies in slope	7 (seven) days
(v)	Damage to or silting of culverts and side drains	7 (seven) days
(vi)	Desilting of drains in urban/semi- urban areas	24 (twenty four) hours
(vii)	Railing, parapets, crash barriers	7 (seven) days (Restore immediately if causing safety hazard)
(c)	Road side furniture including road sign and pave	ment marking
(i)	Damage to shape or position, poor visibility or loss of retro- reflectivity	48 (forty eight) hours
(ii)	Painting of km stone, railing, parapets, crash barriers	As and when required/ Once every year
(iii)	Damaged/missing signs road requiring replacement	7 (seven) days
(iv)	Damage to road mark ups	7 (seven) days
(d)	Road lighting	
(i)	Any major failure of the system	24 (twenty four) hours
(ii)	Faults and minor failures	8 (eight) hours
(e)	Trees and plantation	

	Nature of Defect or deficiency	Time limit for repair/ rectification
(i)	Obstruction in a minimum head- room of 5 m above carriageway or obstruction in visibility of road signs	24 (twenty four)hours
(ii)	Removal of fallen trees from carriageway	4 (four) hours
(iii)	Deterioration in health of trees and bushes	Timely watering and treatment
(iv)	Trees and bushes requiring replacement	30 (thirty) days
(v)	Removal of vegetation affecting sight line and road structures	15 (fifteen) days
(f)	Rest area	
(i)	Cleaning of toilets	Every 4 (four) hours
(ii)	Defects in electrical, water and sanitary installations	24 (twenty four) hours
(g)	[Toll Plaza]	
(h)	Other Project Facilities and Approach roads	
(i)	Damage in approach roads, pedestrian facilities, truck lay- byes, bus-bays, bus-shelters, cattle crossings, [Traffic Aid Posts, Medical Aid Posts] and service roads	15 (fifteen) days
(ii)	Damaged vehicles or debris on the road	4 (four) hours
(iii)	Malfunctioning of the mobile crane	4 (four) hours
Brid	ges	
(a)	Superstructure	
(i)	Any damage, cracks, spalling/scaling	within 48 (forty eight) hours
	Temporary measures	within 15 (fifteen) days or as
	Permanent measures	specified by the Authority's Engineer
(b)	Foundations	

	Nature of Defect or deficiency	Time limit for repair/ rectification
(i)	Scouring and/or cavitation	15 (fifteen) days
(c)	Piers, abutments, return walls and wing walls	
(i)	Cracks and damages including settlement and tilting, spalling, scaling	30 (thirty) days
(d)	Bearings (metallic) of bridges	
(i)	Deformation, damages, tilting or shifting of bearings	15 (fifteen) days Greasing of metallic bearings once in a year
(e)	Joints	
(i)	Malfunctioning of joints	15 (fifteen) days
(f)	Other items	
(i)	Deforming of pads in elastomeric bearings	7 (seven) days
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	3 (three) days
(iii)	Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days (immediately within 24 hours if posing danger to safety)
(iv)	Rain-cuts or erosion of banks of the side slopes of approaches	7 (seven) days
(v)	Damage to wearing coat	15 (fifteen) days
(vi)	Damage or deterioration in approach slabs, pitching, apron, toes, floor or guide bunds	30 (thirty) days
(vii)	Growth of vegetation affecting the structure or obstructing the waterway	15 (fifteen) days
(g)	Hill Roads	
(i)	Damage to retaining wall/breast wall	7 (seven) days
(ii)	Landslides requiring clearance	12 (twelve) hours
(iii)	Snow requiring clearance	24 (twenty four) hours

[Note: Where necessary, the Authority may modify the time limit for repair/rectification, or add to the nature of Defect or deficiency before issuing the bidding document, with the approval of the competent authority.]

Schedule - F

(See Clause 4.1 (vii)(a))

Applicable Permits

1. Applicable Permits

- (i) The Contractor shall obtain, as required under the Applicable Laws, the following Applicable Permits:
 - (a) Permission of the State Government for extraction of boulders from quarry;
 - (b) Permission of Village Panchayats and Pollution Control Board for installation of crushers;
 - (c) Licence for use of explosives;
 - (d) Permission of the State Government for drawing water from river/reservoir;
 - (e) Licence from inspector of factories or other competent Authority for setting up batching plant;
 - (f) Clearance of Pollution Control Board for setting up batching plant;
 - (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphalt plant;
 - (h) Permission of Village Panchayats and State Government for borrow earth; and
 - (i) Any other permits or clearances required under Applicable Laws.
- (ii) Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority in accordance with the provisions of this Agreement.

Schedule - G

(See Clauses 7.1 and 19.2)

Annex-I

(See Clause 7.1)

Annex-I: Form of Bank Guarantee

[Performance Security/Additional Performance Security]

To, Mana	ging Director, NHIDCL,
	nal Highways & Infrastructure Development Corporation Ltd.
(A)	[name and address of contractor] (hereinafter called the "Contractor") and [name and address of the authority], (hereinafter called the "Authority") have entered into an agreement (hereinafter called the "Agreement") for the Construction of 4-Lane Bridge over Irang River on Imphal- Jiribam road section (95.500Km) NH-37 (Old NH-53) in the State of Manipur on EPC mode (the "EPC") basis, subject to and in accordance with the provisions of the Agreement
(B)	The Agreement requires the Contractor to furnish a Performance Security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the {Construction Period/ Defects Liability Period and Maintenance Period} (as defined in the Agreement) in a sum of Rs cr. (Rupees crore) (the "Guarantee Amount").
(C)	We, through our branch at (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") by way of Performance Security.
NIOTAI	MATERIAL DE LA LA LIVE DE LA

- NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:
- 1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor's obligations during the {Construction Period/ Defects Liability Period and Maintenance Period} under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
- 2. A letter from the Authority, under the hand of an officer not below the rank of General Manager in the National Highways & Infrastructure Development Corporation Ltd., that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of

its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

- 3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
- 4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
- 5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Contractor contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
- 6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfillment, compliance and/or performance of all or any of the obligations of the Contractor under the Agreement.
- 7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
- 8. The Guarantee shall cease to be in force and effect on ****\$. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.

^{\$} Insert date being 2 (two) years from the date of issuance of this Guarantee (in accordance with Clause 7.2 of the Agreement).

- 9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
- 10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
- 11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
- 13. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHIDCL, details of which is as under:

Sl. No	Particulars	Details
1	Name of the Beneficiary	National Highways and Infrastructure Development Corporation Limited
2	Beneficiary Bank Account No.	90621010002659
3	Beneficiary Bank Branch	IFSC SYNB0009062
4	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5	Beneficiary Bank Address	Syndicate Bank, Transport Bhawan, 1st Parliament street, New Delhi-110001

Signed and sealed this day of, 20...... at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

(i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.

(ii)	The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex - II

(Schedule - G)

(See Clause 19.2)

Annex-IIForm for Guarantee for Advance Payment

To,
Managing Director, NHIDCL,
National Highways & Infrastructure Development Corporation Ltd.
WHEREAS:

- (A) [name and address of contractor] (hereinafter called the "Contractor") has executed an agreement (hereinafter called the "Agreement") with the [name and address of the authority], (hereinafter called the "Authority") for the Construction of 4-Lane Bridge over Irang River on Imphal- Jiribam road section (95.500Km) NH-37 (Old NH-53) in the State of Manipur on EPC mode (the "EPC") basis, subject to and in accordance with the provisions of the Agreement
- (C) We, through our branch at (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

A letter from the Authority, under the hand of an officer not below the rank of General

^{\$} The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment.

Manager in the National Highways & Infrastructure Development Corporation Ltd., that the Contractor has committed default in the due and faithful performance of all or any of its obligations for the repayment of the instalment of the Advance Payment under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

- In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
- 3 It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
- The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
- 5. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Advance Payment.
- Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
- 7. The Guarantee shall cease to be in force and effect on ****.\$ Unless a demand or claim

^{\$} Insert a date being 90 (ninety) days after the end of one year from the date of payment of the

- under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.
- 8 The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
- 9. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
- 10. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
- 12. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHIDCL, details of which is as under:

Sl. No	Particulars	Details
1	Name of the Beneficiary	National Highways and Infrastructure Development Corporation Limited
2	Beneficiary Bank Account No.	90621010002659
3	Beneficiary Bank Branch	IFSC SYNB0009062
4	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5	Beneficiary Bank Address	Syndicate Bank, Transport Bhawan, 1st Parliament street, New Delhi-110001

Signed and sealed this	day of	, 20	at
SIGNED, SEALED AND DE	LIVERED		
For and on hehalf of the F	Rank hv		

(Signature)
(Name)
(Designation)
(Code Number)
(Address)
NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

\$ Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).

SCHEDULE - H

See Clauses 10.1 (iv) and 19.3

Contract Price Weightages

The Contract Price for this Agreement is Rs. ******

Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

Item	Weightage	in	Stage for Payment	Percentage
	percentage the Contract	to		weightage
	Price			
1	2		3	4
Road works	[*****]		A- Widening and	
including			strengthening of existing	
culverts,			road	
widening and				
repair of			(1) Earthwork up to top of	[**]
culverts.			the sub-grade	
			(2) <u>Sub-Base Course</u>	[**]
			(3) Non Bituminous Base Course	[**]
			(4) <u>Bituminous Base</u>	[**]
			Course	[**]
			(5) Wearing Coat	. ,
			(6) Widening and repair of culverts	[**]
			B.1- Reconstruction/ New	
			2-lane realignment/	
			bypass (Flexible	
			pavement)	
			(1) Earthwork up to top of	[**]
			the sub-grade	[**]
			(2) <u>Sub Base Course</u>	[**]
			(3) Non-Bituminous Base	
			Course	[**]
			(4) Bituminous Base	
			Course	

Item	Weightage in percentage to the Contract Price		Stage for Payment	Percentage weightage
1	2		3	4
			(5) Wearing Coat B.2- Reconstruction/ New 2-lane realignment/ bypass(Rigid Pavement)	[**]
			 (1) Earthwork up to top of the sub-grade (2) Sub Base Course (3) Dry Lean Concrete(DLC) Course (4) Pavement Quality Control (PQC) Course 	[**] [**] [**]
			C.1- Reconstruction/ New service road (Flexible pavement)	
			(1) Earthwork up to top of the sub-grade (2)Sub Base Course	[**]
			(3) Non-Bituminous Base Course	[**] [**]
			(4) Bituminous Base Course	[**]
			(5) Wearing Coat	[**]
			C.2- Reconstruction/ New Service road (Rigid Pavement)	
			(1) Earthwork up to top of the sub-grade (2) Sub Base Course (3) Dry Lean Concrete(DLC) Course (4) Pavement Quality Control (PQC) Course	[**] [**] [**]

Item	Weightage percentage the Contract Price	in to	Stage for Payment	Percentage weightage
1	2		3	4
			D- Re-Construction and New culverts on existing road, realignments, bypasses:	[**]
			Culverts (length < 6 m)	LJ
Minor Bridges/ Underpasses/ Overpasses	[****]		A.1- Widening and Repair of Minor bridges (length > 6 m and < 60 m)	
			Minor bridges A.2- New Minor bridges (length >6 and <60 m.) (1) Foundation +Sub- Structure: On completion of	[**]
			the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.	[**]
			(2) Super-structure: On completion of the super-structure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs & markings, tests on completion etc. complete in all respect.	[**]
			(3) Approaches : On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use.	[**]

Item		in to	Stage for Payment	Percentage weightage
1	2		3	4
			(4) Guide Bunds and River Training Works:	[**]
			On completion of Guide Bunds and river Training Works complete in all respects	
			B.1- Widening and Repair of underpasses/ overpasses	
			Underpasses/ Overpasses	[**]
			B.2- New underpasses/ overpasses	
			(1) Foundation +Sub-Structure: On completion of the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.	[**]
			(2) Super-structure: On completion of the super-structure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs & markings, tests on completion etc. complete in all respect.	
			Wearing Coat (a) in case of Overpass- wearing coat including expansion joints complete in all respects as specified and (b) in case of underpass- rigid pavement	

Item	Weightage in percentage to the Contract		Percentage weightage
	Price		
1	2	3	4
		including drainage facility complete in all respects as specified as specified.	[**]
		(3) Approaches : On completion of approaches	
		including Retaining walls/ Reinforced Earth walls, stone	
		pitching, protection works complete in all respect and fit for use.	
Major		A.1- Widening and	
Bridge(length		repairs of Major Bridges	
> 60 m.)		(1) Foundation	[**]
works and		(2) Sub-structure	[**]
ROB/RUB/		(3) Super-structure	[**]
elevated		(including bearings)	
sections/flyov		(4) Wearing Coat including	[**]
ers including		expansion joints	5.1.3
viaducts, if		(5) Miscellaneous Items	[**]
any		like hand rails, crash	
		barriers, road markings etc.)	
		(6) Wing walls/return walls	[**]
		(7) Guide Bunds, River	[**]
		Training works etc. (8) Approaches (including Retaining walls, stone pitching and protection	[**]
		works)	
	100	A.2- New Major Bridges	32.236
		(1) Foundation	16.556
		(2) Sub-structure	10.550
		(3)Super-structure (including bearings)	35.871
		(4) Wearing Coat including	
		expansion joints	
		(5) Miscellaneous Items	2.044

Item	Weightage	in	Stage for Payment	Percentage
	percentage to the Contract			weightage
	Price			
1	2		3	4
			like hand rails, crash	
			barriers, road markings	1.640
			etc.) (6) Wing walls/return walls	[**]
			(7) Guide Bunds, River	[**]
			Training works etc.	LJ
			(8) Approaches (including	11.653
			Retaining walls, stone	
			pitching and protection	
			works)	
			B.1- Widening and repair	
			of	
			ROB	Eduta
			RUB (1) Foundation	[**] [**]
			(2) Sub-structure	[**]
			(3) Super-structure	2 3
			(including bearings)	[**]
				[]
			(4) Wearing Coat: (a) in	
			case of ROB- wearing coat including expansion joints	
			complete in all respects as	
			specified and (b) in case of	
			RUB- rigid pavement under	
			RUB including drainage	
			facility complete in all respects as specified as	
			specified.	[**]
			(5) Missollensons Items	
			(5) Miscellaneous Items like hand rails, crash	
			barriers, road markings	[**]
			etc.)	
			(6) Wing walls/return walls	[**]
			(7) Approaches (including	
			Retaining walls, stone	
			pitching and protection	

Item	Weightage in percentage to the Contract Price		Stage for Payment	Percentage weightage	
1	2		3	4	
			works)		
			B.2- New ROB/RUB (a)ROB	[**]	
			(b) RUB	[**]	
			(1) Foundation	[**]	
			(2) Sub-structure		
			(3) Super-structure (including bearings)	[**]	
			(4) Wearing Coat: (a) in case of ROB- wearing coat including expansion joints complete in all respects as specified and (b) in case of RUB- rigid pavement under RUB including drainage facility complete in all respects as specified as specified.	[**]	
			(5) Miscellaneous Items like hand rails, crash barriers, road markings	[**]	
			etc.) (6) Wing walls/return walls (7) Approaches (including Retaining walls/Reinforced Earth wall, stone pitching and protection works)	[**]	
			C.1- Widening and repair of Elevated		
			Section/Flyovers/ Grade Separators	[**] [**] [**]	
			(1) Foundation(2) Sub-structure	[**]	
			(3) Super-structure(including bearings)(4) Wearing Coat including	[**]	

Item	Weightage in	Stage for Payment	Percentage
	percentage to the Contract		weightage
	Price		
1	2	3	4
		expansion joints	
		(5) Miscellaneous Items	[**]
		like hand rails, crash	[**]
		barriers, road markings	LJ
		etc.)	
		(6) Wing walls/return walls	
		(7) Approaches (including	
		Retaining walls/Reinforced	
		Earth wall, stone pitching and protection works)	
		and protection works)	[**]
		C.2-New Elevated	[**]
		Section/Flyovers/ Grade	[**]
		Separators	
		(1) Foundation	[**]
		(2) Sub-structure	L J
		(3) Super-structure	
		(including bearings)	[**]
		(4) Wearing Coat including	
		expansion joints	
		(5) Miscellaneous Items	[**]
		like hand rails, crash	[**]
		barriers, road markings	
		etc.)	
		(6) Wing walls/return walls	
		(7) Approaches (including	
		Retaining walls/Reinforced	
		Earth wall, stone pitching	
Otherwale	Γ*****1	and protection works)	Γ**1
Other works	[****]	(i) Toll Plaza (ii) Road side drains	[**] [**]
	Dug h	(iii) Road signs,	[**]
	Bus bays	markings, km stones,	[**]
	Truck low byon	safety devices,	
	Truck lay-byes	(iv) Duningt for the con-	
	Rest areas	(iv) Project facilities Bus Bays	[**]
	Rest areas	Truck lay-byes	[**]
	d) others	Rest areas	[**]
	<i>a,</i> oniois	others	[**]
		Omers	[**]

Item	Weightage percentage the Contract Price	in to	Stage for Payment	Percentage weightage
1	2		3	4
			(v) Road side plantation (vi) Repair of protection works other than approaches to the bridges, elevated sections/flyovers/grade separators and ROBs/RUBs. (vii) Safety and traffic management during construction	[**]

Procedure of estimating the value of work done

Road works.

Procedure for estimating the value of road work done shall be as follows:

Table 1.3.1

Stage of Payment	Percentage -weightage	Payment Procedure
A-Widening and strengthening of existing road 1) Earthwork up to top of the sub-grade 2) Sub-Base Course	[**]	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in a length of not less than 10 (ten) percent of the total length.
3) Non Bituminous Base Course	[**]	
4) <u>Bituminous Base Course</u> (5) <u>Wearing Coat</u>	[**]	

Stage of Payment	Percentage -weightage	Payment Procedure
(6) Widening and repair of culverts	[**]	Cost of completed culverts shall be determined pro rata basis with respect to the total no. of culverts. The payment shall be made on the completion of atleast five culverts.
B.1- Reconstruction/New 2-lane realignment/bypass		
(Flexible pavement)		
(1) Earthwork up to top of the sub-grade	[**]	Unit of measurement is linear length. Payment of each stage shall be made on
(2) <u>Sub Base Course</u>	[**]	pro rata basis on completion of a stage in full length or 5(five) km. length, whichever is less.
(3) Non-Bituminous Course	[**]	is less.
(4) Bituminous Base Course	[**]	
(5) Wearing Coat	[**]	
B.2- Reconstruction/New		
2-lane realignment/bypass (Rigid pavement)		
(1) Earthwork up to top of		
the sub-grade	[**]	Unit of measurement is linear length. Payment of each stage shall be made on
(2) Sub Base Course	[**]	pro rata basis on completion of a stage in full length or 5(five) km. length, whichever
(3) Dry Lean Concrete (DLC) Course	[**]	is less
(4) Pavement Quality Control (PQC) Course	[**]	

Stage of Payment	Percentage -weightage	Payment Procedure
C.1- Reconstruction/ New service road (Flexible pavement) (1) Earthwork up to top of the sub-grade (2) Sub Base Course (3) Non-Bituminous Course (4) Bituminous Base Course	[**] [**] [**]	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5(five) km. length, whichever is less
(5) Wearing Coat C.2- Reconstruction/ New service road (Rigid pavement) (1) Earthwork up to top of the sub-grade (2) Sub Base Course	[**]	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 5(five) km. length, whichever is less
(3) Dry Lean Concrete (DLC) Course (4) Pavement Quality Control (PQC) Course	[**]	
D- Re-Construction and New culverts on existing road, realignments, bypasses: (1) Culverts (length < 6m)	[**]	Cost of each culvert shall be determined on pro rata basis with respect to the total number of culverts. Payment shall be made on the completion of atleast five culverts.

@. For example, if the total length of bituminous work to be done is 100 km, the cost per km of bituminous work shall be determined as follows:

Cost per km = P x weightage for road work x weightage for bituminous work x (1/L)

Where P= Contract Price

L = Total length in km

Similarly, the rates per km for other stages shall be worked out accordingly.

Note: The length affected due to law and order problems or litigation during execution including the length not handed over to the Contractor under clause 8.3 of this Contract Agreement due to which the Contractor is unable to execute the work, may be deducted from the total project length for payment purposes. The total length calculated here is only for payment purposes and will not affect and referred in other clauses of the Contract Agreement

Minor Bridges and Underpasses/Overpasses.

Procedure for estimating the value of Minor bridge and Underpasses/Overpasses shall be as stated in table 1.3.2:

Table 1.3.2

Stage of Payment	Weightage	Payment Procedure
1	2	3
A.1-Widening and repair of minor bridges (length > 6m and < 60m)	[**]	Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear
		length of the minor bridges. Payment shall be made on the completion of widening & repair works of a minor bridge.
A.2- New minor bridges		
(i) Foundation + Sub-Structure: On completion of the foundation work including foundations for wing and return walls, abutments,	[**]	(i) Foundation +Sub- Structure: Cost of each minor bridge shall be determined on pro rata basis with respect to
piers upto the abutment/pier cap.		the total linear length (m) of the minor bridges. Payment against foundation + sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation +sub-structure of each bridge subject to completion of atleast two
(ii) Super-structure: On	[**]	foundations along with sub- structure upto abutment/pier cap level of each bridge.
completion of the super-structure in all respects including wearing coat, bearings, expansion joints, hand		In case where load testing is required for foundation, the trigger of first payment shall
rails, crash barriers, road signs & markings, tests on completion etc. complete in all respect.	[**]	include load testing also where specified. (ii) Super-structure: Payment shall be made on pro-
(iii) Approaches : On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use.	[**]	rata basis on completion of a stage i.e. completion of super-structure of atleast one span in all respects as specified in the column of "Stage of Payment" in this sub-clause.
(iv) Guide Bunds and River Training Works: On completion of Guide Bunds and river Training Works complete in all respects		(iii) Approaches: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of approaches in all respect as specified in the column of "Stage of Payment" in this sub-clause.

		(iv) Guide Bunds and River Training Works: Payment shall be made on prorata basis on completion of a stage i.e. completion of Guide
		Bunds and River training Works in all respects as specified.
B.1-Widening and repair of underpasses/overpasses	[**]	Cost of each underpass/overpass shall be determined on pro rata basis with respect to the total linear length of the underpasses/overpasses. Payment shall be made on the completion of widening & repair works of a underpass/overpass.
B.2- New Underpasses/		
Overpasses: (i) Foundation +Sub-Structure: On completion of the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.	[**]	(i) Foundation +Sub- Structure: Cost of each Underpass/Overpass shall be determined on pro rata basis with respect to the total linear length (m) of the Underpasses/Overpasses. Payment against foundation + sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation +sub-structure of each Underpasses/Overpasses subject to completion of atleast two foundations along with sub-structure upto
(ii) Super-structure: On completion of the super-structure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs &markings, tests on completion etc. complete in all respect.		abutment/pier cap level each underpass/overpass. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
Wearing Coat (a) in case of Overpass- wearing coat including expansion joints complete in all respects as specified and (b) in case	[**]	(ii) Super-structure: Payment shall be made on prorata basis on completion of a stage i.e. completion of super-

of underpass- rigid pavement including drainage facility complete in all respects as specified as	structure of atleast one span in all respects as specified in the column of "Stage of Payment"
specified. (iii) Approaches : On completion of approaches including Retaining walls/ Reinforced Earth walls, stone pitching, protection works complete in all respect and fit for use.	(iii) Approaches: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of approaches in all respect as specified.

Major Bridge works, ROB/RUB and Structures.

Procedure for estimating the value of Major Bridge works, ROB/RUB and Structures shall be as stated in table 1.3.3:

Table 1.3.3

Stage of Payment	Weightage	Payment Procedure
1	2	3
A.1- Widening and repairs of		
Major Bridges	[**]	(i) Foundation: Cost of each
(i) Foundation		Major Bridge shall be
		determined on pro rata basis
		with respect to the total linear
		length (m) of the Major Bridge.
		Payment against foundation
		shall be made on pro-rata basis
		on completion of a stage i.e.
		not less than 25% of the scope
		of foundation of the major
		Bridge subject to completion of
		atleast two foundations of the
		major Bridge .
(ii) Sub-structure	[**]	
		In case where load testing is
		required for foundation, the
		trigger of first payment shall
		include load testing also where
		specified.
		(ii) Sub-Structure:. Payment
(iii) Super structure (including		against Sub-structure shall be
(iii) Super-structure (including	[**]	made on pro-rata basis on
bearings)		completion of a stage i.e. not
		less than 25% of the scope of
		sub-structure of the major
		bridge subject to completion
(iv) Wearing Coat including	[**]	of atleast two sub-structures of
expansion joints		abutments/piers upto
•		abutment/pier cap level of the
		major bridge.
(v) Miscellaneous Items like hand	[**]	(iii) Super-structure:
rails, crash barriers, road markings	[]	Payment shall be made on pro-
etc.		rata basis on completion of a
		stage i.e. completion of super-
	Edula	structure including bearings of
	[**]	atleast one span in all respects
(vi) Wing walls/return walls		as specified.
		·
, m, a	[**]	(iv) Wearing Coat: Payment
(vii) Guide Bunds, River Training		shall be made on completion of
works etc.		wearing coat including
		expansion joints complete in all
	[**]	respects as specified.

		(v) Miscellaneous: Payments
(viii) Approaches (including		shall be made on completion of
Retaining walls, stone pitching and		all miscellaneous works like
protection works)		hand rails, crash barriers, road
		markings etc. complete in all
		respects as specified.
		(vi) Wing walls/return walls:
		Payments shall be made on
		completion of all wing
		walls/return walls complete in
		all respects as specified.
		(vii) Guide Bunds, River
		Training works: Payments
		shall be made on completion of
		all guide bunds/river training
		works etc. complete in all
		respects as specified.
		(viii) Approaches : Payments
		shall be made on completion of
		both approaches including
		stone pitching, protection
		works, etc. complete in all
		respects as specified.
A.2- New Major Bridges		(i) Foundation: Cost of each
(i) Foundation	32.236 %	Major Bridge shall be
(i) Foundation	32.236 %	
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e.
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge.
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the
(i) Foundation	32.236 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall
(ii) Foundation (ii) Sub-structure	32.236 % 16.556 %	Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
		Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified. (ii) Sub-Structure: Payment
		Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified. (ii) Sub-Structure: Payment against Sub-structure shall be
		Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of atleast two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified. (ii) Sub-Structure: Payment

		less than 25% of the scope of sub-structure of the major bridge subject to completion of atleast two sub-structures of abutments/piers upto abutment/pier cap level of the major bridge.
(iii) Super-structure (including bearings)	35.871 %	(iii) Super-structure: Payment shall be made on prorata basis on completion of a stage i.e. completion of super-structure including bearings of atleast one span in all respects as specified.
(iv) Wearing Coat including expansion joints	2.044 %	(iv) Wearing Coat: Payment shall be made on completion of wearing coat including expansion joints complete in all respects as specified.
(v) Miscellaneous Items like hand rails, crash barriers, road markings etc.	1.640 %	(v) Miscellaneous: Payments shall be made on completion of all miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respects as specified.
(vi) Wing walls/return walls	0.00 %	(vi) Wing walls/return walls: Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.
(vii) Guide Bunds, River Training works etc.	0.00 %	(vii) Guide Bunds, River Training works: Payments shall be made on completion of all guide bunds/river training works etc. complete in all respects as specified.
(viii) Approaches (including Retaining walls, stone pitching and protection works)	11.653 %	(viii) Approaches : Payments shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all

		respects as specified.
B.1 -Widening and repairs of		(i) Foundation: Cost of each
ROB		ROB/RUB shall be determined
RUB	[**]	on pro rata basis with respect to
i) Foundation	. ,	the total linear length (m) of the
		ROBs/RUBs. Payment against
		foundation shall be made on
		pro-rata basis on completion of
		a stage i.e. not less than 25% of
		the scope of foundation of the
		ROB/RUB subject to
		completion of atleast two
		foundations of the ROB/RUB.
		In case where load testing is
::\ Cub atmatuma		required for foundation, the
ii) Sub-structure	[**]	trigger of first payment shall
		include load testing also where
		specified.
		(ii) Sub-Structure: Payment
		against Sub-structure shall be
iii) Super-structure (including		made on pro-rata basis on
pearings)	[**]	completion of a stage i.e. not
bearings)		less than 25% of the scope of
		sub-structure of the ROB/RUB
		subject to completion of atleast
		two sub-structures of
iv) Wearing Coat including	[**]	abutments/piers upto
expansion joints in case of ROB. In	. ,	abutment/pier cap level of the ROB/RUB.
case of RUB, rigid pavement under		
RUB including drainage facility as		(iii) Super-structure:
specified.	Γ * *1	Payment shall be made on pro-
	[**]	rata basis on completion of a stage i.e. completion of super-
		structure including bearings of
v) Miscellaneous Items like hand		atleast one span in all respects
ails, crash barriers, road markings		as specified.
etc.	[**]	(iv) Wearing Coat: Payment
		shall be made on completion of
		(a) in case of ROB- wearing
vi) Wing walls/return walls	[**]	coat including expansion joints
, 2	r j	complete in all respects as
		specified and (b) in case of
		RUB- rigid pavement under
		RUB including drainage
		facility complete in all respects
vii) Approaches (including		as specified as specified.
Retaining walls, stone pitching and		(v) Miscellaneous: Payments
<i>5</i> , 1		(v) iviiscentaneous. Fayineits

rotection works)		shall be made on completion of
Totection works)		all miscellaneous works like
		hand rails, crash barriers, road
		markings etc. complete in all
		respects as specified.
		(vi) Wing walls/return walls:
		Payments shall be made on
		completion of all wing
		walls/return walls complete in
		all respects as specified.
		(vii) Approaches : Payments
		shall be made on completion of
		both approaches including
		stone pitching, protection
		works, etc. complete in all
		respects as specified.
B.2- New		
OB		
UB		
i) Foundation	[**]	(i) Foundation: Cost of each
		ROB/RUB shall be determined
		on pro rata basis with respect to
		the total linear length (m) of the
		ROBs/RUBs. Payment against
		foundation shall be made on
		pro-rata basis on completion of
		a stage i.e. not less than 25% of
		the scope of foundation of the
		ROB/RUB subject to
		J
		completion of atleast two
ii) Sub-structure	[**]	foundations of the ROB/RUB.
n) Sub-structure		
		In case where load testing is
		required for foundation, the
		trigger of first payment shall
		include load testing also where
		specified.
		(ii) Sub-Structure:. Payment
iii) Super-structure (including	[**]	against Sub-structure shall be
earings)		made on pro-rata basis on
		completion of a stage i.e. not
		less than 25% of the scope of
		sub-structure of the ROB/RUB
		subject to completion of atleast
iv) Wearing Coat including		two sub-structures of
expansion joints in case of ROB. In	[**]	
case of RUB, rigid pavement under	L J	
Table of Red, fight pavement under		abutment/pier cap level of the

RUB including drainage facility as		ROB/RUB.
specified.		(iii) Super-structure:
7-7-11-0-1		Payment shall be made on pro-
		rata basis on completion of a
		stage i.e. completion of super-
	[**]	structure including bearings of
v) Miscellaneous Items like hand		atleast one span in all respects
		as specified.
ails, crash barriers, road markings	[**]	as specified.
etc.	LJ	(iv) Wasning Costs Daymont
		(iv) Wearing Coat: Payment
'\ XX' 11 / 4 11		shall be made on completion of
vi) Wing walls/return walls		(a) in case of ROB- wearing
		coat including expansion joints
	[**]	complete in all respects as
		specified and (b) in case of
(vii) Approaches (including		RUB- rigid pavement under
Retaining walls/Reinforced Earth		RUB including drainage
wall, stone pitching and protection		facility complete in all respects
works)		as specified as specified.
		(v) Miscellaneous: Payments
		shall be made on completion of
		all miscellaneous works like
		hand rails, crash barriers, road
		markings etc. complete in all
		respects as specified.
		(vi) Wing walls/return walls:
		Payments shall be made on
		completion of all wing
		walls/return walls complete in
		all respects as specified.
		(vii) Anneaghas Daymanta
		(vii) Approaches : Payments
		shall be made on completion of
		both approaches including
		stone pitching, protection
		works, etc. complete in all
C1 Widening and vencing of		respects as specified.
C.1- Widening and repairs of		
Elevated Section/Flyovers/ Grade		
Separators		(i) Foundation: Cost of sock
(i) Foundation	[**]	(i) Foundation: Cost of each
(i) Foundation		structure shall be determined
		on pro rata basis with respect to
		the total linear length (m) of the
		structures. Payment against

(ii) Sub-structure	[**]	foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the structure subject to completion of atleast two foundations of the structure. In case where load testing is required for foundation, the trigger of first payment shall
(iii) Super-structure (including bearings)	[**]	include load testing also where specified. (ii) Sub-Structure: Payment against Sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of sub-structure of the structure subject to completion of atleast
(iv) Wearing Coat including expansion joints	[**]	two sub-structures of abutments/piers upto abutment/pier cap level of the structure.
(v) Miscellaneous Items like hand rails, crash barriers, road markings etc.	[**]	(iii) Super-structure: Payment shall be made on prorata basis on completion of a stage i.e. completion of super-structure including bearings of atleast one span in all respects
(vi) Wing walls/return walls	[**]	as specified. (iv) Wearing Coat: Payment
(vii) Approaches (including Retaining walls/Reinforced Earth wall, stone pitching and protection works)	[**]	shall be made on completion of wearing coat including expansion joints complete in all respects as specified. (v) Miscellaneous: Payments shall be made on completion of all miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respects as specified.
		(vi) Wing walls/return walls: Payments shall be made on

		completion of all wing walls/return walls complete in all respects as specified. (vii) Approaches: Payments shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
C.2 -New Elevated Section/Flyovers/ Grade		
Separators (i) Foundation	[**]	(i) Foundation: Cost of each structure shall be determined on pro rata basis with respect to the total linear length (m) of the structures. Payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the structure subject to completion of atleast two foundations of the structure.
(ii) Sub-structure	[**]	In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(iii) Super-structure (including bearings)	[**]	(ii) Sub-Structure:. Payment against Sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of sub-structure of the structure subject to completion of atleast two sub-structures of
(iv) Wearing Coat including expansion joints	[**]	abutments/piers upto abutment/pier cap level of the structure.
(v) Miscellaneous Items like hand rails, crash barriers, road markings etc.	[**]	(iii) Super-structure: Payment shall be made on prorata basis on completion of a stage i.e. completion of super-

(vi) Wing walls/return walls	[**]	structure including bearings of atleast one span in all respects as specified. (iv) Wearing Coat: Payment
(vii) Approaches (including Retaining walls/Reinforced	[**]	shall be made on completion of wearing coat including expansion joints complete in all respects as specified.
Earth wall, stone pitching and protection works)		(v) Miscellaneous: Payments shall be made on completion of all miscellaneous works like hand rails, crash barriers, road markings etc. complete in all respects as specified.
		(vi) Wing walls/return walls: Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.
		(vii) Approaches: Payments shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.

- Note: (1) In case of innovate Major Bridge projects like cable suspension/cable stayed/ Extra Dozed and exceptionally long span bridges, the schedule may be modified as per site requirements before bidding with due approval of Competent Authority.
 - (2) The Schedule for exclusive tunnel projects may be prepared as per site requirements before bidding with due approval of Competent Authority.

Other works.

Procedure for estimating the value of other works done shall be as stated in table 1.3.4.

Table 1.3.4

Stage of Payment	Weightage	Payment Procedure
(i) Toll plaza	[**]	Unit of measurement is each completed toll plaza. Payment of each toll plaza shall be made on pro rata basis with respect to the total of all toll plazas.
(ii) Road side drains	[**]	Unit of measurement is linear length in km. Payment shall be made on pro rata
(iii) Road signs, markings, km stones, safety devices,	[**]	basis on completion of a stage in a length of not less than 10 % (ten per cent) of the total length.
(iv) Project Facilities d) Bus bays e) Truck lay-byes f) Rest areas d) others	[**] [**] [**]	Payment shall be made on pro rata basis for completed facilities.
(v) Roadside plantation	[**]	Unit of measurement is linear length.
(vi) Repair of protection works other than approaches to the bridges, elevated sections/ flyovers/grade separators and ROBs/RUBs.	[**]	Payment shall be made on pro rata basis on completion of a stage in a length of not less than 10% (ten per cent) of the total length.
(vii) Safety and traffic management during construction	[**]	Payment shall be made on prorata basis every six months.

2. Procedure for payment for Maintenance

The cost for maintenance shall be as stated in Clause 14.1.1.

Payment for Maintenance shall be made in quarterly instalments in accordance with the provisions of Clause 19.7.

Schedule - I

(See Clause 10.2 (iv))

Drawings

1. Drawings

In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

2. Additional Drawings

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.

Annex - I

(Schedule - I)

List of Drawings

[Note: The Authority shall describe in this Annex-I, all the Drawings that the Contractor is required to furnish under Clause 10.2.]

Schedule - J

(See Clause 10.3 (ii))

Project Completion Schedule

1. Project Completion Schedule

During Construction period, the Contractor shall comply with the requirements set forth in this Schedule-J for each of the Project Milestones and the **Scheduled Completion Date**. Within 15 (fifteen) days of the date of each Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

2. Project Milestone-I

- (i) Project Milestone-I shall occur on the date falling on the **225**th day from the Appointed Date (the "**Project Milestone-I**").
- (ii) Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for anamount not less than 10% (ten per cent) of the Contract Price.

3. Project Milestone-II

- (i) Project Milestone-II shall occur on the date falling on the **390**th day from the Appointed Date (the "**Project Milestone-II**").
- (ii) Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 35% (thirty five per cent) of the Contract Price and should have started construction of all bridges

4. Project Milestone-III

- (i) Project Milestone-III shall occur on the date falling on the **550**th day from the Appointed Date (the "**Project Milestone-III**").
- (ii) Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for anamount not less than 70% (seventy per cent) of the Contract Price and **should have** started construction of all project facilities.

5. Scheduled Completion Date

- (i) The Scheduled Completion Date shall occur on the **650**th day from the Appointed Date.
- (ii) On or before the Scheduled Completion Date, the Contractor shall have completed construction in accordance with this Agreement.

6. Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

Schedule - K

(See Clause 12.1 (ii))

Tests on Completion

1. Schedule for Tests

- (i) The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10(ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- (ii) The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule-K.

2. Tests

- (i) Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include [***].
- (ii) Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a Network Survey Vehicle (NSV) fitted with latest equipments and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometre.
- (iii) Tests for bridges: All major and minor bridges shall be subjected to the rebound hammer and ultrasonic pulse velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Nondestructive Testing Techniques, at two spots in every span, to be chosen at random by the Authority's Engineer. Bridges with a span of 15 (fifteen) metres or more shall also be subjected to load testing.
- (iv) Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with Good Industry Practice, for determining the compliance of the Project Highway with Specifications and Standards, except tests as specified in clause 5,but shall include measuring the reflectivity of road markings and road signs; and measuring the illumination level (lux) of lighting using requisite testing equipment.

- (v) Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- (vi) Safety Audit: The Authority's Engineer shall carry out, or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

3. Agency for conducting Tests

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

4. Completion Certificate

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

5. The Authority Engineer will carry out tests with following equipment at his own cost in the presence of contractor's representative.

Sr. No.	Key metrics of Asset	Equipment to be used	Frequency of condition survey
1	Surface defects of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
2	Roughness of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
3	Strength of pavement	Falling Weight Deflectometer (FWD)	At least once a year
4	Bridges	Mobile Bridge Inspection Unit (MBU)	At least twice a year (As per survey months defined for the state basis rainy season)
5	Road signs	Retro-reflectometer	At least twice a year (As per survey months defined for the state basis rainy season)

The first testing with the help of NSV shall be conducted at the time of issue of Completion Certificate.

Schedule - L

(See Clause 12.2)

Completion Certificate

I,	1
Highway") on Engineering, Procurement and Construction (EPC) basis through	
It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highway have been completed, and the Project Highway is hereby declared fit for entry into operation on this the day of 20, Scheduled Completed Date for which was the day of	2
SIGNED, SEALED AND DELIVERED	
For and on behalf of the Authority's Engineer by	
(Signature)	
(Name)	
(Designation) (Address)	

Schedule - M

(See Clauses 14.6, 15.2 and 19.7)

Payment Reduction for Non-Compliance

1. Payment reduction for non-compliance with the Maintenance Requirements

- (i) Monthly lump sum payments for maintenance shall be reduced in the case of noncompliance with the Maintenance Requirements set forth in Schedule-E.
- (ii) Any deduction made on account of non-compliance with the Maintenance Requirements shall not be paid even after compliance subsequently. The deductions shall continue to be made every month until compliance is done.
- (iii) The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph 2.

2. Percentage reductions in lump sum payments on monthly basis

(i) The following percentages shall govern the payment reduction:

S. No.	Item/Defect/Deficiency	Percentage
(a)	Carriageway/Pavement	
(i)	Potholes, cracks, other surface defects	15%
(ii)	Repairs of Edges, Rutting	5%
(b)	Road, Embankment, Cuttings, Shoulders	
(i)	Edge drop, inadequate cross fall, undulations, settlement, potholes, ponding, obstructions	10%
(ii)	Deficient slopes, raincuts, disturbed pitching, vegetation growth, pruning of trees	5%
(c)	Bridges and Culverts	
(i)	Desilting, cleaning. vegetation growth, damaged pitching, flooring, parapets, wearing course, footpaths, any damage to foundations	20%
(ii)	Any Defects in superstructures, bearings and sub-structures	10%

S. No.	Item/Defect/Deficiency	Percentage
(iii)	Painting, repairs/replacement kerbs, railings, parapets, guideposts/crash barriers	5%
(d)	Roadside Drains	
(i)	Cleaning and repair of drains	5%
(e)	Road Furniture	
(i)	Cleaning, painting, replacement of road signs, delineators, road markings, 200 m/km/5 th km stones	5%
(f)	Miscellaneous Items	
(i)	Removal of dead animals, broken down/accidented vehicles, fallen trees, road blockades or malfunctioning of mobile crane	10%
(ii)	Any other Defects in accordance with paragraph 1.	5%
(g)	Defects in Other Project Facilities	5%

(ii) The amount to be deducted from monthly lump-sum payment for non-compliance of particular item shall be calculated as under:

$$R = P/_{100} \times (M1~or~M2) \times ^{L1}/_{L}$$

Where,

P= Percentage of particular item/Defect/deficiency for deduction

M1= Monthly lump-sum payment in accordance para 1.2 above of this Schedule

M2= Monthly lump-sum payment in accordance para 1.2 above of this Schedule

L1= Non-complying length L= Total length of the road,

R= Reduction (the amount to be deducted for non-compliance for a particular item/Defect/deficiency

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or non-compliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

Schedule - N

(See Clause 18.1 (i))

Selection of Authority's Engineer

1. Selection of Authority's Engineer

- (i) The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority's Engineer.
- (ii) In the event of termination of the Technical Consultants appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

2. Terms of Reference

The Terms of Reference for the Authority's Engineer (the "**TOR**") shall substantially conform with Annex 1 to this Schedule N.

3. Appointment of Government entity as Authority's Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority's Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority's Engineer.

Annex - I

(Schedule - N)

Terms of Reference for Authority's Engineer

1. Scope

- - # In case the bid of Authority's Engineer is invited simultaneously with the bid of EPC project, then the status of bidding of EPC project only to be indicated
- (ii) The TOR shall apply to construction and maintenance of the Project Highway.

2. Definitions and interpretation

- (i) The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- (ii) References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.
- (iii) The rules of interpretation stated in Article 1 of the Agreement shall apply, mutatis mutandis, to this TOR.

3. General

- (i) The Authority's Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.
- (ii) The Authority's Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority before determining:
 - (a) any Time Extension;
 - (b) any additional cost to be paid by the Authority to the Contractor;
 - (c) the Termination Payment; or

- (d) issuance of Completion Certificate or
- (e) any other matter which is not specified in (a), (b), (c) or (d) above and which creates a financial liability on either Party.
- (iii) The Authority's Engineer shall submit regular periodic reports, at least once every month, to the Authority in respect of its duties and functions under this Agreement. Such reports shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.
- (iv) The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
- (v) The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
- (vi) In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

4. Construction Period

- (i) During the Construction Period, the Authority's Engineer shall review and approve the Drawings furnished by the Contractor along with supporting data, including the geo-technical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1 (vi). The Authority's Engineer shall complete such review and approval and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- (ii) The Authority's Engineer shall review and approve any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.
- (iii) The Authority's Engineer shall review and approve the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty one) days stating the modifications, if any, required thereto.
- (iv) The Authority's Engineer shall complete the review and approve of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its

- comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.
- (v) The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- (vi) The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.
- (vii) The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.
- (viii) The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- (ix) For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4 (ix), the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance.
- (x) The Authority's Engineer shall test check at least 50 (fifty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- (xi) The timing of tests referred to in Paragraph 4 (ix), and the criteria for acceptance/ rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.
- (xii) In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.

- (xiii) The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- (xiv) In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.
- (xv) The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.2.
- (xvi) Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- (xvii) In the event that the Contractor carries out any remedial measures to secure the safety of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.
- (xviii) The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate, as the case may be. For carrying out its functions under this Paragraph 4 (xviii) and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

5. Maintenance Period

- (i) The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- (ii) The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.

- (iii) The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in this behalf.
- (iv) In respect of any defect or deficiency referred to in Paragraph 3 of Schedule- E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.
- (v) The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause 14.5.

6. Determination of costs and time

- (i) The Authority's Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.
- (ii) The Authority's Engineer shall determine the period of Time Extension that is required to be determined by it under the Agreement.
- (iii) The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause 18.5.

7. Payments

- (i) The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2 (iv) (d).
- (ii) Authority's Engineer shall -
 - (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
 - (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable to the

Contractor, after adjustments in accordance with the provisions of Clause 19.10.

- (iii) The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.
- (iv) The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

8. Other duties and functions

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

9. Miscellaneous

- (i) A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authority forthwith.
- (ii) The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.
- (iii) Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an asbuilt survey illustrating the layout of the Project Highway and setback lines, if any, of the buildings and structures forming part of Project Facilities; and shall hand them over to the Authority against receipt thereof.
- (iv) The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- (v) The Authority's Engineer shall inform the Authority and the Contractor of any event of Contractor's Default within one week of its occurrence.

Schedule - 0

(See Clauses 19.4 (i), 19.6 (i), and 19.8 (i))

Forms of Payment Statements

1. Stage Payment Statement for Works

The Stage Payment Statement for Works shall state:

- (a) the estimated amount for the Works executed in accordance with Clause 19.3 (i) subsequent to the last claim;
- (b) amounts reflecting adjustments in price for the aforesaid claim;
- (c) the estimated amount of each Change of Scope Order executed subsequent to the last claim;
- (d) amounts reflecting adjustment in price, if any, for (c) above in accordance with the provisions of Clause 13.2 (iii) (a);
- (e) total of (a), (b), (c) and (d) above;
- (f) Deductions:
 - i. Any amount to be deducted in accordance with the provisions of the Agreement except taxes;
 - ii. Any amount towards deduction of taxes; and
 - iii. Total of (i) and (ii) above.
- (g) Net claim: (e) (f) (iii);
- (h) The amounts received by the Contractor upto the last claim:
 - i. For the Works executed (excluding Change of Scope orders);
 - ii. For Change of Scope Orders, and
 - iii. Taxes deducted

2. Monthly Maintenance Payment Statement

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the Agreement;
- (b) the deductions for maintenance work not done;
- (c) net payment for maintenance due, (a) minus (b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction of taxes

3. Contractor's claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

Schedule - P

(See Clause 20.1)

Insurance

1. Insurance during Construction Period

- (i) The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire and terrorism:
 - (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
 - (b) insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- (ii) The insurance under sub para (a) and (b) of paragraph 1(i) above shall cover the Authority and the Contractor against all loss or damage from any cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

2. Insurance for Contractor's Defects Liability

The Contractor shall effect and maintain insurance cover of not less than 15% of the Contract Price for the Works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and which arises from a cause occurring prior to the issue of the Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

3. Insurance against injury to persons and damage to property

(i) The Contractor shall insure against its liability for any loss, damage, death or bodily injury, or damage to any property (except things insured under Paragraphs 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number of occurrences.

The insurance cover shall be not less than: Rs. [*****]

(ii) The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:

- (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works; and
- (b) damage which is an unavoidable result of the Contractor's obligations to execute the Works.

4. Insurance to be in joint names

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

Schedule-Q

(See Clause 14.10)

Tests on Completion of Maintenance Period

1. Riding Quality test:

Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,200 (two thousand and two hundred only)] mm for each kilometre.

2. Visual and physical test:

The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include measurement of cracking, rutting, stripping and potholes and shall be as per the requirement of maintenance mentioned in Schedule-E.

Schedule-R

(See Clause 14.10)

Taking Over Certificate

I,
through
SIGNED, SEALED AND DELIVERED
(Signature)
(Name and designation of Authority's Representative)
(Address)

***** End of the Document *****