

SCHEDULES

For

“Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode”

August, 2021

National Highways & Infrastructure Development Corporation Ltd
3rd floor, PTI Building, 4-Parliament Street,

New Delhi – 110001

Schedule-A

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Schedule - A

(See Clauses 2.1 and 8.1)

Site of The Project


1. The Site

- (i)** The Site of the two-lane (proposed 4-lane divided carriageway) Project Highway shall include the land, buildings, structures and road works as described in Annex-I of this **Schedule-A**
- (ii)** The dates of handing over the Right of Way to the Contractor are specified in Annex-II of this Schedule-A.
- (iii)** An inventory of the Site including the land, buildings, structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Contractor, and such inventory shall form part of the memorandum referred to in Clause 8.2.1 of this Agreement.
- (iv)** The alignment plans of the Project Highway are specified in Annex-III.
- (v)** The status of the environment clearances obtained or awaited is given in Annex IV.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



KEY PLAN

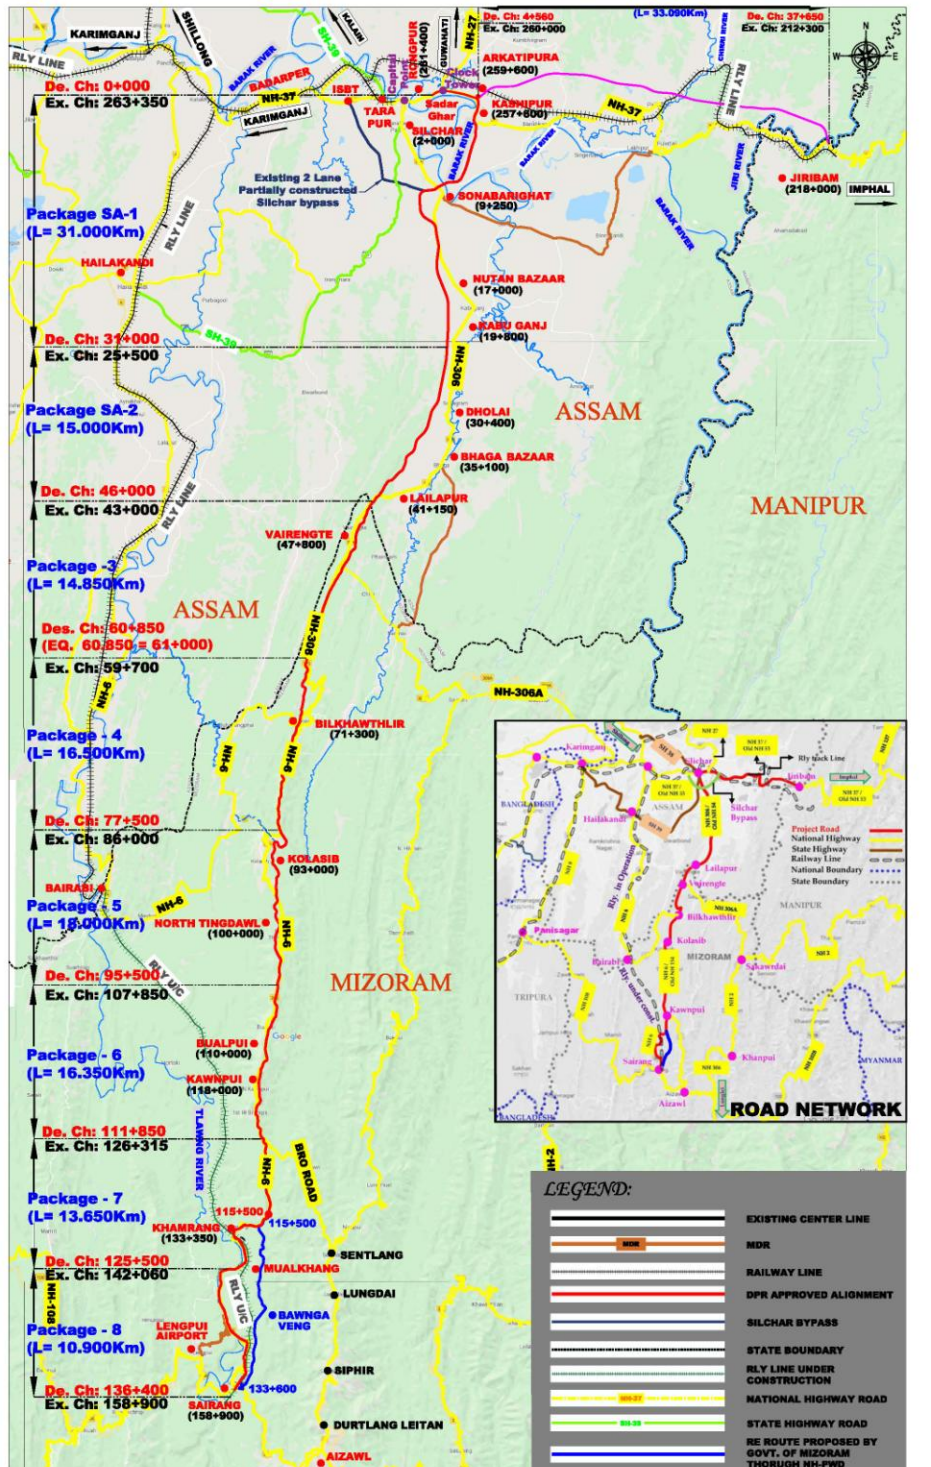

* S= Silchar, A=Aizawl

* (Please read EQ. Design Ch. 60+850 of previous package = Design Ch. 61+000 of this package as both are at same location)

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - I
(Schedule-A)
Site for the Project

1. Site

The Site of the two-lane (proposed 4-lane divided carriageway) Project Highway starts from Chhimluang –and ends at Kolasib (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the state of Mizoram. The land, carriageway and structures comprising the Site are described below.

** (Please read EQ. Design Ch. 60+850 of previous package = Design Ch. 61+000 of this package as both are at same location)*

2. Land

The Site of the Project Highway comprises the land described below:

SL No.	Chainage (km)		Right of Way (m)	Remarks
	From	To		
1	59+700	61+115	10	
2	61+115	79+650	NA	Bilkhawthlir Bypass
3	79+650	86+000	10	

3. Carriageway

The present carriageway of the Project Highway 7.0 m wide. The type of the existing pavement is flexible.

SL No.	Existing Chainage		Length (m)	Carriageway width (m)	Remarks
	From	To			
1	59+700	61+115	1415	7	
2	61+115	79+650	18535	NA	Bilkhawthlir Bypass
3	79+650	86+000	6350	7	

4. Major Bridges

The Site includes the following Major Bridges:

S. No.	Chainage (km)	Type of super structures			No. of Spans with span length (m)	Width (m)
		Foundation	Sub- structure	Superstructure		
NIL						

5. Road over-bridges (ROB)/ Road under-bridges (RUB)

The Site includes the following ROB (road over railway line)/RUB (road under railway line):

S. No.	Chainage (km)	Type of Structure		No. of Spans with span length (m)	Width (m)	ROB/RUB
		Foundation	Superstructure			
NIL						

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



6. Grade separators

The Site includes the following grade separators:

S. No.	Chainage (km)	Type of Structure		No. of Spans with span length (m)	Width (m)
		Foundation	Superstructure		
NIL					

7. Minor bridges

The Site includes the following Minor bridges:

S. No.	Chainage (km)	Type of Structure			No. of Spans with span length (m)	Width (m)
		Foundation	Sub-structures	Superstructure		
NIL						

8. Railway level crossings

The Site includes the following railway level crossings:

S. No.	Existing Chainage (Km)	Name of the crossing	Leads to		Remarks
			On LHS	On RHS	
Nil					

9. Underpasses (vehicular, non-vehicular)

The Site includes the following underpasses:

S. No.	Chainage (km)	Type of Structure	No. of Spans with span length (m)	Width (m)
NIL				

10. Culverts

The Site has the following culverts:

S. No.	Chainage (km)	Type of Culvert	Span /Opening with span length (m)	Width (m)
*1	59+250	Pipe	1 x 0.9	9.60
*2	59+300	Pipe	1 x 0.9	7.50
*3	59+350	Pipe	1 x 0.9	10.50
4	59+700	Pipe	1 x 0.9	9.60
5	60+600	Pipe	1 x 0.9	9.6
6	61+600	Pipe	1 x 0.9	9.5
7	61+800	Pipe	1 x 0.9	10.5
8	64+900	Pipe	Chocked	10.5
9	66+400	Pipe	1 x 0.9	
10	68+900	Pipe	Chocked	
11	70+100	Pipe	1 x 0.9	10
12	70+300	Pipe	1 x 0.9	10

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



S. No.	Chainage (km)	Type of Culvert	Span /Opening with span length (m)	Width (m)
13	71+200	Pipe	1 x 0.9	10.6
14	71+250	Pipe	1 x 1.2	10
15	71+400	Pipe	Chocked	-
16	71+600	Pipe	1 x 1.2	10
17	71+900	Pipe	1 x 0.9	10
18	72+050	Pipe	1 x 0.9	10
19	72+100	Pipe	1 x 0.9	10
20	72+600	Pipe	1 x 0.9	10
21	72+700	Pipe	1 x 0.9	10
22	72+750	Pipe	Chocked	
23	73+500	Pipe	Chocked	10
24	74+300	Pipe	1 x 0.9	8
25	76+800	Pipe	1 x 0.9	9.6
26	77+000	Pipe	1 x 0.9	9.6
27	77+700	Pipe	1 x 0.9	9.6
28	77+900	Pipe	1 x 0.9	9.6
29	78+300	Pipe	1 x 0.9	10.5
30	78+400	Pipe	1 x 0.9	8
31	78+600	Pipe	1 x 0.9	8
32	78+900	Pipe	1 x 0.9	10.5
33	79+500	Pipe	1 x 0.9	9.6
34	79+700	Pipe	1 x 0.9	9.6
35	79+950	Pipe	1 x 0.9	10
36	80+100	Pipe	1 x 0.9	12
37	80+150	RCC Slab	1 X 2.5	10
38	80+900	Pipe	1 x 0.9	12
39	81+300	Pipe	1 x 0.9	12
40	82+000	Pipe	1 x 0.9	10.5
41	82+900	Pipe	1 x 0.9	10.5
42	83+600	Pipe	Chocked	10.5
43	84+250	Pipe	Chocked	12
44	84+600	Pipe	1 x 0.9	12
45	85+450	Pipe	1 x 0.9	12
46	85+900	Pipe	2 x 0.9 + 2 x 0.6	10.5

11. Bus bays

The details of bus shelters on the Site are as follows:

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand side
NIL				

12. Truck Lay byes

The details of truck lay byes are as follows:

Sl. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand side
NIL				

13. Roadside drains

The details of the roadside drains are as follows:

S. No.	Location		Type	
	From km	to km	Masonry/cc (Pucca)	Earthen (Kutchha)
NIL				

14. Major Junctions

Details of major junctions are as follow.

Sl. No.	Location		At Grade	Seperated	Category of crossroad			
	From km	To km			NH	SH	MDR	Others
1	71+200		Y		NH			

(NH: National Highway, SH: State Highway, MDR: Major District Road)

15. Minor Junctions

The details of the minor junctions are as follows:

Sl. No.	Location		Type of Junctions	
	From km	To km	T-junction	Cross road
1	61+912		T	
2	68+303			Y
3	68+962			Y
4	69+545		T	
5	69+627			Y
6	71+645			Y
7	71+859			Y
8	71+905	BT Road		Y
9	72+128	BT Road		Y
10	72+200	BT Road		Y
11	72+551	BT Road	T	
12	72+685	BT Road		Y
13	72+750	BT Road	T	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Location		Type of Junctions	
	From km	To km	T-junction	Cross road
14	72+844	ER Road	T	
15	73+038	BT Road		Y
16	73+351	ER Road		Y
17	73+407	BT Road		Y
18	73+435	ER Road		Y
19	73+458	BT Road		Y
20	73+507	BT Road	T	
21	73+913	BT Road		Y
22	73+949	ER Road		Y
23	74+713	ER Road		Y
24	74+779	BT Road	T	
25	74+937	ER Road		Y
26	78+050	ER Road		Y

16. Bypasses

The details of the bypasses are as follows:

S. No.	Name of bypass (town)	Chainage (km) From Km to km	Length (km)

17. Details of Existing Utilities Schedule

The existing utilities schedules as below,

17.1 Electrical Utilities

The Site includes the following Electrical Utilities: -

(a) Extra High-Tension Lines (EHT Lines)

Sl. No.	Chainage (km)		Length of line (km)				Nos. of Crossings			
	From	To	765 KV SC	400 KV DC	220 KV DC/SC	132 KV DC	765 KV SC	400 KV DC	220 KV DC/SC	132 KV DC
1	74+000	75+000	-	-	-	0.5	-	-	-	1
2	75+000	75+500				0.25				1

Note: (1) denotes Number of pole/towers

(b) High Tension/Low Tension Lines (HT/LT Lines)

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Chainage (km)		Length of line (km)			Nos. of Crossings			Transformer	
	From	To	33 KV	11 KV	LT	33 KV	11 KV	LT	Nos.	Capacity KVA
1	61+000	62+000		0.35	0.28		2			
2	62+000	63+000	0.12	0.1		1				
3	67+000	68+000		0.08			1			
4	68+000	69+000								
5	71+000	72+000			0.2			1		
6	73+000	74+000	0.2							
7	76+000	76+500	0.1			1				

Note: (1) denotes Number of pole/towers

17.2 Public Health Utilities (Water/Sewage Pipelines)

(a) The Site includes the following Public Health Utilities: -

Sl. No	Chainage		Length (in km)				Crossings				Remarks
	From	To	Water Supply Line		Sewage Line		Water Supply Line		Sewage Line		
			With Pum ping	With Gravity Flow	With Pum ping	With Gravity Flow	With Pum ping	With Gravity Flow	With Pum ping	With Gravity Flow	
1	61+000	61+150	3.75		NIL				NIL		50 mm dia pipe Total length = Sl.no (1+4+5)
2			0.675								20mm dia pipe
3	61+500	62+000	2.6								40mm dia pipe
4	61+500	61+900	3.75								50 mm dia pipe Total length = Sl.no (1+4+5)
5	62+000	62+500									

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



(b) Bore well/Hand Pump within RoW – Nil

(c) Water Tank within RoW

Sl No	Existing Chainage	Remarks
1	61+500	Capacity; 3 Lakh
2	61+840	capacity; 2 Lakh

17.3 Any Other Lines

No.

18. Other Structures: NIL

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - II

(As per Clause 8.3 (i))

(Schedule-A)

Dates for providing Right of Way of Construction Zone

The dates on which the Authority shall provide Right of Way to the Contractor on different stretches of the Site are stated below:

(i) Full Right of Way (full width)

Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing Right of Way
(1)	(2)	(3)	(4)	(5)	
(i) Full Right of Way (full width)	61+120	61+330	210	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	61+330	61+430	100	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	61+430	61+700	270	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+070	62+160	90	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+160	62+210	50	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+225	62+300	75	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+300	62+370	70	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+370	62+455	85	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+465	62+540	75	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+540	62+620	80	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+620	62+680	60	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+680	62+800	120	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+800	62+980	180	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	62+980	63+080	100	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	63+080	63+150	70	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	63+150	63+360	210	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	63+360	63+590	230	60	Within 30 Days of Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing Right of Way
width)					Date
(i) Full Right of Way (full width)	63+590	63+750	160	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	63+750	63+910	160	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	63+910	64+000	90	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+000	64+030	30	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+030	64+190	160	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+190	64+330	140	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+330	64+460	130	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+460	64+500	40	105 (S Road)	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+500	64+650	150	80 (S Road)	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+650	64+740	90	95 (S Road)	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	64+740	65+070	330	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	65+070	65+420	350	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	65+420	65+560	140	40	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	65+560	65+690	130	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	65+690	65+850	160	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	65+850	66+050	200	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+050	66+390	340	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+390	66+410	20	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+410	66+650	240	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+650	66+780	130	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+780	66+890	110	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	66+890	67+040	150	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+040	67+070	30	50	Within 30 Days of Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing Right of Way
(i) Full Right of Way (full width)	67+070	67+200	130	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+200	67+280	80	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+280	67+440	160	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+440	67+610	170	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+610	67+720	110	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	67+720	68+060	340	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	68+060	68+260	200	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	68+260	69+150	890	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	69+150	69+400	250	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	69+400	69+700	300	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	69+700	69+810	110	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	69+810	70+250	440	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	70+250	70+470	220	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	70+470	70+710	240	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	70+710	70+730	20	70	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	70+730	70+820	90	60	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	70+820	71+340	520	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	71+340	71+400	60	55	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	71+400	71+570	170	50	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	71+570	71+730	160	45	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	73+120	73+180	60	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	73+460	73+520	60	65	Within 30 Days of Appointed Date
(i) Full Right of Way (full width)	73+520	73+600	80	60	Within 30 Days of Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



(ii) Part Right of Way (part width)

Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing Right of Way
(1)	(2)		(3)	(4)	(5)
(ii) Part Right of Way (part width)	61+000	61+070	70	10	On Appointed Date
(ii) Part Right of Way (part width)	61+070	61+120	50	10	On Appointed Date
(ii) Part Right of Way (part width)	61+700	61+790	90	10	On Appointed Date
(ii) Part Right of Way (part width)	61+790	62+030	240	10	On Appointed Date
(ii) Part Right of Way (part width)	62+030	62+070	40	10	On Appointed Date
(ii) Part Right of Way (part width)	62+210	62+225	15	10	On Appointed Date
(ii) Part Right of Way (part width)	62+455	62+465	10	10	On Appointed Date
(ii) Part Right of Way (part width)	71+730	71+800	70	10	On Appointed Date
(ii) Part Right of Way (part width)	71+800	71+990	190	10	On Appointed Date
(ii) Part Right of Way (part width)	71+990	72+050	60	10	On Appointed Date
(ii) Part Right of Way (part width)	72+050	72+140	90	10	On Appointed Date
(ii) Part Right of Way (part width)	72+140	72+240	100	10	On Appointed Date
(ii) Part Right of Way (part width)	72+240	72+310	70	10	On Appointed Date
(ii) Part Right of Way (part width)	72+310	72+400	90	10	On Appointed Date
(ii) Part Right of Way (part width)	72+400	72+740	340	10	On Appointed Date
(ii) Part Right of Way (part width)	72+740	72+820	80	10	On Appointed Date
(ii) Part Right of Way (part width)	72+820	72+910	90	10	On Appointed Date
(ii) Part Right of Way (part width)	72+910	72+970	60	10	On Appointed Date
(ii) Part Right of Way (part width)	72+970	73+120	150	10	On Appointed Date
(ii) Part Right of Way (part width)	73+180	73+410	230	10	On Appointed Date
(ii) Part Right of Way (part width)	73+410	73+460	50	10	On Appointed Date
(ii) Part Right of Way (part width)	73+600	73+660	60	10	On Appointed Date
(ii) Part Right of Way (part width)	73+660	73+820	160	10	On Appointed Date
(ii) Part Right of Way (part width)	73+800	74+180	380	10	On Appointed Date
(ii) Part Right of Way (part width)	74+180	74+470	340	10	On Appointed Date
(ii) Part Right of Way (part width)	74+470	74+860	390	10	On Appointed Date
(ii) Part Right of Way (part width)	74+860	75+000	140	10	On Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing Right of Way
(1)	(2)		(3)	(4)	(5)
(ii) Part Right of Way (part width)	75+000	75+110	110	10	On Appointed Date
(ii) Part Right of Way (part width)	75+110	75+460	350	10	On Appointed Date
(ii) Part Right of Way (part width)	75+460	75+500	40	10	On Appointed Date
(ii) Part Right of Way (part width)	75+500	75+560	60	10	On Appointed Date
(ii) Part Right of Way (part width)	75+560	75+590	30	10	On Appointed Date
(ii) Part Right of Way (part width)	75+590	75+900	310	10	On Appointed Date
(ii) Part Right of Way (part width)	75+900	75+930	30	10	On Appointed Date
(ii) Part Right of Way (part width)	75+930	75+990	60	10	On Appointed Date
(ii) Part Right of Way (part width)	75+990	76+010	20	10	On Appointed Date
(ii) Part Right of Way (part width)	76+010	76+590	580	10	On Appointed Date
(ii) Part Right of Way (part width)	76+590	76+820	230	10	On Appointed Date
(ii) Part Right of Way (part width)	76+820	76+970	150	10	On Appointed Date
(ii) Part Right of Way (part width)	76+970	77+060	90	10	On Appointed Date
(ii) Part Right of Way (part width)	77+060	77+150	90	10	On Appointed Date
(ii) Part Right of Way (part width)	77+150	77+340	190	10	On Appointed Date
(ii) Part Right of Way (part width)	77+340	77+500	160	10	On Appointed Date

(iii) Balance Right of Way (width)

Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing ROW
(1)	(2)	(3)	(4)	(5)	(1)
(iii) Balance Right of Way (width)	61+00 0	61+07 0	70	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	61+07 0	61+12 0	50	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	61+70 0	61+79 0	90	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	61+79 0	62+03 0	240	45	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	62+03 0	62+07 0	40	40	Within 60 Days of Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing ROW
(1)	(2)	(3)	(4)	(5)	(1)
(iii) Balance Right of Way (width)	62+210	62+225	15	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	62+455	62+465	10	60	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	71+730	71+800	70	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	71+800	71+990	190	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	71+990	72+050	60	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+050	72+140	90	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+140	72+240	100	59	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+240	72+310	70	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+310	72+400	90	37	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+400	72+740	340	25	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+740	72+820	80	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+820	72+910	90	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+910	72+970	60	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	72+970	73+120	150	45	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	73+180	73+410	230	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	73+410	73+460	50	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	73+600	73+660	60	50	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	73+660	73+820	160	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	73+800	74+180	380	62.50	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	74+180	74+470	340	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	74+470	74+860	390	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way	74+860	75+000	140	30	Within 60 Days of Appointed

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	From km	To km	Length (m)	Width (m)	Date of Providing ROW
(1)	(2)	(3)	(4)	(5)	(1)
(width)	0	0			Date
(iii) Balance Right of Way (width)	75+00 0	75+11 0	110	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+11 0	75+46 0	350	30	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+46 0	75+50 0	40	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+50 0	75+56 0	60	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+56 0	75+59 0	30	60	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+59 0	75+90 0	310	50	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+90 0	75+93 0	30	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+93 0	75+99 0	60	35	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	75+99 0	76+01 0	20	60	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	76+01 0	76+59 0	580	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	76+59 0	76+82 0	230	50	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	76+82 0	76+97 0	150	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	76+97 0	77+06 0	90	60	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	77+06 0	77+15 0	90	40	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	77+15 0	77+34 0	190	55	Within 60 Days of Appointed Date
(iii) Balance Right of Way (width)	77+34 0	77+50 0	160	40	Within 60 Days of Appointed Date

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - III

(Schedule-A)

Alignment Plans

The existing alignment of the Project Highway shall be modified in the following sections as per the alignment plan indicated below:

- (i) The alignment of the Project Highway is enclosed in alignment plan. Finished road level indicated in the alignment plan shall be followed by the EPC Contractor as minimum FRL if in Fill Section and maximum FRL if in cut section. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The EPC Contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.
- (ii) Traffic Signages of the Project Highway showing numbers & location of traffic signs is enclosed. The contractor shall, however, improve/upgrade upon the traffic signage plan as indicated in Annex-III based on site/design requirement as per the relevant specifications/IRC Codes/Manual.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - IV

(Schedule-A)

Environment Clearances

As per MOEF notification F. No. 21-270/2008-1A.III (dated 22 August 2013), Environmental Clearance is not required for Mizoram state. Forest Clearance is not required.

Schedule-B

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Schedule - B

(See Clause 2.1)

Development of the Project Highway

1 Development of the Project Highway

Development of the Project Highway shall include design and construction of the Project Highway as described in this Schedule-B and in Schedule-C.

2 4-Laning with Paved Shoulder

Four Laning shall include construction of the Four Lane Project highway as described in Annex-I of this Schedule-B and in Schedule C.

3 Specifications and Standards

The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-I of Schedule-D.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - I

(Schedule-B)

Description of Project Road (4-Laning)

Site of the Four-lane divided Project Highway comprises the section of National Highway No. 306 from Chhimluang to Kolasib (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar – Vairengte - Sairang road in the State of Mizoram. The coordinates of start and end point of project road are given below.

Co-ordinates of Start and End of Project Stretch

Location		UTM Co-Ordinate	
Description	Design Chainage	Easting (m)	Northing (m)
Start of Project Road	61+000	471435.036	2697625.124
End of Project Road	77+500	468795.346	2682163.954

** (Please read EQ. Design Ch. 60+850 of previous package = Design Ch. 61+000 of this package as both are at same location)*

1 Widening of The Existing Highway

- (i) The Project Highway shall follow the existing alignment unless otherwise specified by the Authority and shown in the alignment plans specified in Annex III of Schedule-A. Geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for mountainous/ hilly terrain to the extent land is available.

(ii) Width of Carriageway

- (a) Four-Laning with paved shoulders shall be undertaken. The paved carriageway shall be in accordance with the typical cross-sections' drawings in the manual IRC SP 84 - 2014. The typical drawings attached in schedules.

Provided that in the built-up areas [refer to paragraphs 2.1 (ii) (a) of the Manual and provide necessary details]: the width of the carriageway shall be as specified in the following table:

Sl. No.	Built-up stretch (Township)	Location (km to km)	Width (m)	Typical cross section (Ref. to Manual)
NIL				

- (b) Except as otherwise provided in this Agreement, the width of the paved carriageway and cross-sectional features shall conform to paragraph 1 (i) above.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



2 Geometric Design and General Features

(i) General

Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the IRC SP-84-2019.

(ii) Design Speed

The design speed given in table 2.1 of IRC: SP: 84-2019 shall be adopted.

(iii) Improvements of the existing road geometrics

In the sections, where improvement of the existing road geometrics to the prescribed standards is not possible, the existing road geometrics shall be improved to the extent possible within the given right of way and proper road signs and safety measures shall be provided.

a) The bypass has been provided in following location.

Sl. No	Location	Existing Chainage (Km)		Existing Length (m)	Design Chainage (Km)		Design Length (m)
		Start	End		Start	End	
1	Bilkhawthlir Bypass	61+115	79+650	18535	62+225	71+885	9660
	Total			18535			9660

b) Realignments and Geometric Improvement locations

Sl. No	Exist. Chainage		Exist. Length (m)	Design Chainage		Type of Deficiency	Design Length (m)
	Start	End		Start	End		
1	59+706	59+815	109	61+000	61+100	Geometric Improvement	100
2	59+815	60+594	779	61+100	61+720		620
3	60+898	60+933	35	61+985	62+020		35
4	60+996	61+174	177.5	62+070	62+210		140
5	80+926	81+047	121	73+090	73+165		75
6	81+428	81+468	40	73+290	73+340		50
7	81+674	81+946	272	73+460	73+700		240
8	82+082	82+112	30	73+830	73+860		30
9	84+440	84+480	40	76+065	76+105		40
10	85+325	85+365	40	76+900	76+940		40

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No	Exist. Chainage		Exist. Length (m)	Design Chainage		Type of Deficiency	Design Length (m)
	Start	End		Start	End		
11	85+636	85+693	57	77+180	77+235		55
Total Length (m)			1700				1425

Also, apart from above bypass, the existing road geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for Mountainous / Hill terrain to the extent land is available.

(iv) **Right of Way** - Details of the Right of Way are given in Annex II of Schedule A.

(v) **Type of shoulders**

(a) Paved shoulder shall be provided as per enclosed typical cross section

(b) In open country (plain terrain), paved shoulders of 2.5m width shall be provided and balance 1.50m width shall be covered with 150mm thick compacted layer of granular material.

(c) Design and specifications of paved shoulders and granular material shall conform to the requirements specified in paragraphs 5.10 and 5.11 of the IRC: SP: 84-2019.

(vi) **Lateral and Vertical Clearances at Underpasses**

(a) Lateral and vertical clearances at Underpasses and provision of guardrails/crash barriers shall be as per the paragraph 2.10 of IRC SP 84-2019.

(b) **Lateral clearance:** The size of the opening at the Underpasses shall be as follows:

S. No.	Location (Chainage) (from km to km)	Span /opening (m)	Remarks
1	64+480	Span = 1 x 12m Vertical Clearance = 4.0m	LVUP

Vertical clearance: Vertical Clearance at Underpasses shall not be less than 4.0 m (urban area).

(vii) **Laterals and Vertical Clearance at Overpasses**

(a) Lateral and Vertical clearances at over passes shall be as per paragraph 2.11 of the IRC SP 84-2019.

(b) Lateral clearance: The width of the opening at the overpasses shall be as follows:

S. No.	Location (Chainage) (from km to km)	Span /opening (m)	Remarks
--------	-------------------------------------	-------------------	---------

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



1	67+450	Span =2 x 12.0m Vertical Clearance = 5.5 m	Overpass
---	--------	---	----------

(viii) Service roads

Service roads shall be constructed at the locations and for the lengths indicated below:

S. No.	Location of Service Road		Right Hand side (RHS)/Left Hand side (LHS)/Both side	Length (km) of Service Road
	From km	To km		
1	64+480	64+730	RHS	0.250

Note:

- The above length of slip/service road is excluding the tapering length/merging length of acceleration/deceleration lane. The entry and exit of slip road should be constructed as per Fig 2.1 C and service road as per Fig 2.1 A of IRC: SP: 84: 2019.
- Length of service road and slip road given in above table excludes length across the Project Highway for proper connectivity of crossroad on either side of Project Highway as given in the alignment plan enclosed at **Annex-III, Schedule-A** which shall be deemed to be included in the scope of work.
- The length of slip/service road shown in above table is minimum and may increase as per actual site conditions and No Change of Scope shall be admissible on this account.
- Width and locations of service road/slip road shown above are minimum and may vary as per site condition/as per design. Change in locations of slip/service road, if required, shall be deemed to be part of project.

(ix) Grade Separated Structures

- (a) Grade separated structures shall be provided as per paragraph 2.13 of the IRC SP 84-2019. The requisite particulars are given below:

Sl. No	Location of Structure	Length (m)	Number and length of clear Spans (m)	Remarks if Any
1	64+480	12	1 x 12m	LVUP
2	67+450	24	2 x 12m	Overpass

- (b) In the case of grade separated structures, the type of structure and the level of the Project Highway and the crossroads shall be as follows:

S. No.	Location (Design Chainage)	Type of Structure	Cross road at			Remarks , if any
			Existing level	Raised Level	Lowered Level	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



1	64+480	LVUP	*	*	*	
2	67+450	Overpass	*	*	*	

*Cross road levels shall be matched with the proposed highway at service road level and the same shall be finalized in consultation with Authority's Engineer. Any raising or lowering of crossroad is covered under scope of this work.

(x) Cattle and pedestrian underpass / overpass

Cattle and pedestrian underpass/ overpass shall be constructed as follows:

S. No.	Location	Type of Crossing
NIL		

(xi) Typical cross sections of the Project Highway

Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
61+000	61+030	30	7	Following Existing Alignment	Open Area	TCS 3	Geometric Improvements
61+030	61+080	50	7	Following Existing Alignment	Open Area	TCS 5	Geometric Improvements
61+080	61+230	150	-	New Alignment	Open Area	TCS 2	Geometric Improvements
61+230	61+350	120	7	Following Existing Alignment	Open Area	TCS 5	Geometric Improvements
61+350	61+440	90	-	New Alignment	Open Area	TCS 4	Geometric Improvements
61+440	61+470	30	-	New Alignment	Open Area	TCS 2	Geometric Improvements
61+470	61+530	60	-	New Alignment	Open Area	TCS 4	Geometric Improvements
61+530	61+660	130	-	New Alignment	Open Area	TCS 2	Geometric Improvements
61+660	61+690	30	-	New Alignment	Open Area	TCS 4	Geometric Improvements
61+690	61+740	50	-	New Alignment	Open Area	TCS 2	Geometric Improvements
61+740	61+810	70	-	New Alignment	Open Area	TCS 7	
61+810	62+030	220	-	New Alignment	Open Area	TCS 4	Geometric Improvements

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
62+030	62+070	40	-	New Alignment	Open Area	TCS 2	
62+070	62+160	90	-	New Alignment	Open Area	TCS 4	Geometric Improvements
62+160	62+240	80	-	New Alignment	Open Area	TCS 2	Geometric Improvements
62+240	62+640	400	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
62+640	62+700	60	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
62+700	62+800	100	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
62+800	63+030	230	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
63+030	63+060	30	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
63+060	63+070	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
63+070	63+910	840	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
63+910	64+000	90	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
64+000	64+010	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
64+010	64+090	80	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
64+090	64+120	30	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
64+120	64+420	300	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
64+420	64+540	120	-	New Alignment	Open Area	TCS 9	Bilkhawthlir Bypass
64+540	64+680	140	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
64+680	64+830	150	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
64+830	64+860	30	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
64+860	64+950	90	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
64+950	64+960	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
64+960	64+990	30	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
64+990	65+020	30	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
65+020	65+060	40	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
65+060	65+470	410	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
65+470	65+480	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
65+480	65+530	50	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
65+530	65+540	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
65+540	65+730	190	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
65+730	65+810	80	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
65+810	65+820	10	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
65+820	65+970	150	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
65+970	66+020	50	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
66+020	66+670	650	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
66+670	66+750	80	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
66+750	66+980	230	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
66+980	67+000	20	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
67+000	67+030	30	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
67+030	67+200	170	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
67+200	67+280	80	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
67+280	67+440	160	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
67+440	67+460	20	-	New Alignment	Open Area	TCS 10	Bilkhawthlir Bypass
67+460	67+620	160	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
67+620	67+650	30	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
67+650	68+370	720	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
68+370	68+400	30	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
68+400	68+510	110	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
68+510	68+550	40	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
68+550	69+140	590	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
69+140	69+170	30	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
69+170	69+690	520	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
69+690	69+720	30	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
69+720	69+990	270	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
69+990	70+160	170	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
70+160	70+250	90	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
70+250	70+290	40	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
70+290	70+460	170	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
70+460	70+540	80	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
70+540	70+710	170	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
70+710	70+800	90	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
70+800	70+920	120	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
70+920	71+000	80	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
71+000	71+150	150	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
71+150	71+200	50	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
71+200	71+290	90	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
71+290	71+400	110	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
71+400	71+490	90	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
71+490	71+540	50	-	New Alignment	Open Area	TCS 6	Bilkhawthlir Bypass
71+540	71+590	50	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
71+590	71+670	80	-	New Alignment	Open Area	TCS 8	Bilkhawthlir Bypass
71+670	71+720	50	-	New Alignment	Open Area	TCS 4	Bilkhawthlir Bypass
71+720	71+760	40	-	New Alignment	Open Area	TCS 2	Bilkhawthlir Bypass
71+760	71+960	200	-	New Alignment	Open Area	TCS 7	Bilkhawthlir Bypass
71+960	72+040	80	-	New Alignment	Open Area	TCS 4	
72+040	72+050	10	7	Following Existing Alignment	Open Area	TCS 1	
72+050	72+140	90	7	Following Existing Alignment	Open Area	TCS 7	
72+140	72+370	230	7	Following Existing Alignment	Open Area	TCS 3	
72+370	72+390	20	7	Following Existing Alignment	Open Area	TCS 1	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
72+390	72+450	60	7	Following Existing Alignment	Open Area	TCS 3	
72+450	72+520	70	7	Following Existing Alignment	Open Area	TCS 1	
72+520	72+690	170	7	Following Existing Alignment	Open Area	TCS 7	
72+690	72+740	50	7	Following Existing Alignment	Open Area	TCS 1	
72+740	72+890	150	7	Following Existing Alignment	Open Area	TCS 3	
72+890	72+960	70	7	Following Existing Alignment	Open Area	TCS 7	
72+960	73+060	100	7	Following Existing Alignment	Open Area	TCS 3	
73+060	73+170	110	-	New Alignment	Open Area	TCS 4	Geometric Improvements
73+170	73+300	130	7	Following Existing Alignment	Open Area	TCS 3	
73+300	73+340	40	-	New Alignment	Open Area	TCS 2	Geometric Improvements
73+340	73+460	120	7	Following Existing Alignment	Open Area	TCS 3	
73+460	73+750	290	-	New Alignment	Open Area	TCS 4	Geometric Improvements
73+750	74+120	370	7	Following Existing Alignment	Open Area	TCS 3	Geometric Improvements
74+120	74+170	50	7	Following Existing Alignment	Open Area	TCS 7	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
74+170	74+220	50	7	Following Existing Alignment	Open Area	TCS 3	
74+220	74+280	60	7	Following Existing Alignment	Open Area	TCS 5	
74+280	74+320	40	7	Following Existing Alignment	Open Area	TCS 3	
74+320	74+380	60	7	Following Existing Alignment	Open Area	TCS 1	
74+380	74+420	40	7	Following Existing Alignment	Open Area	TCS 3	
74+420	74+450	30	7	Following Existing Alignment	Open Area	TCS 1	
74+450	74+600	150	7	Following Existing Alignment	Open Area	TCS 3	
74+600	74+640	40	7	Following Existing Alignment	Open Area	TCS 5	
74+640	74+800	160	7	Following Existing Alignment	Open Area	TCS 3	
74+800	74+900	100	7	Following Existing Alignment	Open Area	TCS 7	
74+900	75+120	220	7	Following Existing Alignment	Open Area	TCS 8	
75+120	75+140	20	7	Following Existing Alignment	Open Area	TCS 1	
75+140	75+170	30	7	Following Existing Alignment	Open Area	TCS 7	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
75+170	75+440	270	7	Following Existing Alignment	Open Area	TCS 1	
75+440	75+500	60	7	Following Existing Alignment	Open Area	TCS 3	
75+500	75+580	80	7	Following Existing Alignment	Open Area	TCS 8	
75+580	75+770	190	7	Following Existing Alignment	Open Area	TCS 3	
75+770	75+810	40	7	Following Existing Alignment	Open Area	TCS 5	
75+810	75+900	90	7	Following Existing Alignment	Open Area	TCS 3	
75+900	76+010	110	7	Following Existing Alignment	Open Area	TCS 8	
76+010	76+140	130	-	New Alignment	Open Area	TCS 4	Geometric Improvements
76+140	76+270	130	7	Following Existing Alignment	Open Area	TCS 7	
76+270	76+520	250	7	Following Existing Alignment	Open Area	TCS 3	
76+520	76+550	30	7	Following Existing Alignment	Open Area	TCS 5	
76+550	76+770	220	7	Following Existing Alignment	Open Area	TCS 3	
76+770	76+820	50	7	Following Existing Alignment	Open Area	TCS 7	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Chainage (m)		Distance (m)	Existing CW	Const. Type	Area Type	TCS Type	Remarks
From	To						
76+820	76+970	150	7	Following Existing Alignment	Open Area	TCS 3	Geometric Improvements
76+970	77+060	90	7	Following Existing Alignment	Open Area	TCS 8	
77+060	77+110	50	7	Following Existing Alignment	Open Area	TCS 3	
77+110	77+150	40	7	Following Existing Alignment	Open Area	TCS 5	
77+150	77+500	350	7	Following Existing Alignment	Open Area	TCS 3	Geometric Improvements

3 Intersections and Grade Separators

All intersections and grade separators shall be as per Section 3 of the IRC SP 84-2019. Existing intersections which are deficient shall be improved to the prescribed standards.

All intersections as per the site requirement shall be designed and constructed in accordance with the manual. List of intersections is given in below table. Draft layout of major junctions is given in indicative Plan & Profile drawings.

Properly designed intersections shall be provided at the locations and of the types and features given in the tables below:

(i) At-grade intersections

Sl. No.	Existing Chainage	Design Chainage	Type of Junctions (T, Y, +)	Side	Type of Road (SH/ MDR/ ODR/ VR)	Remarks
1	59+800	61+080	T	LHS	NH-306	Minor Junction
2	60+625	61+750	Y	LHS	NH-306	Minor Junction
3	-	64+720	T	RHS	VR	Minor Junction
4	79+450	71+730	T	LHS	NH-6	Minor Junction

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



***Note:** It is clarified that if any other junction is identified during development of the project highway in addition to those mentioned above shall also be improved with proper drainage facilities as per standards. It shall be covered within the scope of work. The Number, location & type of junction shown in above table are minimum and it may increase as per actual site condition and increase in number will not attract change of Scope on this account.*

(ii) Grade separated intersection with/without ramps.

S. No.	Location	Salient Feature	Minimum Length of Viaduct to be provided	Road to be carried over/ Under the structure
NIL				

4 Road Embankment and Cut Section

(i) Widening and improvement of the existing road embankment/cuttings and construction of new road embankment/ cuttings shall conform to the Specifications and Standards given in section 4 of the IRC SP 84-2019 and the specified cross-sectional details. Deficiencies in the plan and profile of the existing road shall be corrected.

(ii) Raising of the existing road

The height of the embankment shall be measured with respect to the Finished Road Levels. The Finished Road Level of main carriageway shall be designed so that the bottom of the subgrade is minimum 1.0m above the Highest Flood Level (HFL)/ High water table/Natural Ground Level and for service road, bottom of the sub grade is minimum 0.5m high above HFL/ High water table /NGL.

The Contractor may adopt suitable slope (angle) for the embankment as per the availability of fill material/design requirements. The slopes shall be checked for safety against failure. The slopes shall be protected with turfing/geo synthetics /geo green blanket/geo cells/stone pitching or any other method as per schedule D.

Wherever required, toe wall/retaining wall/other protection works along with drainage system shall be provided to contain the toe of the earthwork, so that all the features shown in the TCS are accommodated in the ROW provided.

All of surplus cutting soils shall be transported and be disposed to the Spoil Banks in accordance with the Clause 3.1 of Schedule D.

5 Pavement design

(i) Pavement design shall be carried out in accordance with Section 5 of the IRC SP 84-2019 and IRC SP: 59-2019.

(ii) Type of pavement

The existing flexible pavement shall be dismantled and reconstructed as new flexible pavement from (Design Chainages) Km 95+500 to Km 111+850 including Bus bay,

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Rest Area, Truck Lay Bye and Intersection.

(iii) Design requirements

Notwithstanding anything to the contrary contained in this agreement or the manual, the contractor shall design the pavement of main carriageway for design traffic of 40 MSA with a minimum design period of 20 years. CBR value as obtained at site shall be taken for design if less than 8%. Maximum value of CBR to be taken for design shall not exceed 8%.

Bituminous Grade VG 30 or VG 40 shall be used for BC.

(a) Design Period and strategy

A) Main carriageway:

Flexible pavement shall be designed for a minimum design period of 20 years. Stage construction shall not be permitted.

B) Service road/Slip Road:

Flexible pavement shall be designed for a minimum design period of 20 years. Stage construction shall not be permitted.

C) Strengthening of Existing pavement:

Nil

(b) Design Traffic

A) Main carriageway:

Notwithstanding anything to the contrary contained in this Agreement or the IRC SP 84-2019, the contractor shall design the pavement for design traffic of not less than 40 million standard axles (MSA) for Main carriageway.

B) Service Road

As per clause 5.5.4 of IRC SP 84-2019 service road shall be designed for minimum 10 MSA.

C) Strengthening of Existing pavement

Nil

(iv) Reconstruction of stretches

The existing flexible pavement shall be dismantled and reconstructed as Flexible pavement.

6 Roadside Drainage

Drainage system including surface and subsurface drains for the Project Highway shall be constructed as per Section 6 of the IRC SP 84-2019, in entire length including drains and culverts required along the crossroads at junctions/ interchanges/other locations. Any repair/ reconstruction required for the existing culverts along project highway/along crossroads at junctions shall be carried out. This will not attract any

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



change of scope.

In the cutting sections, lined/unlined drain shall be provided at the top of cut slope. All measures shall be taken to prevent ingress of countryside runoff entering into road formation width.

Ref. separate TCS drawings for more details

i) RCC cover drain:

RCC cover drain shall be provided at following locations.

LHS				RHS		
Sl No	Chainage (m)		Length (m)	Chainage (m)		Length (m)
	From	To		From	To	
1	61+090	61+730	640	61+460	62+180	720
2	71+690	71+990	300	71+690	71+990	300
Total Length=			940			1020

Note: The above locations are minimum. Additional locations if any required as per site condition shall be provided as per manual. It shall not be treated as change in scope of work.

ii) PCC open drain on hill side:

PCC open drain shall be provided on hill side at following locations.

LHS				RHS		
SI No	Chainage (m)		Length (m)	Chainage (m)		Length (m)
	From	To		From	To	
1	61+100	61+120	20	62+220	62+900	680
2	61+710	61+730	20	63+600	63+910	310
3	62+400	64+470	2070	64+490	64+700	210
4	64+500	71+690	7190	72+700	73+450	750
5	71+690	71+715	25			
6	75+390	77+500	2110			
Total Length=			11435			1950

Note: The above locations are minimum. Additional locations if any required as per site condition shall be provided as per manual. It shall not be treated as change in scope of work.

iii) PCC open drain on valley side:

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



PCC open drain shall be provided on valley side at following locations.

LHS				RHS		
Sl No	Chainage (m)		Length (m)	Chainage (m)		Length (m)
	From	To		From	To	
1	62+060	62+400	340	61+000	61+090	90
2	72+300	72+900	600	63+080	63+600	520
3	73+080	73+200	120	64+130	64+460	330
4	73+350	74+600	1250	64+490	64+700	210
5	74+780	75+120	340	64+730	70+460	5730
6				71+990	72+430	440
7				73+450	74+880	1430
8				75+200	75+760	560
9				76+390	76+970	580
10				77+150	77+500	350
Total Length=			2650			10240

Note: The above locations are minimum. Additional locations if any required as per site condition shall be provided as per manual. It shall not be treated as change in scope of work.

7 Design of Structures

(i) General

(a) All bridges, culverts and structures shall be designed and constructed in accordance with section 7 of the IRC SP 84-2019 and shall conform to the cross- sectional features and other details specified therein.

(b) Width of the carriageway of new bridges shall be as follows:

Refer to paragraph 7.3 (ii) of the IRC SP 84-2019 and specified width of carriageway of all new four lane bridges shall have footpaths on either side. The cross-sectional features shall be as per Fig.7.6 of the IRC SP 84-2019.

(c) The following bridges shall be provided with footpaths:

Sl. No.	Location at km	Remarks
Nil		

(d) All bridges shall be high-level bridges.

(e) The structures shall be designed to carry utility services like electric cable, water pipeline, OFC etc. as per the requirement of site.

Sl. No.	Bridge at km	Utility service to be carried	Remarks

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



(f) Cross-section of the new culverts and bridges at deck level shall conform to the typical cross-sections given in section 7 of the Manual.

(ii) Culverts

(a) Overall width of all culverts shall be equal to the roadway width of the approaches. Cross-section of the culverts at deck level for the Project Highway shall conform to the typical cross-sections given in section 7.3 (i), 7.3 (iii) and Fig.7.1 to Fig.7.5 of the IRC SP 84-2019.

(b) Reconstruction of existing culverts:

The existing culverts at the following locations shall be re-constructed as new culverts:

S. No.	Existing Chainage (Km)	Design Chainage (Km)	Existing Type	Existing Span	Proposed Type	Proposed Span	Remarks
1	60+600	62+045	Pipe	1 x 0.9	BOX	1x2x2	
2	61+600	62+560	Pipe	1 x 2	BOX	1x2x2	
3	79+950	72+060	Pipe	1 x 0.9	BOX	1x2x2	
4	80+900	73+030	Pipe	1 x 0.9	BOX	1x2x2	
5	82+000	73+320	Pipe	1 x 0.9	BOX	1x2x2	
6	82+900	74+020	Pipe	1 x 0.9	BOX	1x2x2	
7	83+600	75+690	Pipe	Chocked	BOX	1x2x2	
8	84+250	75+955	Pipe	Chocked	BOX	1x2x2	
9	84+600	76+530	Pipe	1 x 0.9	BOX	1x2x2	
10	85+450	77+010	Pipe	1 x 0.9	BOX	1x2x2	
11	85+900	77+140	Pipe	2 x 0.9 + 2 x 0.6	BOX	1x2x2	

(c) Widening of existing culverts

All existing culverts which are not to be reconstructed shall be widened to the roadway width of the Project Highway as per the typical cross section given in section 7.3 (i), (iii) and Fig. 7.1 to Fig. 7.5 of the IRC SP 84-2019. Repairs and strengthening of existing structures where required shall be carried out.

S. No	Culvert location	Span / Opening	Remarks, if any
Nil			

(d) Additional new culverts shall be constructed as per particulars given in the table below:

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Proposed Type	Proposed Span	Remarks
1	-	61+300	BOX	1x2x2	
2	-	61+450	BOX	1x2x2	
3	-	61+700	BOX	1x2x2	
4	-	62+740	BOX	1x2x2	
5	-	62+895	BOX	1x2x2	
6	-	63+050	BOX	1x2x2	
7	-	63+358	BOX	1x2x2	
8	-	63+553	BOX	1x2x2	
9	-	63+730	BOX	1x2x2	
10	-	64+023	BOX	1x2x2	
11	-	64+108	BOX	1x2x2	
12	-	64+300	BOX	1x2x2	
13	-	64+495	BOX	1x3x3	
14	-	64+770	BOX	1x2x2	
15	-	64+855	BOX	1x2x2	
16	-	65+045	BOX	1x2x2	
17	-	65+210	BOX	1x2x2	
18	-	65+510	BOX	1x2x2	
19	-	65+775	BOX	1x3x3	
20	-	65+995	BOX	1x3x3	
21	-	66+250	BOX	1x2x2	
22	-	66+415	BOX	1x2x2	
23	-	66+770	BOX	1x2x2	
24	-	66+870	BOX	1x2x2	
25	-	67+000	BOX	1x2x2	
26	-	67+240	BOX	1x2x2	
27	-	67+398	BOX	1x2x2	
28	-	67+630	BOX	1x2x2	
29	-	67+700	BOX	1x2x2	
30	-	67+888	BOX	1x2x2	
31	-	67+995	BOX	1x2x2	
32	-	68+250	BOX	1x2x2	
33	-	68+390	BOX	1x2x2	
34	-	68+515	BOX	1x2x2	
35	-	68+715	BOX	1x2x2	
36	-	68+855	BOX	1x2x2	
37	-	68+994	BOX	1x2x2	
38	-	69+145	BOX	1x2x2	
39	-	69+370	BOX	1x2x2	
40	-	69+560	BOX	1x2x2	
41	-	69+910	BOX	1x2x2	

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Proposed Type	Proposed Span	Remarks
42	-	70+260	BOX	1x2x2	
43	-	70+465	BOX	1x2x2	
44	-	70+755	BOX	1x2x2	
45	-	70+960	BOX	1x2x2	
46	-	71+170	BOX	1x2x2	
47	-	71+510	BOX	1x2x2	
48	-	73+670	BOX	1x2x2	
49	-	74+620	BOX	1x2x2	
50	-	74+800	BOX	1x2x2	
51	-	76+180	BOX	1x2x2	
52	-	76+800	BOX	1x2x2	
53	-	77+400	BOX	1x2x2	

At Junction and Crossroads

In addition to the above 11 No. of 1x2x2m Box culverts of 7.5 m length are proposed for crossroads, mentioned in the table below:

Sl. No.	Design Chainage (km)	Proposed Type	Proposed Span	Remarks
1	61+080	BOX	1x2x2	Cross Road
2	61+745	BOX	1x2x2	Cross Road
3	64+480	BOX	1x2x2	Cross Road
4	64+150	BOX	1x2x2	Cross Road
5	64+520	BOX	1x2x2	Cross Road
6	64+600	BOX	1x2x2	Cross Road
7	64+700	BOX	1x2x2	Cross Road
8	67+430	BOX	1x2x2	Cross Road
9	67+470	BOX	1x2x2	Cross Road
10	67+570	BOX	1x2x2	Cross Road

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Sl. No.	Design Chainage (km)	Proposed Type	Proposed Span	Remarks
11	71+730	BOX	1x2x2	Cross Road

Note:

- Above vent height (Clear opening height) are minimum and vertical height to be ascertained as per site condition.
- Overall width of all culverts shall be minimum to the roadway width. Wherever Service/Slip/Connecting roads are proposed, the width of the culvert shall be planned beyond the Service/Slip/Connecting roads so as to ensure proper drainage of storm water outside ROW.
- The number of Culverts shown above is minimum, any additional culvert required as per site condition shall be provided as per manual and the culverts for the crossroads at junctions shall be provided as per the site condition in accordance with the manual. Any increase in number/length/span/height of culverts shall not be considered as COS.
- Floor protection work shall be as specified in the relevant IRC Code and Specification.

- (e) Repairs/replacements of railing/parapets, flooring and protection works of the existing culverts shall be undertaken as follows:

Sl. No.	Location at km	Type of repair required
NIL		

- (f) Floor protection works shall be as specified in the relevant IRC Codes and Specifications.

(iii) Bridges

- (a) Existing bridges to be re-constructed/widened/retain.

- (i) The existing bridges at the following locations shall be re-constructed as new Structures:

Sl. No.	Bridge location (km)	Salient details of existing bridge	Adequacy or otherwise of the existing waterway, vertical clearance, etc*	Remarks
NIL				

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



(ii) The following narrow bridges shall be widened:

Sl. No.	Location (km)	Existing width (m)	Extent of widening (m)	Cross-section at deck level for widening @
NIL				

(b) Additional new bridges

New bridges at the following locations on the Project Highway shall be proposed for new construction in Realignment, bypass & Green field Section. Refer to paragraph 7.3 (ii) of the IRC SP 84-2019 and specified width of carriageway of all new Four lane bridges shall have footpaths left side of the traffic movement. The cross-sectional features shall be as per Fig.7.6 of the IRC SP 84-2019.

Sl. No.	Location (km)	Total length (m)	Remarks, if any
a) Major Bridge			
		Nil	
b) Minor Bridge			
		Nil	

Note: Proposed span arrangement is minimum and the same shall be finalized as per site condition in accordance with the Manual in consent with the concerned authority. Any increase in length/span/height shall not be treated as change in scope of work.

IRC Class Special Vehicle loading shall be taken into account in the structural design of bridges/Flyover/VUP/ROB.

(c) The railings of existing bridges shall be replaced by crash barriers at the following locations:

S. No.	Location at km	Remarks
NIL		

(d) Repairs/replacements of railing/parapets of the existing bridges shall be undertaken as follows:

S. No.	Location at km	Remarks
NIL		

(e) Drainage system for bridge decks

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



An effective drainage system for bridge decks shall be provided as specified in paragraph 7.21 of the IRC SP 84-2019

(f) Structures in marine environment

S. No.	Location at km	Remarks
Nil		

(iv) Rail-road bridges

(a) Design, construction and detailing of ROB/RUB shall be as specified in section 7 of the IRC SP 84-2019

(b) Road over-bridges

Road over-bridges (road over rail) shall be provided at the following level crossings, as per GAD drawings attached, also as per Fig. 7.9 of IRC SP 84-2019:

S. No.	Location of Level crossing (Chainage km)	Length of bridge (m)
Nil		

Note:

- The proposed span arrangement of ROB's are minimum. It may subject to change as per availability of railway boundaries/ requirement of the railways. Any increase in the cost due to change in the span arrangement and total length shall not be treated as change of scope of work.
- ROB's shall be designed, constructed and maintained as per the requirements of Railway authorities. The construction plans shall be prepared in consultation with the concerned railway authority.
- The ROB's shall be constructed and maintained by the Contractor under supervision of the Railways.
- All expenditure related to construction, maintenance and supervision of ROB's (except plan and estimate (P&E) charges) shall be borne by the Contractor.
- During construction, at the location of the existing level crossing, diversion road with level crossing if any shall be suitably provided by the Contractor.

(c) Road under-bridges

Road under-bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

S. No.	Location of Level Crossing (chainage km)	Number and length of span (m)
NIL		

(v) Grade separated structures.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2.9 and 3 of this Annex-I.

(vi) Repairs and strengthening of bridges and structures.

The existing bridges and structures to be repaired/strengthened, and the nature and extent of repairs /strengthening required are given below:

(a) Bridges

Sl. No.	Location of bridge (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

(b) ROB / RUB

Sl. No.	Location of ROB/RUB (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

(c) Overpasses/Underpasses and other structures

Sl. No.	Location of Structure (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

(vii) List of Major Bridges and Structures

The following is the list of the Major Bridges and Structures:

Sl. No.	Location
Nil	

8 Traffic Control Devices and Road Safety Works

(i) Traffic control devices and road safety works shall be provided in accordance with Section 9 of the IRC SP 84-2019.

(a) Traffic Signs:

Traffic signs shall be provided all along the entire Project Highway as per schedule D. All advance direction/destination, reassurance, place identification signs along

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



main road shall be overhead mounted on gantry. Exact location and number of overhead gantry signs to be decided by Contractor in consultation with AE & NHIDCL as per schedule D. The letter size and siting of all signs along main road shall be designed for the minimum design speed. Minimum number of full overhead gantry sign and cantilever overhead gantry sign shall be provided in accordance of manual.

(b) Pavement Marking:

Pavement markings shall cover road marking for the entire Project Highway as per manual.

(c) Safety Barrier:

Semi rigid W-beam crash barriers shall be installed all along the project highway on earthen shoulders on either side of main carriageway except at structures where concrete crash barrier shall be provided. Minimum length of W-beam crash barrier and RCC crash barrier with/ without friction slab shall be provided as per schedule D.

(d) RoW Boundary Wall:

RCC Boundary Wall shall be constructed as per IRC: SP: 84-2019 all along the project highway on both sides at RoW edge.

(ii) Specifications of the reflective sheeting.

All road signs shall be of Prismatic Grade Sheeting corresponding to Class 'C' Sheeting described in IRC: 67 and as described in IRC: SP:84-2019.

9 Roadside Furniture

- (i)** Roadside furniture shall be provided in accordance with the provisions of Section 9 of the IRC SP 84-2019.

Pedestrian Guard Rail: Provide pedestrian guardrail at each bus stop location and other locations as per manual.

- a) Pedestrian crossing: As per manual.
- b) Delineators: As per manual.
- c) LED traffic blinkers: To be provided at all junctions, pedestrian crossings, exits and at other locations as per manual.
- d) Noise barriers: shall be provided in accordance with manual; Locations shall be decided as per site condition in consent with Authority.

- (ii)** Overhead traffic signs: Full width overhead signs and Cantilever signs shall be provided as per IRC SP: 84-2019

10 Compulsory Afforestation

NIL

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



11 Hazardous Locations

Roadside safety barriers shall be provided at all locations of hazards such as high embankment, roadside obstacles, sharp curves, Flyover and bridge approaches, overpasses, ROB and any other locations identified in consultation with Authority Engineer during the execution of the project highway.

12 Special Requirements for Hill Roads

Slope Protection

As the project involve cutting of existing hill slopes, it is imperative that slopes are to be stabilized for insuring longevity of the slopes and the roads.

The contractor shall be responsible for accurate assessment of the actual requirement as per schedule D & prepare design for slope protection & stabilization as per schedule D.

Any increase in length over the above will not be considered as change of scope. Therefore, contractor should carry out thorough investigation at site and assess the requirement of slope protection and slide prone zone and other safety features at his own before submission of bid.

Disposal of Debris: - As per Manual.

Retaining Wall/Reinforces Soil Wall (Rs Wall) /Breast Wall

- 1) Protection wall in the form of Breast/Retaining wall/Reinforced soil wall has also been identified and recommended in below section to mitigate landslide during rainy season, the locations of Breast wall / retaining wall/ Reinforced soil wall ((ref. typ. cross-section and standard drawings.) are given below:

a) Breast wall

Sl No	LHS				RHS			
	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
1	61+330	61+440	110	4	61+000	61+060	60	4
2	61+470	61+530	60	4	61+780	62+030	250	6
3	61+610	61+690	80	4	62+070	62+150	80	4
4	62+090	62+160	70	4	62+240	62+650	410	8
5	62+320	62+630	310	8	62+810	63+020	210	4
6	62+820	63+030	210	6	63+400	63+450	50	4
7	63+070	63+930	860	8	63+610	63+710	100	4
8	64+010	64+100	90	8	63+750	63+900	150	6

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
9	64+120	64+460	340	8	64+320	64+350	30	4
10	64+620	64+830	210	8	64+380	64+460	80	4
11	64+860	64+950	90	6	64+890	64+920	30	4
12	64+990	65+020	30	4	65+110	65+160	50	4
13	65+060	65+470	410	6	65+340	65+400	60	4
14	65+540	65+750	210	8	65+580	65+700	120	4
15	65+820	66+670	850	8	65+840	65+960	120	4
16	66+740	66+980	240	4	66+030	66+190	160	4
17	67+010	67+210	200	8	66+270	66+390	120	4
18	67+270	67+620	350	6	66+450	66+650	200	4
19	67+650	67+690	40	4	66+760	66+850	90	4
20	67+710	71+720	4010	6	67+050	67+170	120	4
21	72+230	72+270	40	4	67+290	67+360	70	4
22	72+390	72+450	60	4	67+410	67+500	90	4
23	73+090	73+190	100	4	67+540	67+610	70	4
24	73+410	73+990	580	6	67+740	67+770	30	4
25	74+050	74+100	50	4	67+800	67+880	80	4
26	74+180	74+320	140	4	68+090	68+130	40	4
27	74+380	74+420	40	4	68+160	68+190	30	4
28	75+440	75+510	70	4	68+270	68+350	80	4
29	75+560	75+930	370	6	68+420	68+490	70	4
30	75+980	76+780	800	8	68+640	68+680	40	4
31	76+810	76+980	170	8	68+750	68+970	220	4
32	77+040	77+500	460	6	69+020	69+070	50	4
33					69+100	69+120	20	4
34					69+400	69+520	120	4
35					69+590	69+640	50	4

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
36					69+840	69+870	30	4
37					70+190	70+240	50	4
38					70+320	70+440	120	4
39					70+640	70+700	60	4
40					70+820	70+910	90	4
41					71+010	71+110	100	4
42					71+910	72+040	130	4
43					72+140	72+370	230	4
44					72+740	72+900	160	4
45					72+960	73+300	340	8
46					73+340	73+640	300	4
47					73+820	74+180	360	6
48					74+450	74+860	410	4
49					75+440	75+470	30	4
50					76+070	76+100	30	4
51					76+900	76+930	30	4
52					77+180	77+230	50	4
Total Length=			11650				6070	

Note: The proposed locations are minimum and any change in length/height shall not be treated as change in scope of work.

- 1) Breast walls have been proposed under 2 scenarios - a) At built-up areas to restrict the width of cutting and thus the requirement of ROW b) At high cutting locations. The height of breast walls is considered as per site requirement. In general, PCC/RRM (in Cement Mortar 1:4) breast wall shall be provided for the height of 5m max, whereas Gabion/RCC breast wall shall be provided for more than 5m.
- 2) The protection on hill side in free fall embankment using erosion control blankets component of vegetation over erosion control/ coir blanket with "U" shaped hook and steel wire mesh shall be executed above Breast wall / as per site condition in consultation with Authority/IE.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



- 3) Cut Slope using Erosion Control Blankets Compartment System is proposed for area of **138910sqmt** in **10440m** length.
- 4) 10% of total cutting slope length using erosion control blankets compartment system shall also be executed with soil nailing provision due to Weak Mountain / landslides zone as per site condition in consultation with Authority/IE.

b) Retaining wall

Retaining walls are permanent structures usually built at the toe of the slope or at shoulder edge to resist lateral pressure due to existing soil, earth filling, back fill, water pressure etc. Retaining walls have been proposed, a) where the existing ground is steep, and embankment is not feasible b) to restrict the formation width at ROW constraint location, the location is as below,

LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
1	61+030	61+080	50	4	61+230	61+350	120	8
2	61+290	61+320	30	5	63+030	63+060	30	7
3	62+640	62+700	60	6	64+090	64+120	30	5
4	74+600	74+640	40	5	65+480	65+530	50	8
5					67+000	67+030	30	4
6					68+370	68+400	30	5
7					69+140	69+170	30	6
8					70+460	70+540	80	3
9					71+150	71+200	50	3
10					71+490	71+540	50	6
11					71+820	71+890	70	6
12					74+220	74+280	60	3
13					75+770	75+810	40	3
14					76+520	76+550	30	3
15					77+110	77+150	40	3
Total Length=			180				740	

Note: 1. The proposed locations are minimum and any change in length and height shall not be treated as change in scope of work.

2. The height of retaining walls is considered as per site requirement. In general,

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



PCC/RRM (in Cement Mortar 1:4) retaining wall shall be provided for the height of 5m max, whereas RCC retaining wall shall be provided for more than 5m.

c) Reinforced Soil wall (RS Wall)

Geologically the project area comprises of rocks from the oldest Precambrian gneissic complex to the recent alluvium formations. Hence in valley region where more filling is required, a Reinforced Soil slope (RS Slope protection) and Reinforced soil Wall (RS wall) as per the drawings enclosed, is to be provided as below.

LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
1	61+740	61+810	70	9	64+960	64+990	30	10
2	65+490	65+520	30	9	68+510	68+550	40	10
3	71+760	71+960	200	12	69+690	69+720	30	9
4	72+050	72+140	90	9	69+990	70+160	170	10
5	72+600	72+680	80	9	70+250	70+290	40	9
6	72+890	72+960	70	9	72+520	72+690	170	9
7	74+120	74+170	50	9	76+140	76+270	130	9
8	74+800	74+900	100	9	76+770	76+820	50	10
9	75+140	75+170	30	9				
Total Length=			720				660	

Note: The proposed locations are minimum and any change in length and height shall not be treated as change in scope of work.

d) Reinforced Soil Slope

Reinforced Soil slope (RS slope) shall be given on valley side on following locations.

LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
1					62+670	62+800	130	15
2					63+930	64+000	70	18
3					64+540	64+670	130	16
4					65+740	65+800	60	20
5					65+980	66+010	30	23
6					66+670	66+730	60	14
7					67+200	67+280	80	16

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



LHS					RHS			
Sl No	Chainage (m)		Length (m)	Height (m)	Chainage (m)		Length (m)	Height (m)
	From	To			From	To		
8					70+710	70+800	90	13
9					70+920	71+000	80	14
10					71+290	71+390	100	15
11					71+590	71+660	70	13
12					74+890	75+110	220	20
14					75+510	75+580	70	17
15					75+900	76+010	110	13
16					76+980	77+060	80	30
Total Length=							1380	

Note: The proposed locations are minimum and any change in length and height shall not be treated as change in scope of work.

The protection on valley side in free fall embankment using erosion control blankets component of vegetation over erosion control coir blanket of 6 mm thick laid over topsoil and anchored with "U" shaped G.I. hook 300x100 mm 1no/sqm, layer of organic manure and soil conditioner over topsoil layer /good earth layer of 100 to 150 mm thick shall also be executed as per site condition in consult with Authority/IE. The total fill slope using Erosion Control blanket system has been quantified for area of **2620sqmt** in **900m** length.

(B) RAINWATER HARVESTING

- As per Ministry of Environment and Forests Notification, New Delhi dated 14.01.1997 (as amended on 13.01.1998, 05.01.1999 & 6.11.2000), the construction of Rainwater, harvesting structure is mandatory in and around Water Crisis area, notified by the Central Ground Water Board.
- Rainwater harvesting structures shall be provided at every 1000m on either side.
- Rainwater harvesting structure shall be provided as per IRC: SP:42-2014 (Guideline for road drainage) and IRC: SP:50-2013 (Guidelines on Urban Drainage)

13 Change of Scope

The number, length and height/width of Structures and bridges specified hereinabove shall be treated as an approximate assessment. The actual numbers, lengths and sizes as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule- B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of Article 13.

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



14 Utility Shifting

Shifting of obstructing existing utilities indicated in Schedule A to an appropriate location in accordance with the standards and specifications of concerned Utility Owning Department is part of the scope of work of the Contractor. The bidders may visit the site and assess the quantum of shifting of utilities for the projects before submission of their bid. The specifications of concerned Utility Owning Department shall be applicable and followed.

Note-I:

(a) The type/ spacing/ size/ specifications of poles/ towers/ lines/ cables to be used in shifting work shall be as per the guidelines of utility owning department and it is to be agreed solely between the Contractor and the utility owning department. No change of scope shall be admissible and no cost shall be paid for using different type/ spacing/ size/ specifications in shifted work in comparison to those in the existing work or for making any overhead crossings to underground as per requirement of utility owning department and/or construction of project highway. The Contractor shall carry out joint inspection with utility owning department and get the estimates from the utility owning department. The assistance of the Authority is limited to giving forwarding letter on the proposal of Contractor to utility owning department whenever asked by the Contractor. The decision/ approval of utility owning department shall be binding on the Contractor.

(b) The supervision charges at the rates/ charges applicable of the utility owning department shall be paid directly by the Authority to the Utility Owning department as and when Contractor furnishes demand of Utility Owning Department along with a copy of estimated cost given by the later.

(c) The dismantled material/scrap of existing Utility to be shifted/ dismantled shall belong to the Contractor who would be free to dispose-off the dismantled material as deemed fit by them unless the Contractor is required to deposit the dismantled material to utility owning department as per the norm and practice and in that case the amount of credit for dismantled material may be availed by the Contractor as per estimate agreed between them.

(d) The utilities shall be handed over after shifting work is completed to Utility Owning Department to their entire satisfaction. The maintenance liability shall rest with the Utility Owning Department after handing over process is complete as far as utility shifting works are concerned.

Note II: - Copy of Utility shifting plan enclosed.

14.1 Details of proposed Utilities Schedules

Utilities Relocation Plan and its Schedule initially prepared by DPR consultant followed by joined verification with P&E&PHE department in presence of NHIDCL

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



officers dully certified, details as shown below.

14.2 Electrical Utilities

The Site includes the following Electrical Utilities: -

(a) Extra High-Tension Lines (EHT Lines)

Extra High-Tension Lines (EHT LINES 132KV)										
Sl. No.	Chainage (km)		Circuit (TC/DC/SC)	Crossing (Nos.)		Poles		Conductor (Line length)		Size of cable
	From	To		Overhead	Under-ground	Tower Truss / Uni-pole	No.	KM	Size	
1	74+000	75+000	SC	1	-	Tower	1	0.5	Not Available	Not Available
2	75+000	75+500	SC	1	-	Tower	1	0.25	Not Available	Not Available
3			SC	1		Tower	1			

Note: TC-Triple Circuit, DC-Double Circuit, SC-Single Circuit, U/G-Underground

(b) High Tension/Low Tension Lines (HT/LT Lines)

High Tension Lines (HT33KV LINES)													
Sl. No.	Chainage (km)		Circuit (TC/DC/SC)	Pole		Conductor (Length of line)		Cable		Crossings (Nos.)		Transformer	
	From	To		Type	Nos.	KM	Size	KM	Size	U/G	Overhead	Capacity KVA	Nos.
1	62+000	63+000	DC	Rail poles/ Jose poles	2	0.12	N/A	0.12	N/A		1		
2	73+000	74+000	DC	Rail poles/ Jose poles	3	0.2	N/A	0.2	N/A				
3	76+000	76+500	DC	Rail poles/ Jose poles	No pole only crossing	0.1	NA	0.1	N/A		1		

Note: TC-Triple Circuit, DC-Double Circuit, SC-Single Circuit, U/G-Underground

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



(c) Low Tension Lines (LT Lines)

S. no.	Types OF Line	Chainage (km)		Circuit (TC/DC/SC)	Pole		Conductor (Length of line)		Cable		Crossings Nos.	
		From	To		Type	Nos.	Km.	Size	Km.	Size	U/G	Over head
1	LT 11 KV	61+000	62+000		Jose pole/ Rail pole	3	*0.35	N/A	*0.35	N/A		2
2		62+000	62+500			1	*0.10	N/A	*0.1	N/A		
3		67+000	68+000			2	*0.08	N/A	*0.08	N/A		1
4	LT 440V	61+000	62+000		GI pole	7	*0.28	N/A	*0.28	N/A		
5		71+000	72+000			6	*0.20	N/A	*0.2	N/A		

Note: TC-Triple Circuit, DC-Double Circuit, SC-Single Circuit, U/G-Under grounds.

14.3 Public Health Utilities (Water/Sewage Pipelines)

(a) The Site includes the following Public Health Utilities: -

Sl. No.	Chainage (km)		Type of Lines, Pressure/under Gravity	Pipe			Sluice Valves	Crossings		Remarks
	From	To		Type	No.	Size		Nos.	Length	
1	61+000	61+150		Galvanized Iron	1	50mm				
2				Galvanized Iron	8	20mm				House connection
3	61+500	62+000		Galvanized Iron	1	40mm		1	60 Meter	
4	61+500	61+900		Galvanized Iron	1	50mm		1	60 Meter	
5	62+000	62+500		Galvanized Iron	1	50mm				

(b) Bore well/Hand Pump within ROW – Nil

(c) Water Tank –

Sl. No.	Chainage (km)	Remarks
---------	---------------	---------

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



1	61+500	Capacity; 3 Lakh
2	61+840	capacity; 2 Lakh

14.4Any Other Lines

No.

- 15 **Utility Duct: 30nos.** (NP-4 class) of 1.0m dia. has been provided cross the project highway.




Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Typical Cross-section along the Project Highway

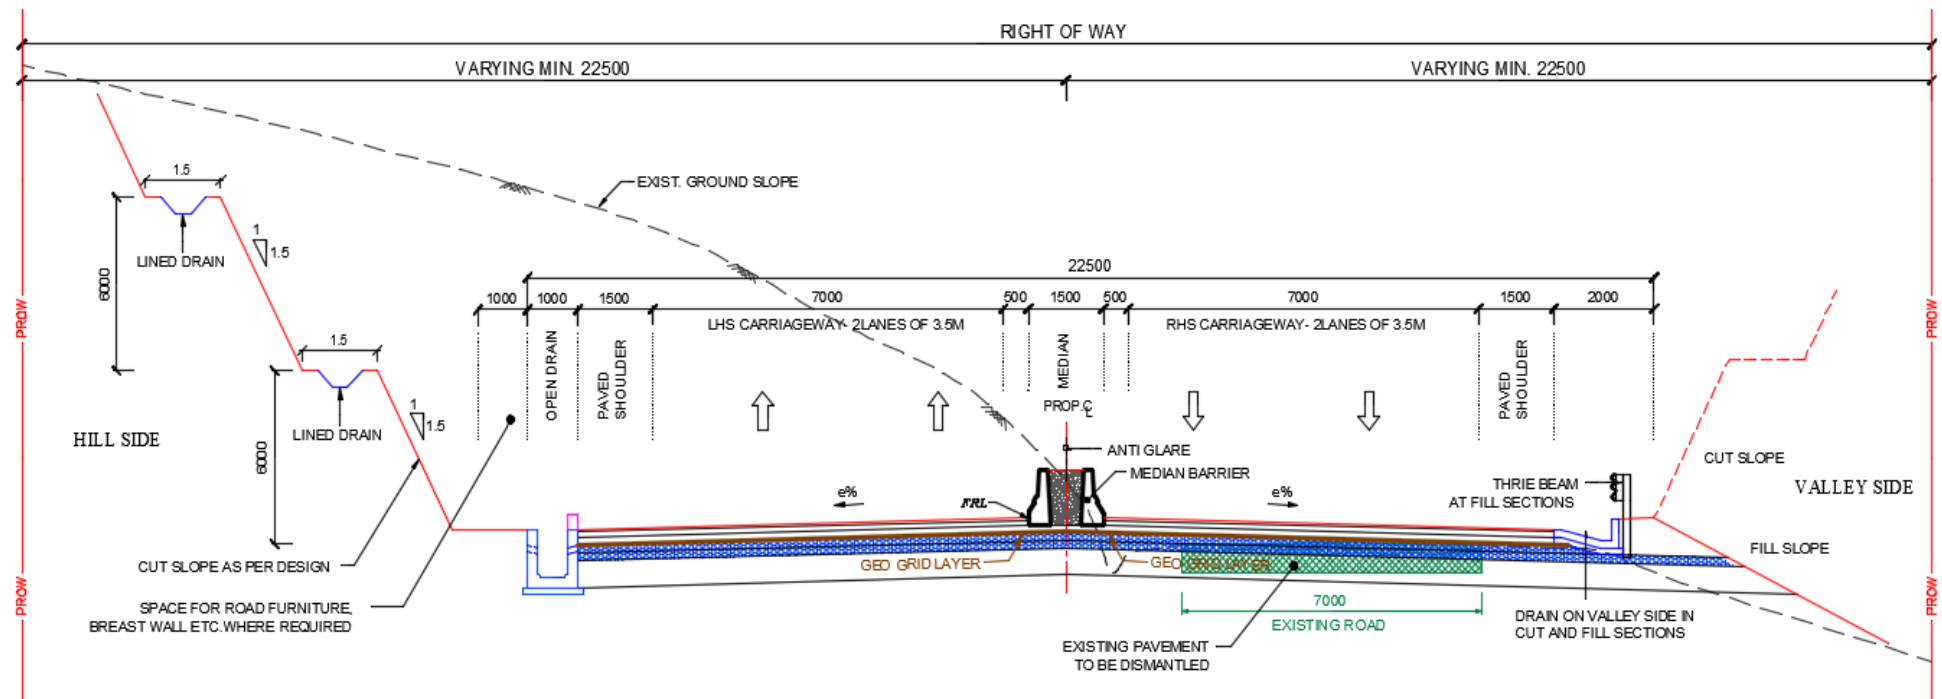


TCS-1: 4-Lane Divided Highway at same level with raised median on existing



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

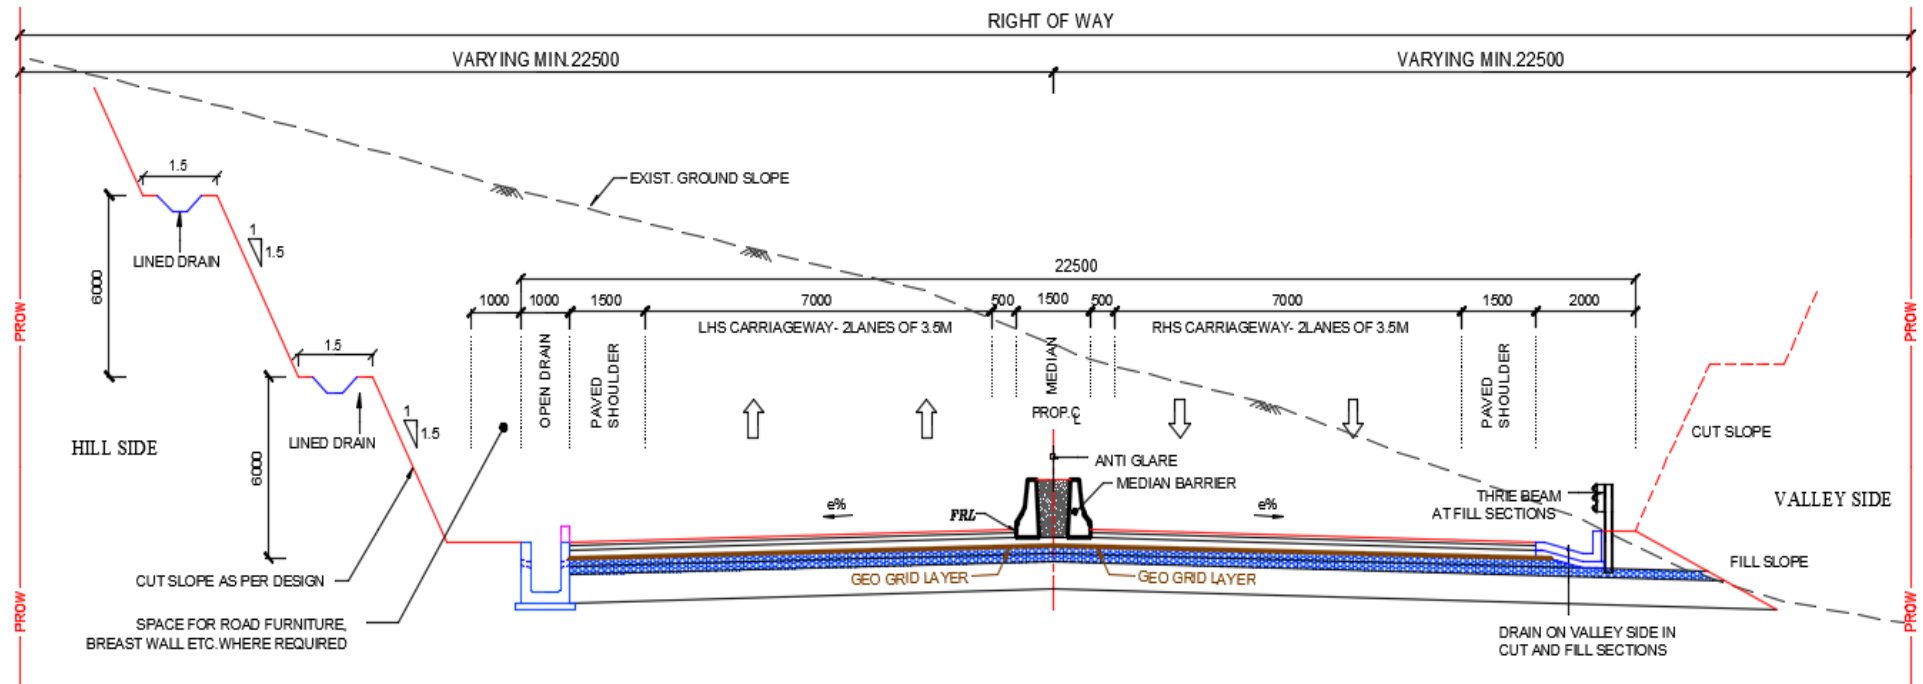


TCS-2: 4-Lane Divided Highway at same level with raised median at Bypass/ Realignment



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

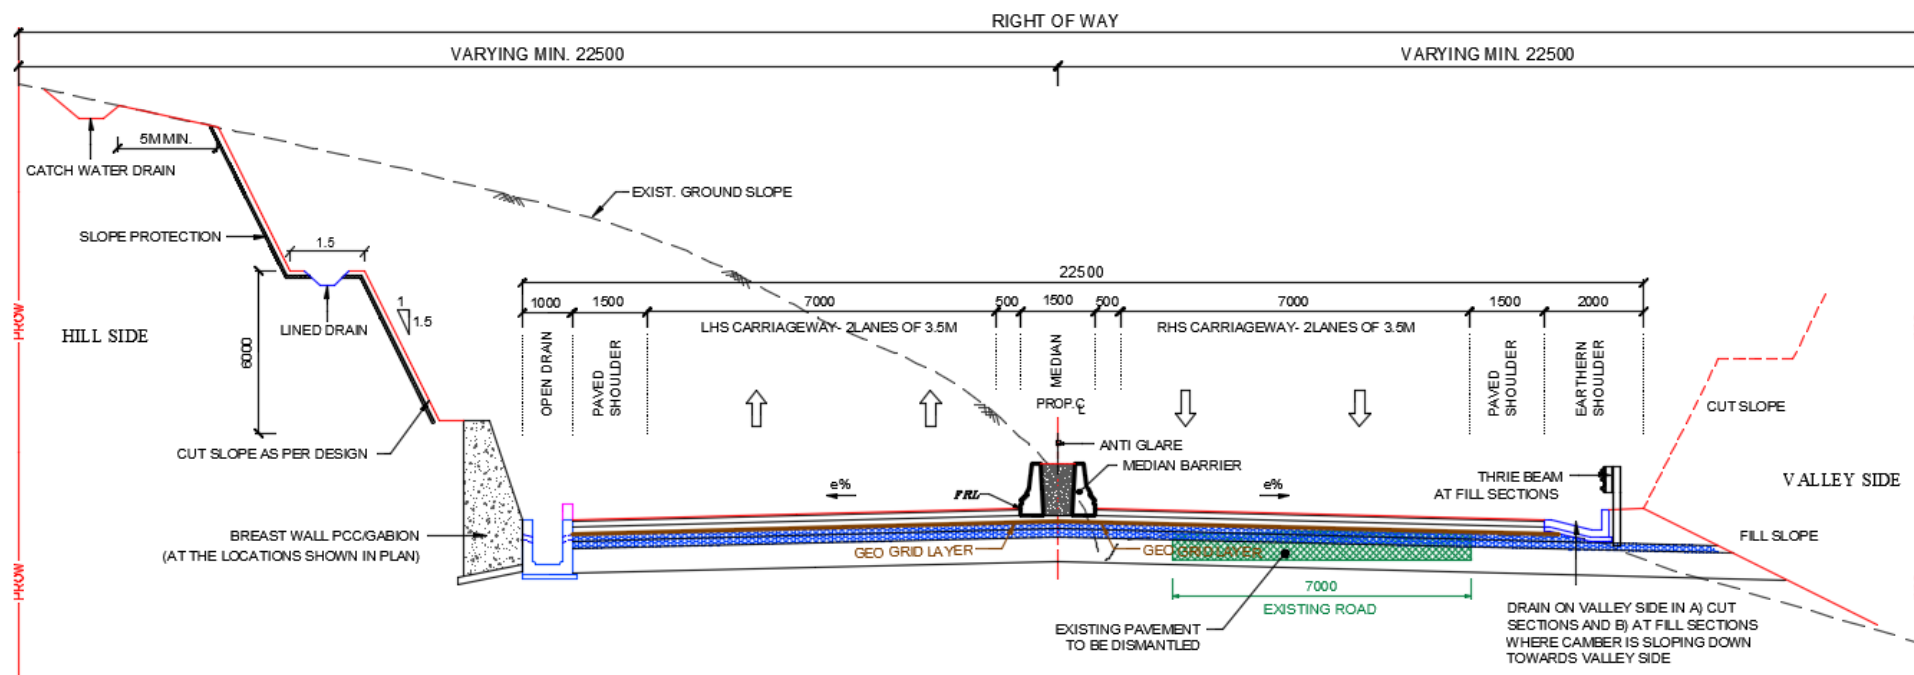


TCS-3: 4-lane divided highway with Breast Wall on Hill Side and Cut/Fill on Valley side (at existing road locations)



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

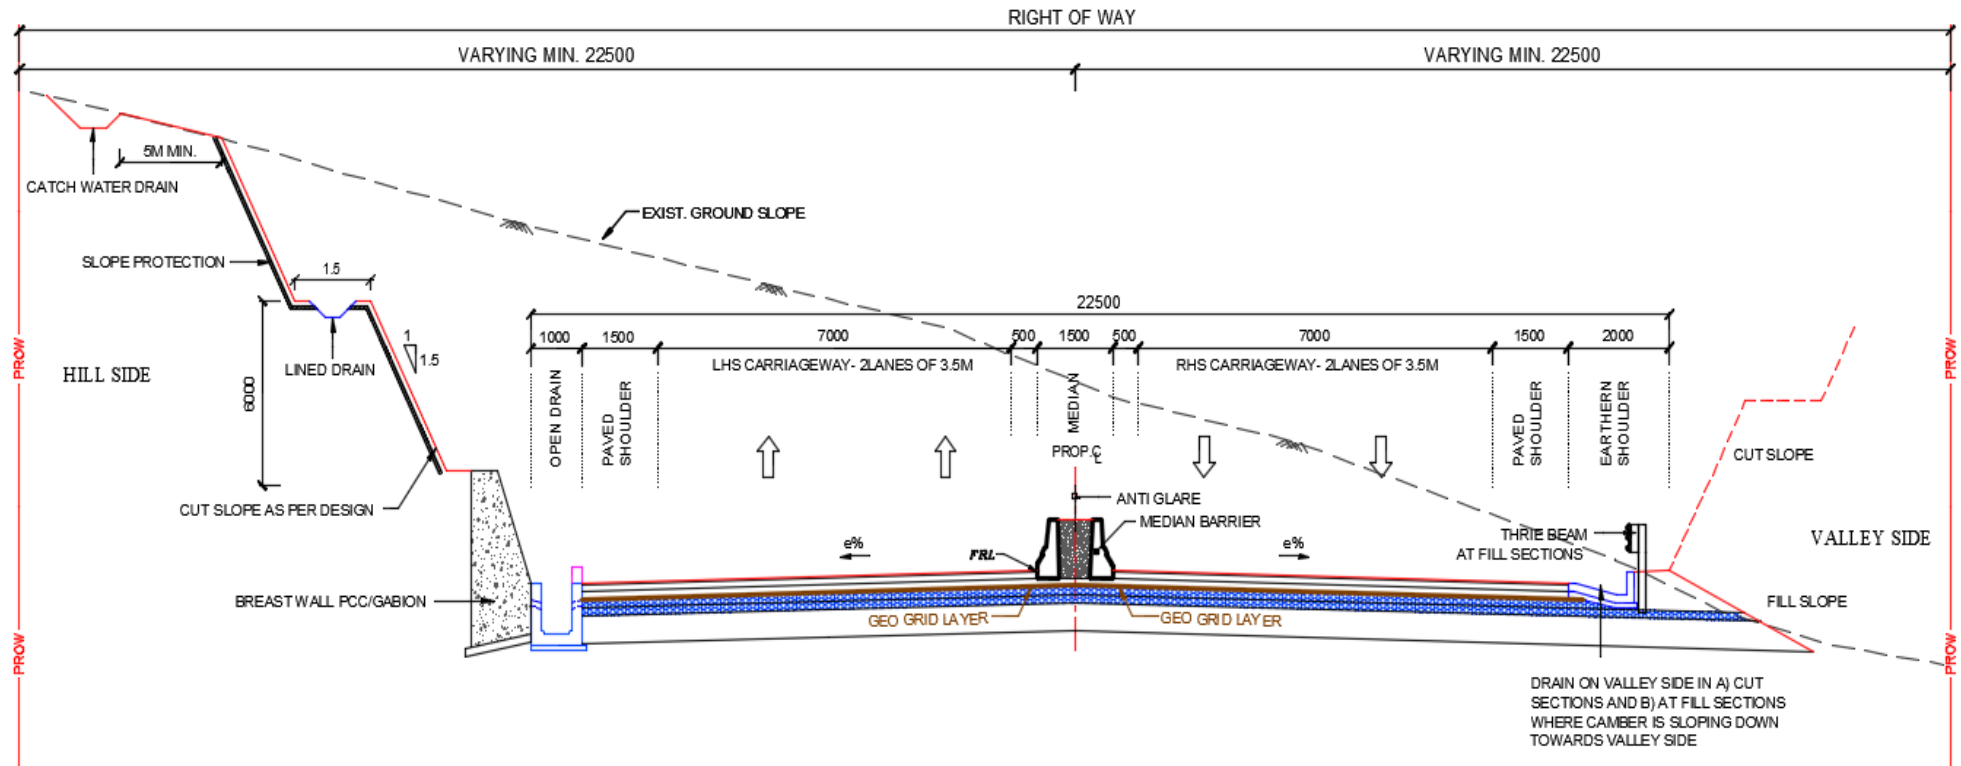


TCS-4: 4-lane divided highway with Breast Wall on Hill Side and Cut/Fill on Valley side (Bypass/Re-alignment locations)



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

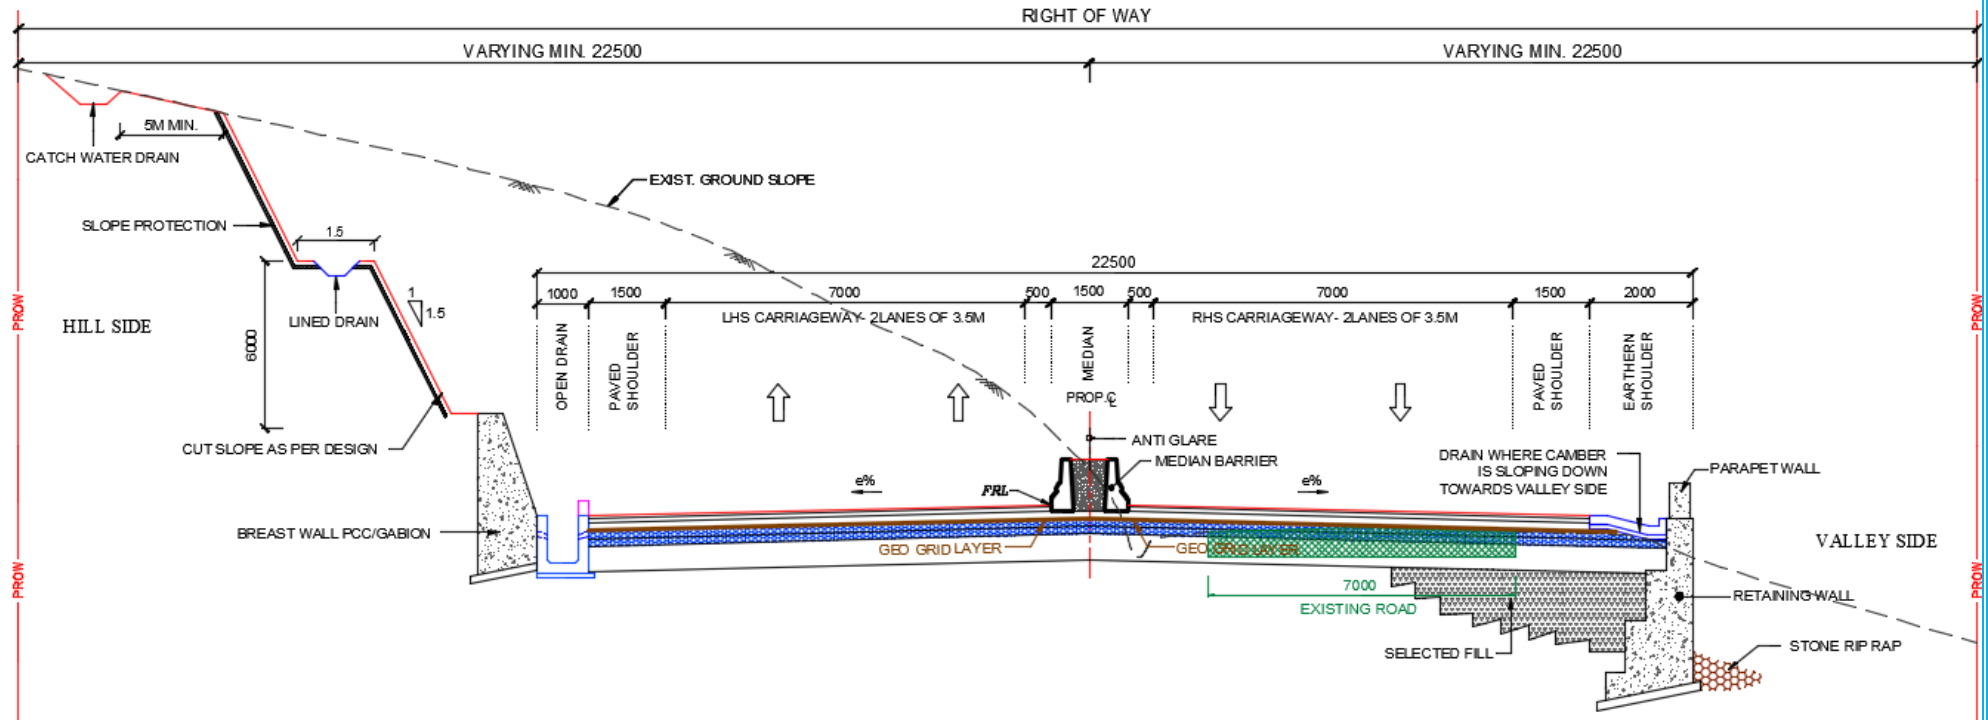


TCS-5: 4-lane divided highway with Breast Wall on Hill Side and Retaining Wall on Valley side (at existing road locations)



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

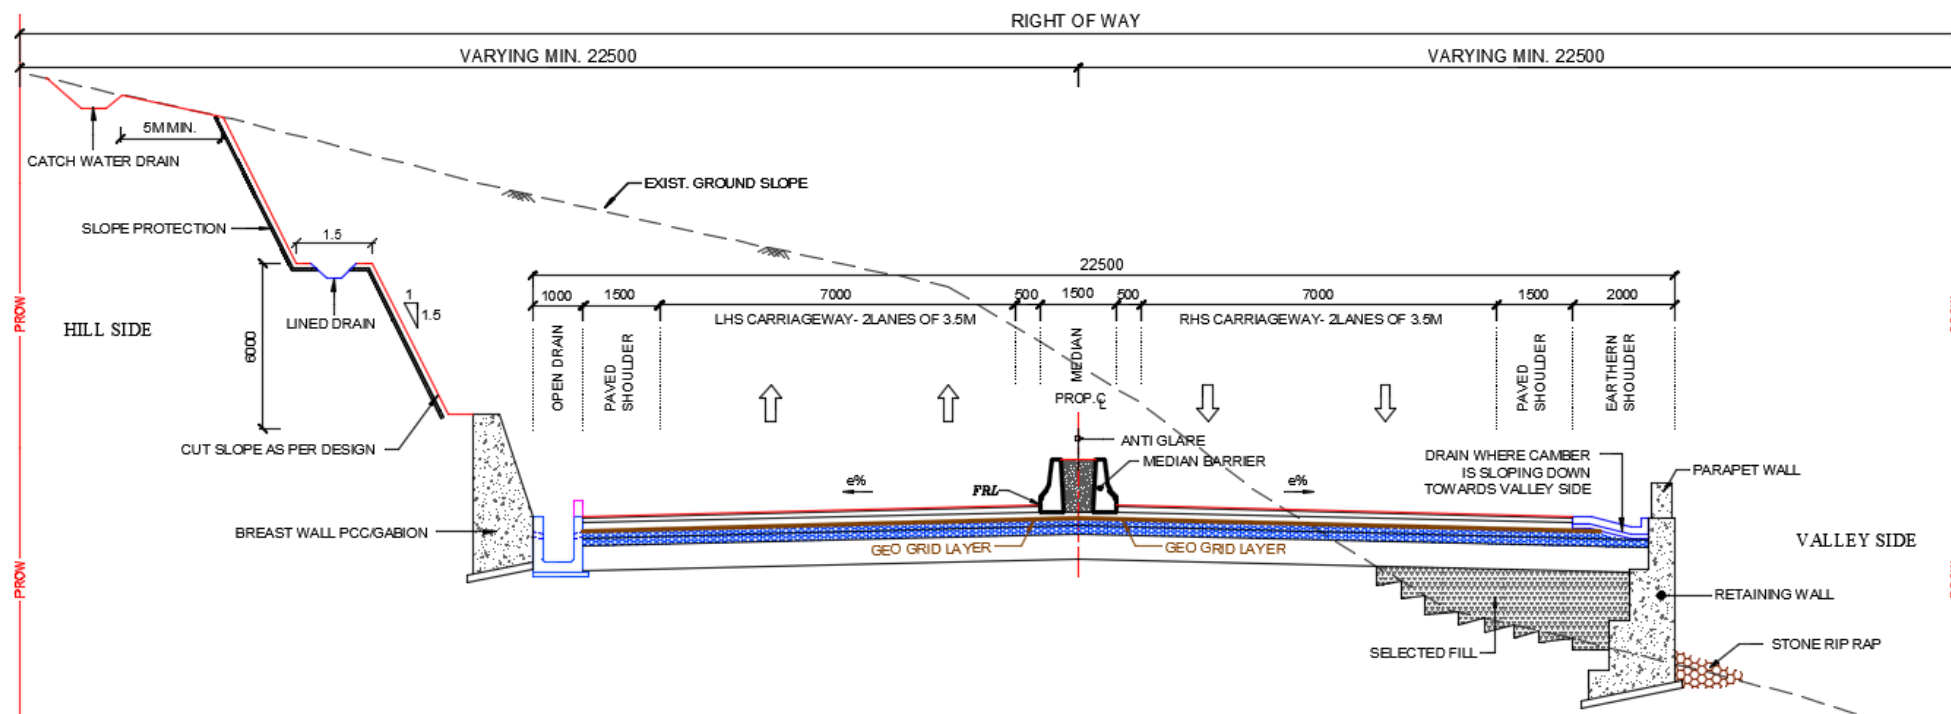


TCS-6: 4-lane divided highway with Breast Wall on Hill Side and Retaining Wall Valley side and (Bypass/Re-alignment locations)



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

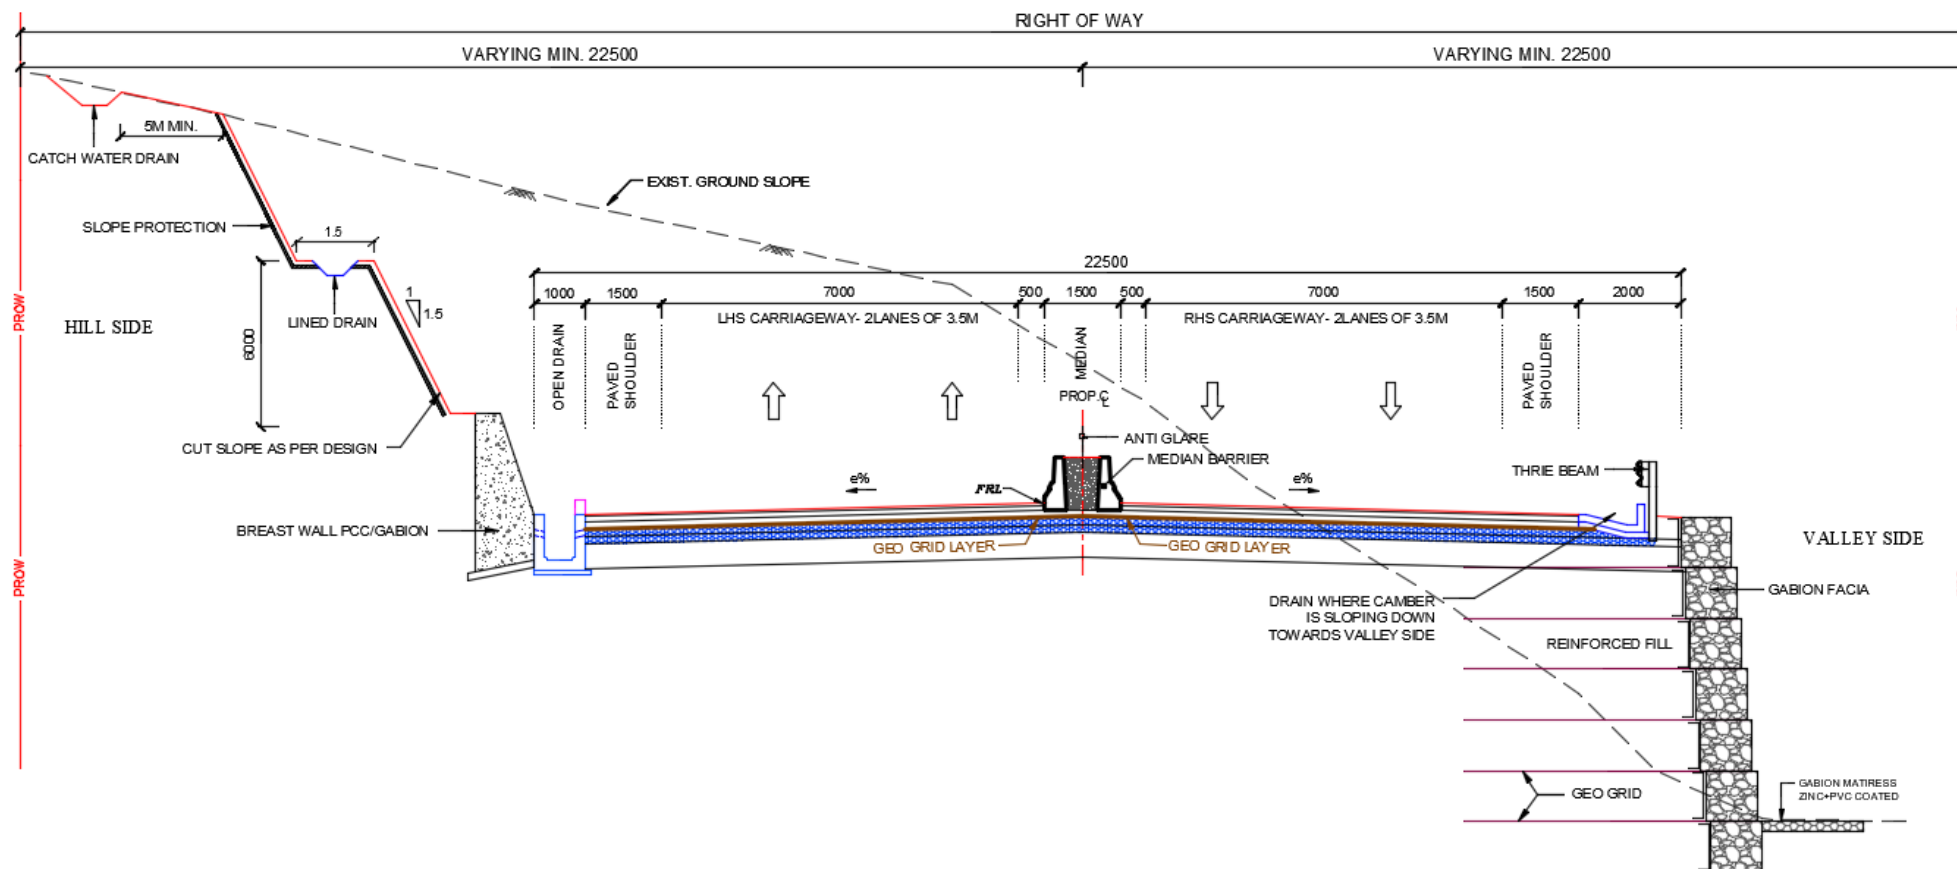


TCS-7: 4-lane divided highway with Breast Wall on Hill Side and Reinforced Soil Wall on Valley side



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

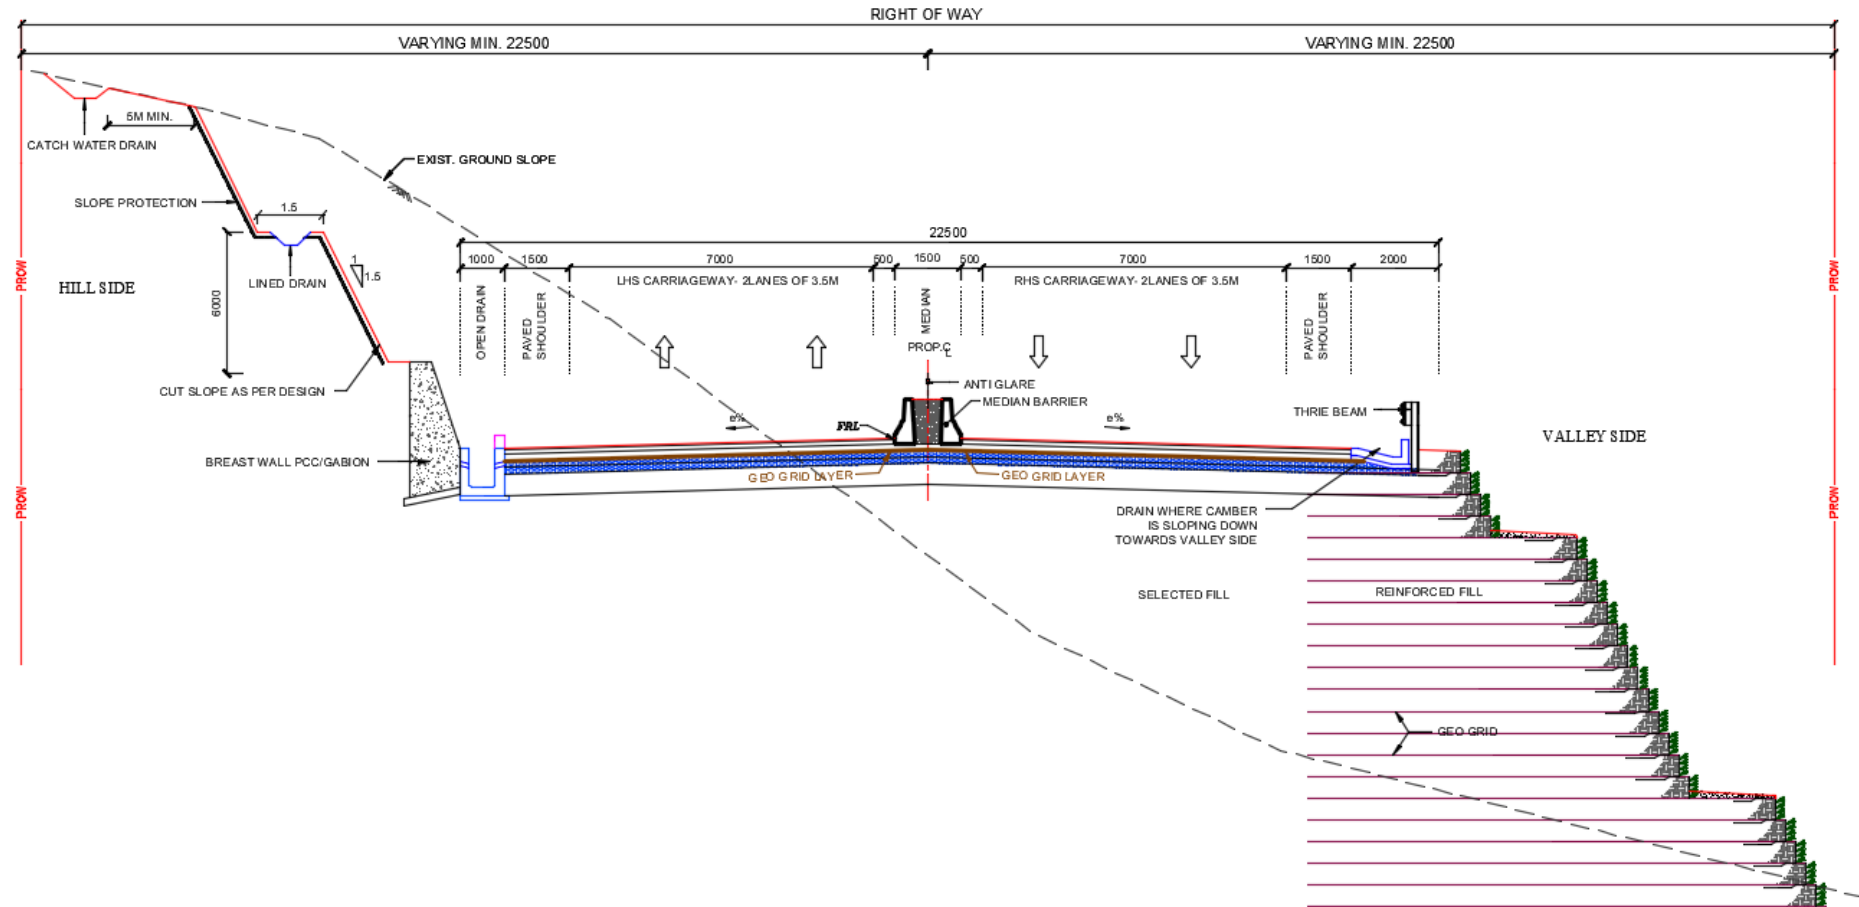


TCS-8: 4-lane divided highway with Breast Wall on Hill Side and Reinforced Soil Slope on Valley side



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

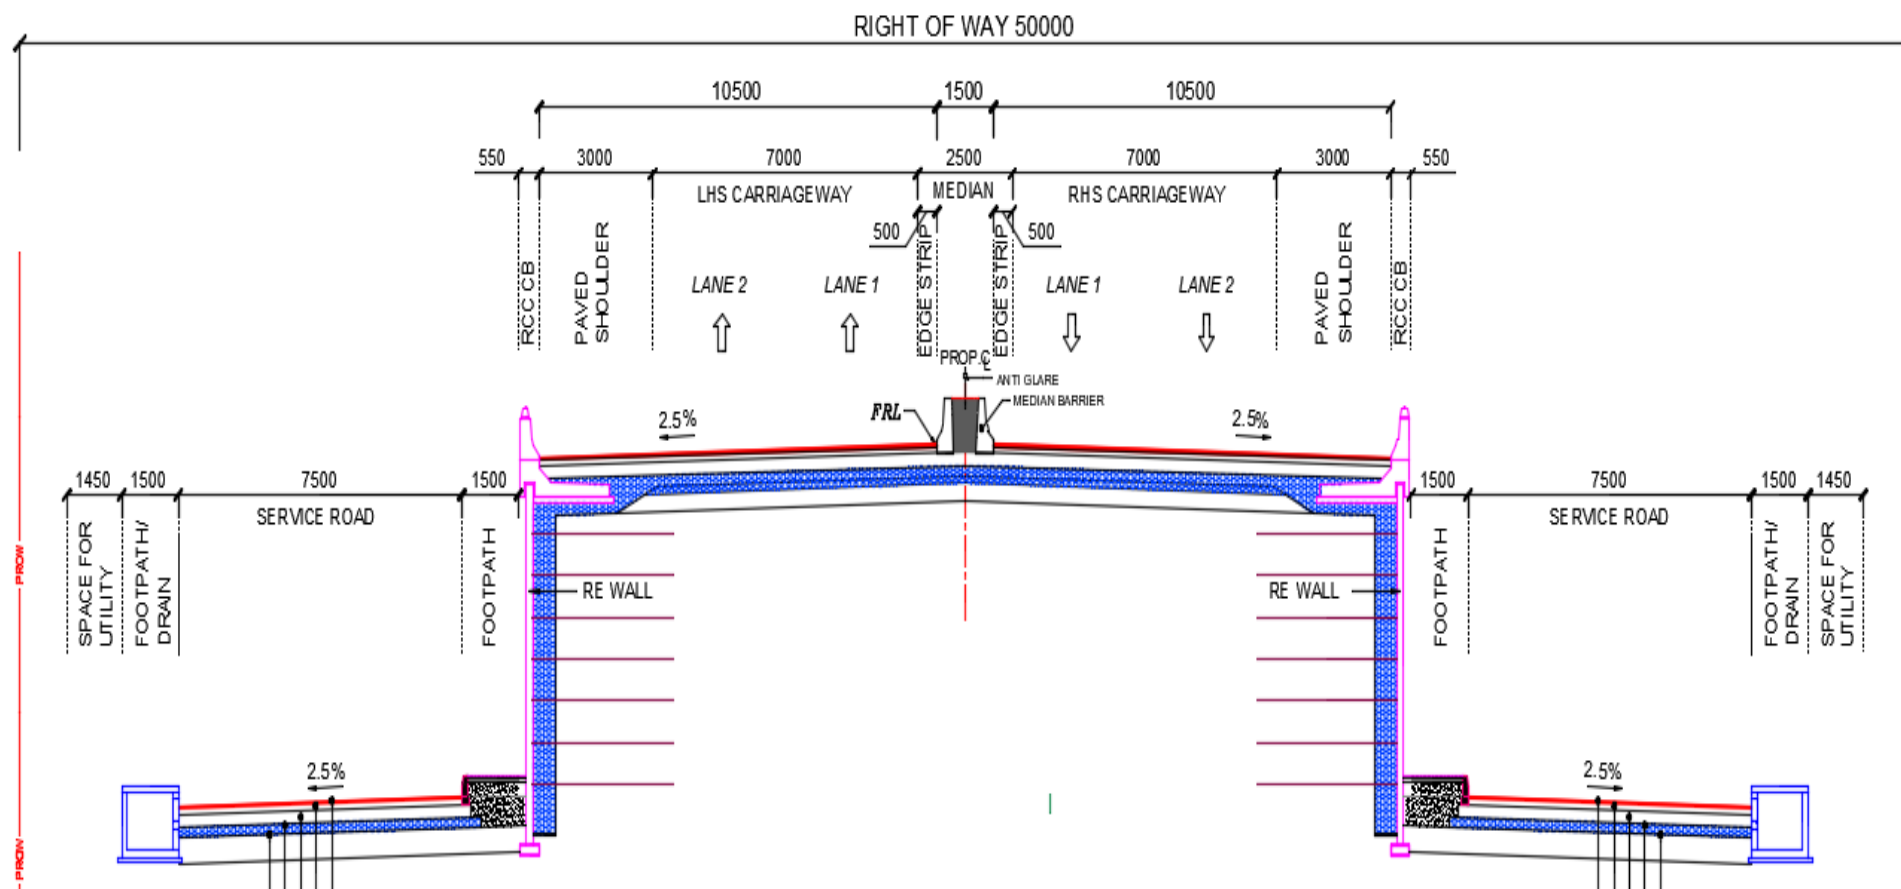


TCS-9: 4-lane Approach of (Flyover & SVUP) with 7.5m wide Service Road and RCC Drain on both side



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

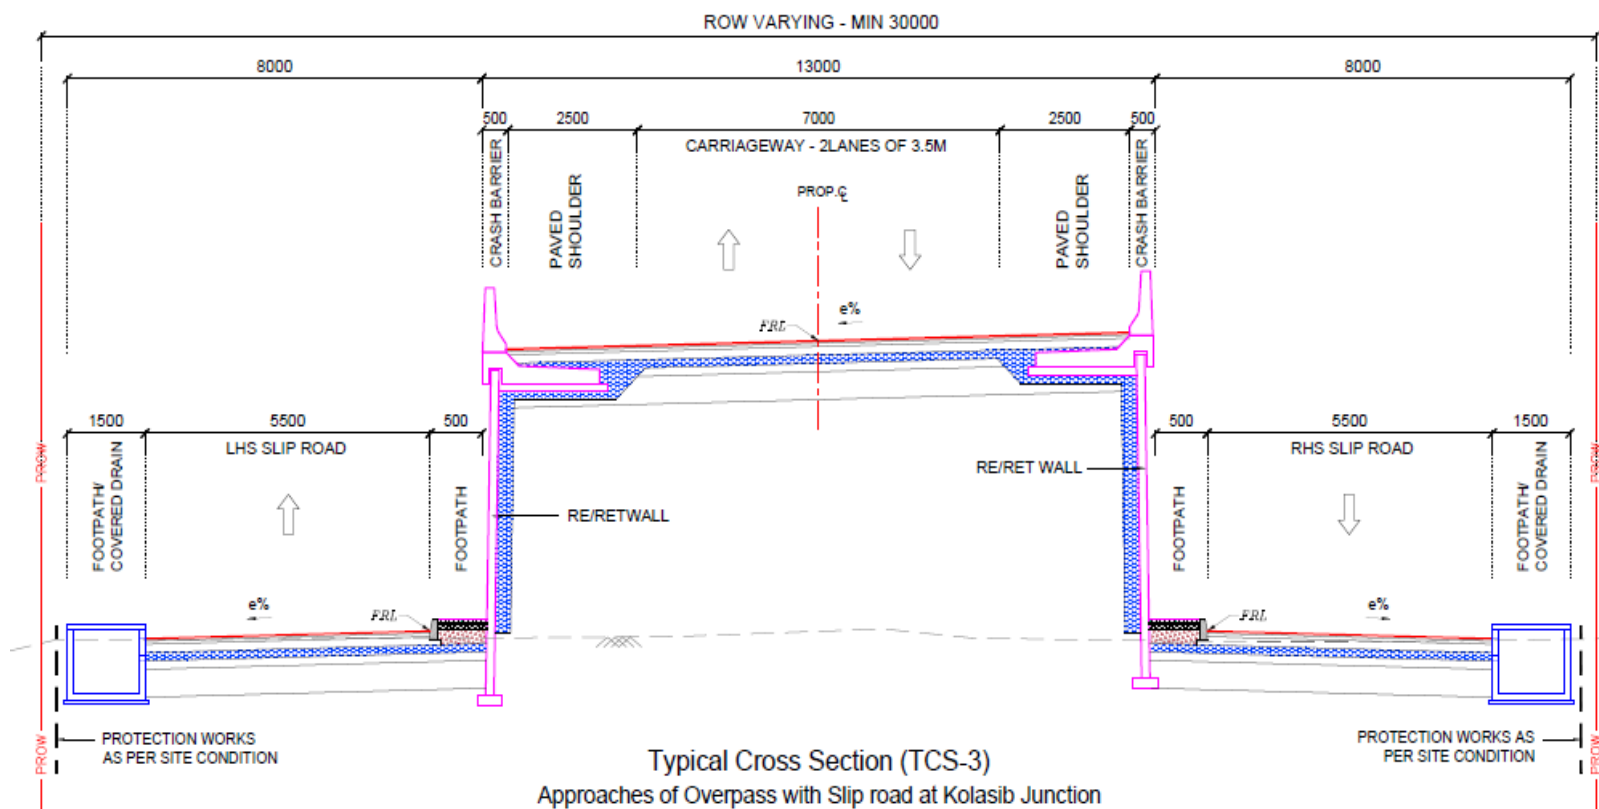


TCS-10: Approaches of Overpass with Slip road




Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

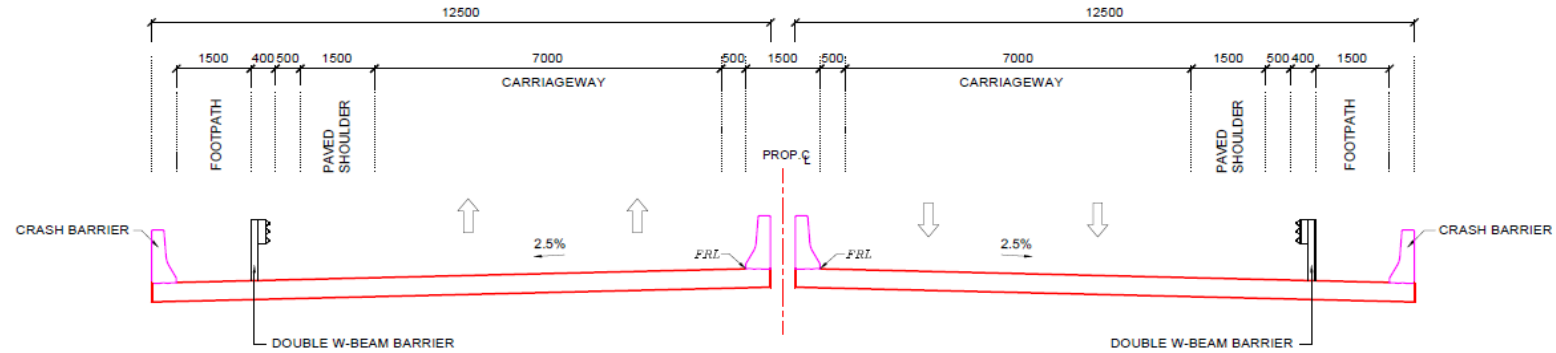

TCS-11: 4-Lane Bridge at deck Level with Footpath

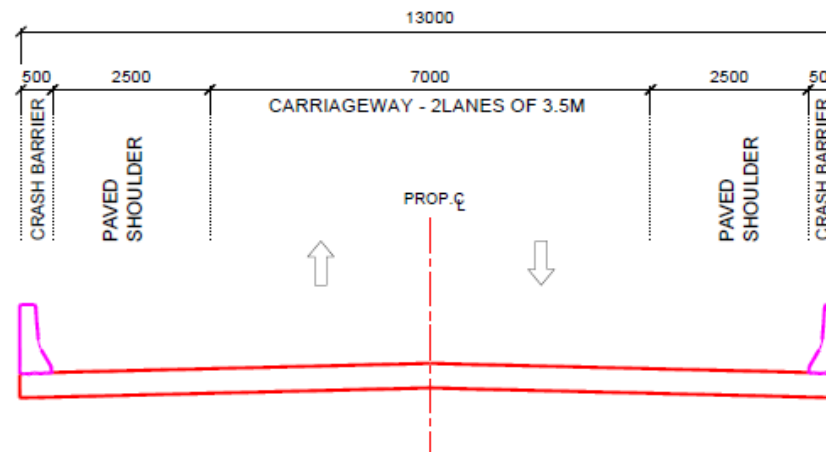

TCS-12: Overpass at deck level

Schedule-C

SCHEDULE - C

(See Clause 2.1)

PROJECT FACILITIES

1 Project Facilities

The Contractor shall construct the Project Facilities in accordance with the provisions of this Agreement. Such Project Facilities shall include:

- (a) Toll plazas.
- (b) Traffic Control Device/Road Safety Device/Roadside furniture.
- (c) Pedestrian facilities.
- (d) Land Scaping and Tree Plantation.
- (e) Truck lay-byes.
- (f) Wayside amenities.
- (g) Bus-bays and Passenger shelters.
- (h) Building for traffic aid post
- (i) Building for medical aid post
- (j) Others.

2 Description of Project Facilities

Each of the Project Facilities is described below:

(a) Toll Plaza location

Toll Plaza location is mentioned below – Toll Plaza shall be provided as per as stipulated in section 10 of IRC Manual viz IRC-SP-84, 2019. Canopy of Toll Plaza should be designed to withstand load of solar panels in addition to other design loads. There should be facility for toilet (ladies and gents separately) and dustbins, and their appropriate number shall be finalized in consultation with Authority engineer.

S. No.	Design Chainage			Lanes
	From (km)	To (km)	Length (km)	
01	72+175	72+425	250	4+4(8 Lane)

Note:

- All toll plaza premises shall be fenced with stone masonry boundary wall with minimum 6ft height from OGL.
- All lanes should be ETC lane with provision of medium speed WIM with bending plate technology in each lane, and Static Weigh Bridge (one lane in each direction) at Toll Plaza and Configuration with Advance Traffic Management System.
- Above mentioned toll lanes are minimum. However, the actual requirement of toll lanes shall be assessed by Contractor as per actual site condition and Manual. The increase in number of toll lanes shall not be treated as change of scope.
- Solar panels shall be erected over the Toll Plaza Canopy to generate the green energy. Same shall be utilized for toll plaza lighting and other energy requirement within toll plaza area along with conventional lighting.

(b) Roadside furniture

Traffic Control Device/Road Safety Device/Roadside furniture as per provisions of manual shall be provided. Yellow flashing lights using solar power with full alternative power back-up shall be provided at all junctions/pedestrian crossings/hazardous locations etc

- i. **Traffic Signs** - Traffic signs include roadside signs, overhead signs and kerb mounted signs along the entire Project highway.
- ii. **Pavement Marking** - Pavement marking shall cover road marking for the entire Project highway as per the IRC SP 84-2019.
- iii. **LED Traffic Blinkers:** LED traffic blinker signal provided for entire project.
- iv. **Roadside Furniture:** Traffic Signs and pavement markings shall include roadside signs, overhead signs, curve mounted signs and road marking along the project highway. The locations for these provisions shall be finalized in consultation with Independent Engineer.
- v. **Crash barrier** - Provide W-beam crash barrier along the Project highway in accordance with Schedule D and at locations given below.

LHS				RHS		
Sl No	Chainage (m)		Length (m)	Chainage (m)		Length (m)
	From	To		From	To	
1	61+000	61+040	40	61+090	61+450	360
2	62+180	62+300	120	62+180	62+230	50
3	71+740	72+160	420	62+660	62+800	140
4	72+290	72+330	40	62+900	62+920	20
5	72+500	73+080	580	62+980	63+080	100
6	73+200	73+400	200	63+710	63+750	40
7	74+120	74+170	50	63+910	64+130	220
8	74+600	75+390	790	64+500	65+070	570
9				65+200	65+310	110
10				65+470	65+570	100
11				65+730	65+810	80
12				65+970	66+020	50
13				66+660	66+760	100
14				66+870	67+040	170
15				67+200	67+280	80
16				67+380	67+410	30
17				67+690	67+720	30

LHS				RHS		
Sl No	Chainage (m)		Length (m)	Chainage (m)		Length (m)
	From	To		From	To	
18				67+980	68+020	40
19				68+370	68+410	40
20				68+500	68+570	70
21				68+810	68+870	60
22				69+130	69+180	50
23				69+680	70+290	610
24				70+460	70+620	160
25				70+710	70+800	90
26				70+910	71+000	90
27				71+150	71+200	50
28				71+290	71+400	110
29				71+490	71+690	200
30				72+510	72+690	180
31				74+220	74+400	180
32				74+880	75+320	440
33				75+500	77+500	2000
Total Length (m)			2240			6620

Note: The above proposed locations are minimum. Crash barrier/other suitable safety barriers along the Project highway shall be provided as per Schedule D. Any change in length shall not be treated as change in scope of work.

- vi. Traffic Safety Devices wherever required.**
- vii. MS Railing** - MS Railing along the Project highway at the location as suggested in Schedule D.
- viii. Delineators** - Shall be provided as per IRC: 79-1981 and requirements & specifications as per Schedule D.
- ix. Boundary Stones** - For Entire Project highway at 200m interval.
- x. KM Stones and Hectometer Stone** - For Entire Project highway.

(c) Location of Pedestrian facilities:

Pedestrian Guard rails shall be provided at junctions, Truck lay byes, bus bays and near schools and hospitals as per provisions in section 12.2 of the Manual

- i. Pedestrian guardrail:** Provide pedestrian guardrail at each bus stop location and at other locations as per manual.

- ii. Pedestrian Crossings: Provide pedestrian crossing facilities on locations as recommended in Schedule D.

(d) Landscaping & Tree Plantation

Landscaping and Tree plantation shall be done at Toll Plaza, Major Intersection etc.

(e) Location of Truck lay-bye:

Truck Lay bye shall be provided at the following locations in accordance with section 12.4 of the manual. Truck Lay bye shall be provided at below mentioned locations.

Sl. No	Existing Chainage (km)	Design Chainage (km)	Side (Left/Right)
1	-	62+000	RHS

(f) Bus-bays and Bus shelters table is given below:

As stipulated in section 12.5 of the Manual, Bus-bays and shelters shall be provided at below indicative locations.

Sl. No.	Design Chainage	Side	Name Of Village
1	61+250	LHS	Chhimluang
2	61+550	RHS	Chhimluang
3	71+880	LHS	Bilkawthlir
4	71+880	RHS	Bilkawthlir

Note: Above shown number of locations are minimum, however, the location of bus bays and passenger shelters shall be finalized as per suitability of location and site requirement in consultation with Client. Any change in location shall not treated as change of scope.

(g) Foot Over Bridges:

Foot Over Bridges shall be provided at the following locations:

Sl. No.	Existing Chainage	Type of Junctions
1	61+912	T
2	68+962	Y
3	71+200	Y
4	72+551	T
5	73+458	Y
6	74+779	T
7	78+050	Y

(h) Buildings for Traffic Aid Posts

The Contractor shall, in accordance with the type designs prescribed for such police outpost buildings by the State Government or a substitute thereof, construct buildings not exceeding 25 (twenty-five) square meters of plinth area, for each of the Traffic Aid Posts, and hand them over to the Authority no later than 30 (thirty) days prior to the Scheduled Completion Date. The Traffic Aid Post(s) shall be deemed to be part of the Site and shall vest in the Client.

(i) Building for Medical Aid Post

The Contractor shall, at its cost and in accordance with the type designs prescribed for such buildings by the State Medical Department (or a substitute thereof to be designated by the Authority), construct an aid post building and hand it over to the Authority, no later than 30 (thirty) days prior to Scheduled Completion Date. The Medical Aid Post(s) shall be deemed to be part of the Site and shall vest in the Client.

(j) Others to be specified.

i) Highway Lighting:

Highway LED Lighting: LED Lighting shall be provided at the following locations:

- a. LED Lighting shall be provided at approach to bridges, Flyover, built up areas, toll plaza, Bus stops, truck Lay-byes and rest areas as per manual recommended in Schedule D.
- b. Apart from above locations lighting shall be provided at underpasses and ROB/RUB and as per site condition in consultation with Engineer and shall not be treated as change of scope. On all grade separated structures Lightings will be provided on Top & Underside as per clause 3.3.4 & 12.3 of IRC SP 84.
- c. High Mast Lighting with LED light shall be provided at all Major Junctions, Toll plaza locations or any other location as per clause 12.3.3 of IRC SP 84.

- ii) Rainwater Harvesting** – As per Ministry of Environment and Forests Notification, New Delhi dated 14.01.1997 (as amended on 13.01.1998, 05.01.1999 & 6.11.2000), the construction of Rainwater, harvesting structure is mandatory in and around Water Crisis area, notified by the Central Ground Water Board. Minimum 1 number per 5 km has to be provided throughout the project length.

Schedule-D

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



SCHEDULE - D

(See Clause 2.1)

SPECIFICATIONS AND STANDARDS

1 Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project Highway.

2 Design Standards

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

Manual of Specifications and Standards for Four-Laning of Highways (IRC: SP: 84 - 2019), referred to herein as the Manual

Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Annex - I

(Schedule-D)

Specifications and Standards for Construction

1 Specifications and Standards

All Materials, works and construction operations shall conform to the manual of Specifications and Standards for Four-Laning of Highways with Paved Shoulder (Second Revision) (IRC: SP:84-2019), referred to as the manual, and MORTH Specifications for Road and Bridge Works. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

2 Deviations from the Specifications and Standards

- (i) The terms "Contractor", "Independent Engineer" and "Concession Agreement" used in the manual shall be deemed to be substituted by the terms "Contractor", "Authority's Engineer" and "Agreement" respectively.

Schedule-E

Schedule – E

(See Clause 2.1 and 14.2)

MAINTENANCE REQUIREMENTS

1 Maintenance Requirements

- 1.1 The Contractor shall, at all-time maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- 1.2 The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfillment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Termination thereof.
- 1.3 All Materials, works and construction operations shall conform to the “SPECIFICATIONS FOR ROAD AND BRIDGE WORKS (FIFTH REVISION, April 2013)”, including latest corrections slips, issued by the Ministry of Surface Transport & Highways, Government of India and published by the Indian Roads Congress.

Where the specifications for a work are not given, Good Industry Practice shall be adopted to the satisfaction of the Authority’s Engineer.

2 Repair/rectification of Defects and deficiencies

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex-I of this Schedule-E within the time limit set forth therein.

3 Other Defects and deficiencies

In respect of any Defect or deficiency not specified in Annex-I of this Schedule-E, the Authority’s Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority’s Engineer.

4 Extension of time limit

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Such additional time shall be determined by the Authority’s Engineer and conveyed to the Contractor and the Authority with reasons thereof;

5 Emergency repairs/restoration

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage to property, the Contractor shall promptly take all reasonable measures for eliminating or minimizing such danger.

6 Daily inspection by the Contractor

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at any time during office hours.

7 Pre-monsoon inspection / Post-monsoon inspection

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP:35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

8 Repairs on account of natural calamities

All damages occurring to the Project Highway on account of torrential rains, floods, earthquake or other natural disasters shall be undertaken by the Contractor at its own cost and/or out of the proceeds of insurance.

Annex -I
(Schedule-E)

Annex –I Repair/rectification of Defects and deficiencies

The Contractor shall repair and rectify the Defects and deficiencies specified in this Annex-I of Schedule-E within the time limit set forth in the table below.

Table -1: Maintenance Criteria for Pavements:

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/ Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/Repair	Maintenance Specifications
		Desirable	Acceptable					
Flexible Pavement (Pavement of MCW, Service Road, approaches of Grade structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)	Potholes	Nil	< 0.1 % of area and subject to limit of 10 mm in depth	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC 82: 2015 and Distress Identification Manual for Long Term Pavement Performance Program, FHWA 2003 (http://www.tfhrcc.com/pavement/lt/tp/reports/03031/)	24-48 hours	MORT&H Specification 3004.2
	Cracking	Nil	< 5 % subject to limit of 0.5 sqm for any 50 m length	Daily			7-15 days	MORT&H Specification 3004.3
	Rutting	Nil	< 5 mm	Daily	Straight Edge		15 -30 days	MORT&H Specification 3004.2
	Corrugations and Shoving	Nil	< 0.1 % of area	Daily	Length Measurement Unit like Scale, Tape, odometer etc.		2-7 days	IRC:82-2015
	Bleeding	Nil	< 1 % of area	Daily			3-7 days	MORT&H Specification 3004.4
	Ravelling/ Stripping	Nil	< 1 % of area	Daily			7-15 days	IRC:82-2015 read with IRC SP 81
	Edge Deformation/ Breaking	Nil	< 1 m for any 100 m section and width < 0.1 m at any location, restricted to 30 cm from the edge	Daily			7- 15 days	IRC:82-2015
	Roughness BI	2000 mm/km	2400 mm/km	Bi-Annually	Class I Profilometer SCRM (Sideway-force Coefficient Routine Investigation Machine or equivalent)	Class I Profilometer : ASTM E950 (98) :2004 –Standard Test Method for measuring Longitudinal Profile of Travelled Surfaces with Accelerometer Established Inertial Profiling Reference ASTM E1656 -94: 2000- Standard Guide for Classification of Automatic Pavement Condition Survey Equipment	180 days	IRC:82-2015
	Skid Number	60SN	50SN	Bi-Annually			180 days	BS: 7941-1: 2006
	Pavement Condition Index	3	2.1	Bi-Annually			180 days	IRC:82-2015
	Other Pavement Distresses			Bi-Annually			2-7 days	IRC:82-2015

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/ Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/Repair	Maintenance Specifications
		Desirable	Acceptable					
	Deflection/ Remaining Life			Annually	Falling Weight Deflectometer	IRC 115: 2014	180 days	IRC:115-2014
Rigid Pavement (Pavement of MCW, Service Road, Grade structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)	Roughness BI	2200mm/km	2400mm/km	Bi-Annually	Class I Profilometer	ASTM E950 (98) :2004 and ASTM E1656 -94: 2000	180 days	IRC:SP:83-2008
	Skid	Skid Resistance no. at different speed of vehicles		Bi-Annually	SCRIM (Sideway-force Coefficient Routine Investigation Machine or equivalent)	IRC:SP:83-2008	180 days	IRC:SP:83-2008
		Minimum SN	Traffic Speed (Km/h)					
		36	50					
		33	65					
		32	80					
		31	95					
		31	110					
Embankment/ Slope	Edge drop at shoulders	Nil	40mm	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC	7-15 days	MORT&H Specification 408.4
	Slope of camber/cross fall	Nil	<2% variation in prescribed slope of camber /cross fall	Daily			7-15 days	MORT&H Specification 408.4
	Embankment Slopes	Nil	<15 % variation in prescribe side slope	Daily			7-15 days	MORT&H Specification 408.4
	Embankment Protection	Nil	Nil	Daily	NA		7-15 days	MORT&H Specification
	Rain Cuts/ Gullies in slope	Nil	Nil	Daily Specially During Rainy Season	NA		7-15 days	MORT&H Specification

In addition to the above performance criterion, the contractor shall strictly maintain the rigid pavements as per requirements in the following table

Table -2: Maintenance Criteria for Rigid Pavements:

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
CRACKING						

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
1	Single Discrete Cracks Not intersecting with any joint	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	Not applicable
			1	w < 0.2 mm. hair cracks		
			2	w = 0.2 - 0.5 mm, discernible from slow-moving car	Seal without delay	Seal, and stitch if L > 1m. Within 7days
			3	w = 0.5 - 1.5 mm, discernible from fast-moving car		
			4	w = 1.5 - 3.0 mm	Seal, and stitch if L > 1 m. Within 7 days	Staple or Dowel Bar Retrofit, FDR for affected portion. Within 15days
			5	w > 3 mm.		
2	Single Transverse (or Diagonal) Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	
			1	w < 0.2 mm, hair cracks	Route and seal with epoxy. Within 7 days	Staple or Dowel Bar Retrofit. Within 15days
			2	w = 0.2 - 0.5 mm, discernible from slow vehicle		
			3	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route, seal and stitch, if L > 1 m. Within 7 days	
			4	w = 3.0 - 6.0 mm	Dowel Bar Retrofit. Within 15 days	Full Depth Repair Dismantle and reconstruct affected. Portion with norms and specifications - See Para 5.5 & 9.2 Within 15days
			5	w > 6 mm, usually associated with spalling, and/or slab rocking under traffic	Not Applicable, as it may be full depth	
3	Single Longitudinal Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action	
			1	w < 0.5 mm, discernible from slow moving vehicle	Seal with epoxy, if L > 1 m. Within 7 days	Staple or dowel bar retrofit. Within 15days
			2	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route seal and stitch, if L > 1 m. Within 15 days	-
			3	w = 3.0 - 6.0 mm	Staple, if L > 1 m. Within 15 days	Partial Depth Repair with stapling. Within 15 days
			4	w = 6.0 - 12.0 mm, usually associated with spalling	Not Applicable, as it may be full depth	
			5	w > 12 mm, usually associated with spalling, and/or slab rocking under traffic		
4	Multiple Cracks intersecting with one or more joints	w = width of crack	0	Nil, not discernible	No Action	-
			1	w < 0.2 mm, hair cracks	Seal, and stitch if L > 1 m. Within 15 days	
			2	w = 0.2 - 0.5 mm. discernible from slow vehicle		
			3	w = 0.5 - 3.0 mm, discernible from fast vehicle	Full depth repair within 15 days	Dismantle, Reinststate subbase, Reconstruct whole slab as per
			4	w = 3.0 - 6.0 mm panel broken into 2 or 3 pieces		

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
			5	w > 6 mm and/or panel broken into more than 4 pieces		specifications within 30 days
5	Corner Break	w = width of crack L = length of crack	0	Nil, not discernible	No Action	-
			1	w < 0.5 mm; only 1 corner broken	Seal with low viscosity epoxy to secure broken parts Within 7 days	Seal with epoxy seal with epoxy Within 7days
			2	w < 1.5 mm; L < 0.6 m, only one corner broken	Partial Depth (Refer Figure 8.3 of IRC:SP: 83-2008) Within 15 days	Full depth repair
			3	w < 1.5 mm; L < 0.6 m, two corners broken		Reinstate sub-base, and reconstruct the slab as per norms and specifications within 30days
			4	w > 1.5 mm; L > 0.6 m or three corners broken		
			5	three or four corners broken		
6	Punchout (Applicable to Continuous Reinforced Concrete Pavement (CRCP) only)	w = width of crack L = length (m/m ²)	0	Nil, not discernible	Not Applicable, as it may be full depth	No Action
			1	w < 0.5 mm; L < 3 m/m ²		Seal with low viscosity epoxy to secure broken parts. Within 15days
			2	either w > 0.5 mm or L < 3 m/m ²		
			3	w > 1.5 mm and L < 3 m/m ²		Full depth repair - Cut out and replace damaged area taking care not to damage reinforcement. Within 30days
			4	w > 3 mm, L < 3 m/m ² and deformation		
			5	w > 3 mm, L > 3 m/m ² and deformation		
Surface Defects						
7	Ravelling or Honeycomb type surface	r = area damaged surface/total surface of slab (%) h = maximum depth of damage	0	Nil, not discernible	Short Term No action.	Not Applicable
			1	r < 2 %	Local repair of areas damaged and liable to be damaged. Within 15 days	
			2	r = 2 - 10 %		
			3	r = 10-25%	Bonded Inlay, 2 or 3 slabs if affecting. Within 30 days	
			4	r = 25 - 50 %		
			5	r > 50% and h > 25 mm	Reconstruct slabs, 4 or more slabs if affecting. Within 30 days	
8	Scaling	r = damaged surface/total surface of slab (%) h = maximum depth of damage	0	Nil, not discernible	Short Term No action.	Not Applicable
			1	r < 2 %	Local repair of areas damaged and liable to be damaged. Within 7days	
			2	r = 2 - 10 %		
			3	r = 10 - 20%	Bonded Inlay within 15 days	

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
			4	$r = 20 - 30 \%$		
			5	$r > 30 \%$ and $h > 25 \text{ mm}$	Reconstruct slab within 30 days	
9	Polished Surface/Glazing	t = texture depth, sand patch test	0		No action.	Not Applicable
			1	$t > 1 \text{ mm}$		
			2 '	$t = 1 - 0.6 \text{ mm}$		
			3	$t = 0.6 - 0.3 \text{ mm}$	Monitor rate of deterioration	
			4	$t = 0.3 - 0.1 \text{ mm}$		
			5	$t < 0.1 \text{ mm}$	Diamond Grinding if affecting 50% or more slabs in a continuous stretch of minimum 5 km. Within 30 days	
10	Popout (Small Hole), Pothole Refer Para 8.4	n = number/ m^2 d = diameter h = maximum depth	0	$d < 50 \text{ mm}$; $h < 25 \text{ mm}$; $n < 1$ per 5 m^2	No action.	Not Applicable
			1	$d = 50 - 100 \text{ mm}$; $h < 50 \text{ mm}$; $n < 1$ per 5 m^2	Partial depth repair 65 mm deep. Within 15 days	
			2	$d = 50 - 100 \text{ mm}$; $h > 50 \text{ mm}$; $n < 1$ per 5 m^2		
			3	$d = 100 - 300 \text{ mm}$; $h < 100 \text{ mm}$ $n < 1$ per 5 m^2	Partial depth repair 110mm i.e.10 mm more than the depth of the hole. Within 30 days	
			4	$d = 100 - 300 \text{ mm}$; $h > 100 \text{ mm}$; $n < 1$ per 5 m^2		
			5	$d > 300 \text{ mm}$; $h > 100 \text{ mm}$: $n > 1$ per 5 m^2	Full depth repair. Within 30 days	
Joint Defects						
11	Joint Seal Defects	loss or damage L = Length as % total joint length	0	Difficult to discern.	Short Term No action.	Not Applicable
			1	Discernible, $L < 25\%$ but of little immediate consequence with regard to ingress of water or trapping incompressible material.	Clean joint, inspect later.	
			3	Notable. $L > 25\%$ insufficient protection against ingress of water and trapping incompressible material.	Clean and reapply sealant in selected locations. Within 7 days	
			5	Severe; $w > 3 \text{ mm}$ negligible protection against ingress of water and trapping incompressible material.	Clean, widen and reseal the joint. Within 7 days	
12	Spalling of Joints	w = width on either side of the joint L = length of spalled portion (as %	0	Nil, not discernible	No action.	Not Applicable
			1	$w < 10 \text{ mm}$	Apply low viscosity epoxy resin/	
			2	$w = 10 - 20 \text{ mm}$, $L < 25\%$	mortar in cracked portion.	

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
		joint length)			Within 7 days	
			3	$w = 20 - 40 \text{ mm}$, $L > 25\%$	Partial Depth Repair. Within 15 days	
			4	$w = 40 - 80 \text{ mm}$, $L > 25\%$	30 - 50 mm deep, $h = w + 20\%$ of w , within 30 days	
			5	$w > 80 \text{ mm}$, and $L > 25\%$	50 - 100 mm deep repair. $H = w + 20\%$ of w . Within 30 days	
13	Faulting (or Stepping) in Cracks or Joints	f = difference of level	0	not discernible, $< 1 \text{ mm}$	No action.	No action.
			1	$f < 3 \text{ mm}$		
			2	$f = 3 - 6 \text{ mm}$	Determine cause and observe, take action for diamond grinding	Replace the slab as appropriate. Within 30days
			3	$f = 6 - 12 \text{ mm}$	Diamond Grinding	
			4	$f = 12 - 18 \text{ mm}$	Raise sunken slab.	Replace the slab as appropriate. Within 30days
			5	$f > 18 \text{ mm}$	Strengthen subgrade and sub-base by grouting and raising sunken slab	
14	Blowup or Buckling	h = vertical displacement from normal profile	0	Nil, not discernible	Short Term	Long Term
			1	$h < 6 \text{ mm}$	No Action	
			2	$h = 6 - 12 \text{ mm}$	Install Signs to Warn Traffic within 7 days	
			3	$h = 12 - 25 \text{ mm}$		
			4	$h > 25 \text{ mm}$	Full Depth Repair. Within 30 days	
			5	shattered slabs, ie 4 or more pieces	Replace broken slabs. Within 30 days	
15	Depression	h = negative vertical displacement from normal profile L =length	0	Not discernible, $h < 5 \text{ mm}$	No action.	Not Applicable
			1	$h = 5 - 15 \text{ mm}$		
			2	$h = 15\text{-}30 \text{ mm}$, Nos $< 20\%$ joints	Install Signs to Warn Traffic within 7 days	
			3	$h = 30 - 50 \text{ mm}$		
			4	$h > 50 \text{ mm}$ or $> 20\%$ joints	Strengthen sub-grade. Reinststate pavement at normal level if $L < 20 \text{ m}$. Within 30 days	
			5	$h > 100 \text{ mm}$		

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
16	Heave	h = positive vertical displacement from normal profile. L = length	0	Not discernible. $h < 5$ mm	Short Term No action.	Long Term scrabble
			1	$h = 5 - 15$ mm	Follow up.	
			2	$h = 15 - 30$ mm, Nos $< 20\%$ joints	Install Signs to Warn Traffic within 7 days	
			3	$h = 30 - 50$ mm		
			4	$h > 50$ mm or $> 20\%$ joints	Stabilise subgrade. Reinstate pavement at normal level if length < 20 m. Within 30 days	
			5	$h > 100$ mm		
17	Bump	h = vertical displacement from normal profile	0	$h < 4$ mm	No action	
			1	$h = 4 - 7$ mm	Grind, in case of new construction within 7 days	Construction Limit for New Construction.
			3	$h = 7 - 15$ mm	Grind, in case of ongoing Maintenance within 15 days	Replace in case of new construction. Within 30days
			5	$h > 15$ mm	Full Depth Repair. Within 30 days	Full Depth Repair. Within 30days
18	Lane to Shoulder Dropoff	f = difference of level	0	Nil, not discernible < 3 mm	Short Term No action.	Long Term
			1	$f = 3 - 10$ mm	Spot repair of shoulder within 7 days	
			2	$f = 10 - 25$ mm		
			3	$f = 25 - 50$ mm	Fill up shoulder within 7 days	
			4	$f = 50 - 75$ mm		
			5	$f > 75$ mm		For any 100 m stretch Reconstruct shoulder, if affecting 25% or more of stretch. Within 30days
Drainage						
19	Pumping	quantity of fines and water expelled through open joints and cracks Nos	0	not discernible	No Action	
			1 to 2	slight/ occasional Nos $< 10\%$	Repair cracks and joints Without delay.	Inspect and repair sub-drainage at distressed sections and upstream.
			3 to 4	appreciable/ Frequent 10 - 25%	Lift or jack slab within 30 days.	
		Nos/100 m stretch	5	abundant, crack development $> 25\%$	Repair distressed pavement sections. Strengthen subgrade and subbase. Replace slab.	

Sr. No.	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$	For the case $d > D/2$
					Within 30 days	
20	Ponding	Ponding on slabs due to blockage of drains	0-2	No discernible problem	No action.	
			3 to 4	Blockages observed in drains, but water flowing	Clean drains etc within 7 days, Follow up	Action required to stop water damaging foundation within 30 days.
			5	Ponding, accumulation of water observed	-do-	

Table -3: Maintenance Criteria for Safety Related Items and Other Furniture Items:

Asset Type	Performance Parameter	Level of Service (LOS)			Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Highway	Availability of Safe Sight Distance	As per IRC SP: 84-2014, a minimum of safe stopping sight distance shall be available throughout.			Monthly	Manual Measurements with Odometer along with video/ image backup	Removal of obstruction within 24 hours, in case of sight line affected by temporary objects such as trees, temporary encroachments. In case of permanent structure or design deficiency: Removal of obstruction/improvement of deficiency at the earliest Speed Restriction boards and suitable traffic calming measures such as transverse bar marking, blinkers, etc. shall be applied during the period of rectification.		IRC:SP 84-2014
		Design Speed, kmph	Desirable Minimum Sight Distance (m)	Safe Stopping Sight Distance (m)					
		100	360	180					
		80	260	130					
Pavement Marking	Wear	<70% of marking remaining			Bi-Annually	Visual Assessment as per Annexure-F of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect - within 2 months	IRC:35-2015
	Day time Visibility	During expected life Service Time Cement Road - 130mcd/m ² /lux Bituminous Road - 100mcd/m ² /lux			Monthly	As per Annexure-D of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015
	Night Time Visibility	<u>Initial and Minimum Performance for Dry Retro reflectivity during night time:</u>			Bi-Annually	As per Annexure-E of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015
		Design Speed	(RL) Retro Reflectivity (mcd/m ² /lux)						
			Initial (7 days)	Minimum Threshold level (TL) & warranty period required up to 2 years					
		Up to 65	200	80					
		65 - 100	250	120					
		Above 100	350	150					
		<u>Initial and Minimum Performance for Night Visibility under wet condition (Retro reflectivity):</u> Initial 7 days Retro reflectivity: 100							

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
		mcd/m ² /lux Minimum Threshold Level: 50 mcd/m ² /lux					
	Skid Resistance	Initial and Minimum performance for Skid Resistance: Initial (7days): 55BPN Min. Threshold: 44BPN *Note: shall be considered under urban/city traffic condition encompassing the locations like pedestrian crossings, bus bay, bus stop, cycle track intersection delineation, transverse bar markings etc	Bi-Annually	As per Annexure-G of IRC:35-2015		Within 24 hours	IRC:35-2015
Road Signs	Shape and Position	Shape and Position as per IRC:67-2012. Signboard should be clearly visible for the design speed of the section.	Daily	Visual with video/image backup	Improvement of shape, in case if shape is damaged. Relocation as per requirement	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 15 Days in case of Gantry/Cantilever Sign boards	IRC:67-2012
	Retro reflectivity	As per specifications in IRC:67-2012	Bi-Annually	Testing of each signboard using Retro Reflectivity Measuring Device. In accordance with ASTM D 4956-09.	Change of signboard	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 1 Month in case of Gantry/Cantilever Sign boards	IRC:67-2012
Kerb	Kerb Height	As per IRC 86:1983 depending upon type of Kerb	Bi-Annually	Use of distance measuring tape	Raising Kerb Height	Within 1 Month	IRC 86:1983
	Kerb Painting	<u>Functionality</u> : Functioning of Kerb painting as intended	Daily	Visual with video/image backup	Kerb Repainting	Within 7-days	IRC 35:2015
Other Road Furniture	Reflective Pavement Markers (Road Studs)	Numbers and Functionality as per specifications in IRC:SP:84-2014 and IRC:35-2015, unless specified in Schedule-B.	Daily	Counting	New Installation	Within 2 months	IRC:SP:84-2014, IRC:35-2015

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
	Pedestrian Guardrail	<u>Functionality:</u> Functioning of guardrail as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:SP:84-2014
	Traffic Safety Barriers	<u>Functionality:</u> Functioning of Safety Barriers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014, IRC:119-2015
	End Treatment of Traffic Safety Barriers	<u>Functionality:</u> Functioning of End Treatment as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014, IRC:119-2015
	Attenuators	<u>Functionality:</u> Functioning of Attenuators as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:2014, IRC:119-2015
	Guard Posts and Delineators	<u>Functionality:</u> Functioning of Guard Posts and Delineators as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC: 79 - 1981
	Overhead Sign Structure	Overhead sign structure shall be structurally adequate	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:67-2012
	Traffic Blinkers	<u>Functionality:</u> Functioning of Traffic Blinkers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014
Highway Lighting System	Highway Lights	Illumination: Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014
		No major failure in the lighting system	Daily	-	Rectification of failure	24 hours	IRC:SP:84-2014
		No minor failure in the lighting system	Monthly	-	Rectification of failure	8 hours	IRC:SP:84-2014
	Toll Plaza Canopy Lights	Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014
		No major/minor failure in the lighting system	Daily	-	Rectification of failure	8 hours	IRC:SP:84-2014

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Trees and Plantation including median plantation	Obstruction in a minimum head-room of 5.5 m above carriageway or obstruction in visibility of road signs	No obstruction due to trees	Monthly	Visual with video/image backup	Removal of trees	Immediate	IRC:SP:84-2014
	Deterioration in health of trees and bushes	Health of plantation shall be as per requirement of specifications & instructions issued by Authority from time to time	Daily	Visual with video/image backup	Timely watering and treatment. Or Replacement of Trees and Bushes.	Within 90 days	IRC:SP:84-2014
	Vegetation affecting sight line and road structures	Sight line shall be free from obstruction by vegetation	Daily	Visual with video/image backup	Removal of Trees	Immediate	IRC:SP 84-2014
Rest Areas	Cleaning of toilets	-	Daily	-	-	Every 4 hours	
	Defects in electrical, water and sanitary installations	-	Daily	-	Rectification	24 hours	
Other Project Facilities and Approach roads	Damage or deterioration in Approach Roads, pedestrian facilities, truck lay-bys, bus-bays, bus- shelters, cattle crossings, Traffic Aid Posts, Medical Aid Posts and other works		Daily	-	Rectification	15 days	IRC:SP 84-2014

Table 4: Maintenance Criteria for Structures and Culverts:

Pipe/box/slab culverts	Free waterway/unobstructed flow	85% of culvert normal flow area to available.	2 times in a year (before	Inspection by Bridge Engineer as per IRC	Cleaning silt up soils and debris in culvert	15 days before onset of monsoon and within 30	IRC 5-2015, IRC SP:40-1993 and IRC
-------------------------------	---------------------------------	---	---------------------------	--	--	---	------------------------------------

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
	section		and after rainy season)	SP: 35-1990 and recording of depth of silting and area of vegetation.	barrel after rainy season, removal of bushes and vegetation, U/s of barrel, under barrel and D/s of barrel before rainy season.	days after end of rainy season.	SP:13-2004
	Leak-proof expansion joints if any	No leakage through expansion joints	Bi-Annually	Physical inspection of expansion joints as per IRC SP: 35-1990 if any, for leakage strains on walls at joints.	Fixing with sealant suitably	30 days or before onset of rains whichever comes earlier	IRC SP:40-1993 and IRC SP:69-2011
	Structurally sound	Spalling of concrete not more than 0.25 sqm	Bi-Annually	Detailed inspection of all components of culvert as per IRC SP:35-1990 and recording the defects	Repairs to spalling, cracking, delamination, rusting shall be followed as per IRC: SP: 40-1993.	15 days	IRC SP 40-1993 and MORTH Specifications clause 2800
		Delamination of concrete not more than 0.25 sq.m.					
		Cracks wider than 0.3 mm not more than 1m aggregate length					
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sqm, damage to solid apron (concrete apron) not more than 1 sqm	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40-1993 and IRC:SP:13-2004.
Bridges including ROBs Flyover etc. as applicable	Riding quality or user comfort	No pothole in wearing coat on bridge deck	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC or wearing coat	15 days	MORT&H Specification 2811
Bridge - Super Structure	Bumps	No bump at expansion joint	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC on either side of expansion joints, profile correction course on approach slab in case of settlement to approach	15 days	MORT&H Specification 3004.2 & 2811.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
					embankment		
	User safety (condition of crash barrier and guard rail)	No damaged or missing stretch of crash barrier or pedestrian hand railing	Daily	Visual inspection and detailed condition survey as per IRC SP: 35-1990.	Repairs and replacement of safety barriers as the case may be	3days	IRC: 5-1998, IRC SP: 84-2014 and IRC SP: 40-1993.
	Rusted reinforcement	Not more than 0.25 sqm	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out the repairs to affected concrete portion with epoxy mortar / concrete.	15 days	IRC SP: 40-1993 and MORTH Specification 1600.
	Spalling of concrete	Not more than 0.50 sqm					
	Delamination	Not more than 0.50 sq.m					
	Cracks wider than 0.30 mm	Not more than 1m total length	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting with epoxy mortar, investigating causes for cracks development and carry out necessary rehabilitation.	48 Hours	IRC SP: 40-1993 and MORTH Specification 2800.
	Rainwater seepage through deck slab	Leakage - nil	Quarterly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting of deck slab at leakage areas, waterproofing, repairs to drainage spouts	1 months	MORTH specifications 2600 & 2700.
	Deflection due to permanent loads and live loads	Within design limits.	Once in every 10 years for spans more than 40 m	Load test method	Carry out major rehabilitation works on bridge to retain original design loads capacity	6 months	IRC SP: 51-1999.
	Vibrations in bridge deck due to moving trucks	Frequency of vibrations shall not be more than 5 Hz	Once in every 5 years for spans more than 30m and every 10 years for spans between 15 to	Laser displacement sensors or laser vibro-meters	Strengthening of super structure	4 months	AASHTO LRFD specifications

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
			30 m				
	Leakage in Expansion joints	No damage to elastomeric sealant compound in strip seal expansion joint, no leakage of rain water through expansion joint in case of buried and asphalt plug and copper strip joint.	Bi-Annually	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Replace of seal in expansion joint	15 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Debris and dust in strip seal expansion joint	No dust or debris in expansion joint gap.	Monthly	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Cleaning of expansion joint gaps thoroughly	3 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Drainage spouts	No down take pipe missing/broken below soffit of the deck slab. No silt, debris, clogging of drainage spout collection chamber.	Monthly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Cleaning of drainage spouts thoroughly. Replacement of missing/broken down take pipes with a minimum pipe extension of 500mm below soffit of slab. Providing sealant around the drainage spout if any leakages observed.	3 days	MORTH specification 2700.
Bridge-substructure	Cracks/spalling of concrete/rusted steel	No cracks, spalling of concrete and rusted steel	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out repairs to substructure by grouting/guniting and micro concreting depending on type	30 days	IRC SP: 40-1993 and MORTH specification 2800.

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
					of defect noticed		
	Bearings	Delamination of bearing reinforcement not more than 5%, cracking or tearing of rubber not more than 2 locations per side, no rupture of reinforcement or rubber	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	In case of failure of even one bearing on any pier/abutment, all the bearings on that pier/abutment shall be replaced, in order to get uniform load transfer on to bearings.	3 months	MORTH specification 2810 and IRC SP: 40-199.
Bridge Foundations	Scouring around foundations	Scouring shall not be lower than maximum scour level for the bridge	Bi-Annually	Condition survey and visual inspection as per IRC SP:35-1990 using Mobile Bridge Inspection Unit. In case of doubt, use Underwater camera for inspection of deep wells in major Rivers.	Suitable protection works around pier/abutment	1 month	IRC SP: 40-1993, IRC 83-2014, MORTH specification 2500
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sq.m, damage to solid apron (concrete apron) not more than 1 sq.m	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching.	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40-1993 and IRC:SP:13-2004.
Note: Any Structure during the entire contract period which is found that does not complies with all requirements of this Table will be prepared, rehabilitated or even reconstructed under the scope of the contractor.							



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Table 5: Maintenance Criteria for Hill Roads

In addition to above, for hill roads the following provisions for maintenance is also to done.

Hill Roads		
(i)	Damage to Retaining wall/ Breast wall	7 (Seven) days
(ii)	Landslides requiring clearance	12 (Twelve) hours
(iii)	Snow requiring clearance	24 (Twenty Four) hours

Note: For all tables 1 to 5 above, latest BIS & IRC standards (even those not indicated herewith) along with MoRTH specifications shall be binding for all maintenance activities.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

A. Flexible Pavement

Nature of Defect or deficiency		Time limit for repair/ rectification
(b) Granular earth shoulders, side slopes, drains and culverts		
(i)	Variation by more than 1 % in the prescribed slope of camber/cross fall (shall not be less than the camber on the main carriageway)	7 (seven) days
(ii)	Edge drop at shoulders exceeding 40 mm	7 (seven) days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 (thirty) days
(iv)	Rain cuts/gullies in slope	7 (seven) days
(v)	Damage to or silting of culverts and side drains	7 (seven) days
(vi)	Desilting of drains in urban/semi- urban areas	24 (twenty four) hours
(vii)	Railing, parapets, crash barriers	7 (seven) days (Restore immediately if causing safety hazard)
(c) Road side furniture including road sign and pavement marking		
(i)	Damage to shape or position, poor visibility or loss of retro- reflectivity	48 (forty eight) hours
(ii)	Painting of km stone, railing, parapets, crash barriers	As and when required/ Once every year
(iii)	Damaged/missing signs road requiring replacement	7 (seven) days
(iv)	Damage to road mark ups	7 (seven) days
(d) Road lighting		
(i)	Any major failure of the system	24 (twenty four) hours
(ii)	Faults and minor failures	8 (eight) hours
(e) Trees and plantation		
(i)	Obstruction in a minimum head- room of 5 m above carriageway or obstruction in visibility of road signs	24 (twenty four) hours
(ii)	Removal of fallen trees from carriageway	4 (four) hours
(iii)	Deterioration in health of trees and bushes	Timely watering and treatment
(iv)	Trees and bushes requiring replacement	30 (thirty) days
(v)	Removal of vegetation affecting sight line and road structures	15 (fifteen) days
(f) Rest area		
(i)	Cleaning of toilets	Every 4 (four) hours



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Nature of Defect or deficiency		Time limit for repair/ rectification
(ii)	Defects in electrical, water and sanitary installations	24 (twenty four) hours
(g)	[Toll Plaza]	
(h)	Other Project Facilities and Approach roads	
(i)	Damage in approach roads, pedestrian facilities, truck lay-byes, bus-bays, bus-shelters, cattle crossings, [Traffic Aid Posts, Medical Aid Posts] and service roads	15 (fifteen) days
(ii)	Damaged vehicles or debris on the road	4 (four) hours
(iii)	Malfunctioning of the mobile crane	4 (four) hours
Bridges		
(a)	Superstructure	
(i)	Any damage, cracks, spalling/ scaling Temporary measures	within 48 (forty eight) hours
	Permanent measures	within 15 (fifteen) days or as specified by the Authority's Engineer
(b)	Foundations	
(i)	Scouring and/or cavitation	15 (fifteen) days
(c)	Piers, abutments, return walls and wing walls	
(i)	Cracks and damages including settlement and tilting, spalling, scaling	30 (thirty) days
(d)	Bearings (metallic) of bridges	
(i)	Deformation, damages, tilting or shifting of bearings	15 (fifteen) days Greasing of metallic bearings once in a year
(e)	Joints	
(i)	Malfunctioning of joints	15 (fifteen) days
(f)	Other items	
(i)	Deforming of pads in elastomeric bearings	7 (seven) days
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	3 (three) days
(iii)	Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days (immediately within 24 hours if posing danger to safety)
(iv)	Rain-cuts or erosion of banks of the side slopes of approaches	7 (seven) days
(v)	Damage to wearing coat	15 (fifteen) days
(vi)	Damage or deterioration in approach slabs, pitching, apron, toes, floor or guide bunds	30 (thirty) days



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Nature of Defect or deficiency		Time limit for repair/ rectification
(vii)	Growth of vegetation affecting the structure or obstructing the waterway	15 (fifteen) days
(g)	Hill Roads	
(i)	Damage to retaining wall/breast wall	7 (seven) days
(ii)	Landslides requiring clearance	12 (twelve) hours
(iii)	Snow requiring clearance	24 (twenty four) hours

[Note: Where necessary, the Authority may modify the time limit for repair/rectification, or add to the nature of Defect or deficiency before issuing the bidding document, with the approval of the competent authority.]

Schedule-F



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-F

(See Clause 4.1 (vii)(a))

APPLICABLE PERMITS

1 Applicable Permits

The Contractor shall obtain, as required under the Applicable Laws, the following Applicable Permits:

- (a) Permission of the State Government for extraction of boulders from quarry;
- (b) Permission of Village Panchayat and Pollution Control Board for installation of crushers;
- (c) License for use of explosives;
- (d) Permission of the State Government for drawing water from river/reservoir;
- (e) License from inspector of factories or other competent Authority for setting up batching plant;
- (f) Clearance of Pollution Control Board for setting up batching plant;
- (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphalt plant;
- (h) Permission of Village Panchayats and State Government for borrow earth; and
- (i) Any other permits, clearances or approvals required under Applicable Laws.

- 1.1 Applicable permits, as required, relating to environmental protection and conservation shall have been produced by the Authority in accordance with the provisions of this Agreement

Schedule-G

Schedule-G

(See Clauses 7.1 and 19.2)

Annex-I : Form of Bank Guarantee

(See Clause 7.1)

[Performance Security /Additional Performance Security]

To

_____ [name of Authority]
_____ [address of Authority]

WHEREAS _____ [name and address of Contractor] (hereafter called the "Contractor") has undertaken, in pursuance of Letter of Acceptance (LOA) No. __Dated__ for construction of [name of the Project] (hereinafter called the "Contract")

AND WHEREAS the Contract requires the Contractor to furnish an {Performance Security/ Additional Performance Security} for due and faithful performance of its obligations, under and in accordance with the Contract, during the {Construction Period/ Defects Liability Period and Maintenance Period} in a sum of Rs..... cr. (Rupees crore) (the "**Guarantee Amount**"¹).

AND WHEREAS we, _____ through our branch at _____ (the "**Bank**") have agreed to furnish this Bank Guarantee (hereinafter called the "**Guarantee**") by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor's obligations during the {Construction Period/ Defects Liability Period and Maintenance Period} under and in accordance with the Contract, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager of National Highways & Infrastructure Development Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Contract shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Contract and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court,

¹ Guarantee Amount for Performance Security and Additional Performance Security shall be calculated as per Contract.

tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.

5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Contract or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Contractor contained in the Contract or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Contract and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.

6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Contract or for the fulfillment, compliance and/or performance of all or any of the obligations of the Contractor under the Contract.

7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.

8. The Guarantee shall cease to be in force and effect on ****[§]. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.

9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.

10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorized to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Contract.
12. This Guarantee is subject to the Uniform Rules for Demand Guarantees (URDG) 2010 Revision, ICC Publication No. 758, except that the supporting statement under Article 15(a) is hereby excluded.
13. This guarantee shall also be operatable at our.....Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.
14. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHIDCL, details of which is as under:

⁵Insert date atleast 2 (two) years from the date of issuance of this Guarantee (in accordance with Clause 2.21 of the RFP). The Contractors can submit the BG for periods of two years at one time and keep on renewing the same till the DLP is over if they have problems in getting the BG in one go for the entire DLP.

S.No.	Particulars	Details
1	Name of Beneficiary	National Highways & Infrastructure Development Corporation Limited
2	Beneficiary Bank Account No.	90621010002659
3	Beneficiary Bank Branch IFSC	CNRB0019062
4	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank) transport Bhawan, 1st Parliament Street, New Delhi-110001

Signed and sealed this day of, 20..... at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex - II
(Schedule - G)
(See Clause 19.2)

Annex – II: Form for Guarantee for Advance Payment

To

_____ [name of Authority]
_____ [address of Authority]

WHEREAS:

- (A) [name and address of contractor] (hereinafter called the "**Contractor**") has executed an agreement (hereinafter called the "**Agreement**") with the [name and address of the authority], (hereinafter called the "**Authority**") for the construction of the ***** section of [National Highway No. **] on Engineering, Procurement and Construction (the "**EPC**") basis, subject to and in accordance with the provisions of the Agreement
- (B) In accordance with Clause 19.2 of the Agreement, the Authority shall make to the Contractor an interest bearing @Bank Rate + 3% advance payment (herein after called "**Advance Payment**") equal to 10% (ten per cent) of the Contract Price; and that the Advance Payment shall be made in two installments subject to the Contractor furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of such installment to remain effective till the complete and full repayment of the installment of the Advance Payment as security for compliance with its obligations in accordance with the Agreement. The amount of {first/second} installment of the Advance Payment is Rs. _____ cr. (Rupees _____ crore) and the amount of this Guarantee is Rs. _____ cr. (Rupees _____ crore) (the "**Guarantee Amount**")².
- (C) We, through our branch at (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways Authority of India], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for the repayment of the instalment of the Advance Payment under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever

2. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the

² The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment

principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

3. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
4. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
5. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Advance Payment.
6. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
7. The Guarantee shall cease to be in force and effect on ****³ Unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.
8. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
9. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
10. This Guarantee shall come into force with immediate effect and shall remain in

³ Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).

force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

11. This Guarantee is subject to the Uniform Rules for Demand Guarantees (URDG) 2010 Revision, ICC Publication No. 758, except that the supporting statement under Article 15(a) is hereby excluded.
12. This guarantee shall also be operatable at our.....Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.
13. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHIDCL, details of which is as under:

S.No.	Particulars	Details
1	Name of Beneficiary	National Highways & Infrastructure Development Corporation Limited
2	Beneficiary Bank Account No.	90621010002659
3	Beneficiary Bank Branch IFSC	CNRB0019062
4	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank) transport Bhawan, 1st Parliament Street, New Delhi-110001

Signed and sealed this day of, 20at

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:
(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.

The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Schedule-H



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-H

(See Clauses 10.1 (iv) and 19.3)

1 Contract Price Weightages

1.1 The Contract Price for this Agreement is Rs. Cr.

1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

S. no.	Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
	1	2	3	4
1	Road works including culverts, widening and repair of culverts.	60.68%	A - Widening and strengthening of existing road	
			B.1 - Reconstruction/ New 2/4-lane realignment/bypass (Flexible pavement)	
			(1) Earthwork upto Subgrade top	40.00%
			(2) Subbase course	11.00%
			(3) Non bituminous base course	10.00%
			(4) Bituminous base	10.00%
			(5) Wearing coat	9.00%
			B.2 - Reconstruction/ New 2/4-lane realignment/bypass (Rigid Pavement)	
			C.1 - Reconstruction/ New Service road (flexible Pavement)	
			(1) Earthwork upto Subgrade top	0.50%
			(2) Subbase course	1.00%
			(3) Non bituminous base course	1.00%
			(4) Bituminous base	1.00%
			(5) wearing coat	1.00%
			C.2 - Reconstruction/ New Service road (Rigid Pavement)	
			D. - Reconstruction/ New culverts on existing road and realignments, bypasses	15.50%
2	Minor Bridges/ Underpasses/ Overpasses	1.25%	A.1 - Widening and repairs of Minor Bridges	
			A.2 - New of Minor Bridges	
			B.1 - Widening and repairs of Underpasses/Overpasses	
			B.2 - New Underpasses/Overpasses	



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

S. no.	Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
	1	2	3	4
			(1) Foundation	9.00%
			(2) Sub-structure	8.00%
			(3) Super-structure	67.00%
			(4) Approaches	16.00%
3	Other works	37.06%	(i) Toll plaza	10.00%
			(ii) Road side drains	10.00%
			(iii) Road signs, markings, km stones, safety devices etc.	15.00%
			(iv) Project facilities	
			(a) Bus Bay with Bus Shelter	0.75%
			(b) Truck lay byes	0.85%
			(c) Foot Over Bridges	1.00%
			(d) others to specified	
			(i) Street light	0.35%
			(ii) Rainwater harvesting	0.50%
			(iii) Junction improvement	1.00%
			(v) Protection works - - retaining wall / toe wall, breast wall etc.	
			a) Breast wall	
			PCC BW – 4.0m Ht.	23.80%
			RCC/ Gabion BW - 6m Ht.	8.20%
			RCC/ Gabion BW - 8m Ht.	6.00%
			b) Retaining /Toe wall	
			PCC RW - 3m Ht.	0.90%
			PCC RW - 4m Ht.	0.55%
			PCC RW - 5m Ht.	0.70%
			RCC RW - 6m Ht.	1.00%
			RCC RW - 7m Ht.	0.65%
			RCC RW - 8m Ht.	1.25%
			(vi) Side Slope Protection works Turfing and stone pitching	
			a) Cut slope protection soil nailing etc.	7.50%
			b) Fill Slope - Reinforced soil slope	5.00%
			c) Reinforced Soil wall	5.00%



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

S. no.	Item	Weightage in percentage to the Contract Price	Stage for Payment	Percentage weightage
	1	2	3	4
4	Electrical utilities and public Health Utilities (Water pipe lines and sewage lines)	1.01%	(i) EHT line / (ii) EHT crossings	41.72%
			(iii) HT/ LT line / (iv) HT/ LT crossings	15.14%
			(v) Water pipeline / (vi) Water pipeline crossings	43.14%
			(vii) Sewage lines / (viii) Sewage line crossings	0.00%

1.3 Procedure of estimating the value of work done.

1.3.1 Road works

Procedure for estimating the value of road work done shall be as follows:

Table 1.3.1

Stage of Payment	Percentage -weightage	Payment Procedure
A - Widening and strengthening of existing road		
B.1 - Reconstruction/ New 2/4-lane realignment/bypass (Flexible pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro-rata basis on completion of a stage in a length not less than 5% (five percent) of the total length.
(1) Earthwork upto Subgrade top	40.00%	
(2) Subbase course	11.00%	
(3) Non bituminous base course	10.00%	
(4) Bituminous base	10.00%	
(5) wearing coat	9.00%	
B.2 - Reconstruction/ New 2/4-lane realignment/bypass (Rigid Pavement)		
C.1 - Reconstruction/ New Service road (flexible Pavement)		Unit of measurement is linear length. Payment of each stage shall be made on pro-rata basis on completion of a stage in a length not less than 5% (five percent) of the total length.
(1) Earthwork upto Subgrade top	0.50%	
(2) Subbase course	1.00%	
(3) Non bituminous base course	1.00%	
(4) Bituminous base	1.00%	
(5) wearing coat	1.00%	
C.2 - Reconstruction/ New Service road (Rigid Pavement)		
D. - Reconstruction/ New culverts	15.50%	Cost of each culvert shall be determined on pro rata basis with respect to the total number of



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Stage of Payment	Percentage -weightage	Payment Procedure
		culverts. Payment shall be made on the completion of at least three culverts.

@. For example, if the total length of bituminous work to be done is 100 km, the cost per km of bituminous work shall be determined as follows:

Cost per km = P x weightage for road work x weightage for bituminous work x (1/L)

Where P= Contract Price. And L = Total length in km.

Similarly, the rates per km for other stages shall be worked out accordingly.

Note: The length affected due to law-and-order problems or litigation during execution due to which the Contractor is unable to execute the work, may be deducted from the total project length for payment purposes. The total length calculated here is only for payment purposes and will not affect and referred in other clauses of the Contract Agreement.

1.3.2 Minor Bridges and Underpasses/Overpasses.

Procedure for estimating the value of Minor Bridge and underpasses/Overpasses shall be as stated in table 1.3.2:

Table 1.3.2

Stage of Payment	Weightage	Payment Procedure
A.1 - Widening and repairs of Minor Bridges		
A.2 - New of Minor Bridges		
B.1 - Widening and repairs of Underpasses/Overpasses		
B.2 - New Underpasses/Overpasses		
(1) Foundation (on completion of the foundation work including foundation for wing wall, return wall, abutments, piers	9.00%	Cost of each minor bridge shall be determined on pro-rata basis with respect to the total linear length (m) of the minor bridges. Payment against foundation shall be made on pro-rata basis on completion of each foundation of the bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Stage of Payment	Weightage	Payment Procedure
(2) Sub-structure (on completion of the sub-structure work for wing wall, return wall, abutments, piers upto the abutment/pier cap	8.00%	Cost of each minor bridge shall be determined on pro-rata basis with respect to the total linear length (m) of the minor bridges. Payment against Sub-Structure shall be made on pro-rata basis on completion of each Sub-Structure upto abutment/pier cap level of each bridge.
(3) Super-structure (on completion of the super structure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barrier road sign, & marking, tests on completion etc. completion in all respect) Wearing coat (a) in case of overpass - wearing coat including expansion joints complete in all respects as specified and (b) in case of Underpass - rigid pavement including drainage facility complete in all respects as specified.	67.00%	Payment shall be made on prorata basis on completion of a stage i.e. completion of super structure of at least one span in all respects as specified in the column of Stage payment in this sub clause.
(4) Approaches (on completion of approaches including retaining walls/ Reinforced earth wall, stone pitching, protection works complete in all respect and fit for use.	16.00%	Payment shall be made on prorata basis on completion of a stage i.e. completion of approaches in all respect as specified.

1.3.3 Major Bridge works, ROB/RUB and Structures

Deleted

1.3.4 Other works.

Procedure for estimating the value of other works done shall be as stated in table

1.3.4:

Table 1.3.4

Stage of Payment	Weightage	Payment Procedure
(i) Toll plaza	10.00%	Unit of measurement is each completed toll plaza. Payment of each toll plaza shall be made on pro rata basis with respect to the total of all toll plazas.
(ii) Road side drains	10.00%	Unit of measurement is linear length in km.
(iii) Road signs, markings, km stones, safety devices	15.00%	Payment shall be made on pro rata basis on completion of a stage in a length of not less than 5 % (five per cent) of the total length.
(iv) Project Facilities		Payment shall be made on pro rata basis for completed facilities.
a) Bus bays with bus shelter	0.75%	



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Stage of Payment	Weightage	Payment Procedure
b) Truck lay-byes	0.85%	
c) Foot Over Bridges	1.00%	
d) Others to be specified		
(i) Street light	0.35%	
(ii) Rainwater harvesting	0.50%	
(iii) Junctions improvement	1.00%	Unit of measurement is number; payment shall be made on pro rata basis on completion of stage in a number of not less than 10% (ten percent) of the total number.
(v) Protection works - - retaining wall / toe wall, breast wall etc.		Unit of measurement is linear length. Payment shall be made on pro-rata basis on completion of a stage in a length of not less than 5% (five percent) of the total length.
a) Breast wall		
PCC BW – 4.0m Ht.	23.80%	
Gabion BW - 6m Ht.	8.20%	
Gabion BW - 8m Ht.	6.00%	
b) Retaining /Toe wall		
PCC RW - 3m Ht.	0.90%	
PCC RW - 4m Ht.	0.55%	
PCC RW - 5m Ht.	0.70%	
Gabion RW - 6m Ht.	1.00%	
Gabion RW - 7m Ht.	0.65%	
Gabion RW - 8m Ht.	1.25%	
(vi) Side Slope Protection works Turfing and stone pitching		Unit of measurement is Sqm. Payment shall be made on pro-rata basis on completion of a stage in an area of not less than 5% (five percent) of the total quantity.
a) Cut slope protection soil nailing etc.	7.50%	
b) Fill Slope - Reinforced soil slope	5.00%	
c) Reinforced Soil wall	5.00%	

1.3.5 Electrical utilities and public Health Utilities (Water pipelines and sewage lines)

Procedure for estimating the value of other works done shall be as stated in table 1.3.5:

Table 1.3.5

Stage of Payment	Weightage	Payment Procedure
------------------	-----------	-------------------



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Stage of Payment	Weightage	Payment Procedure
(i) EHT line	41.71%	Unit of measurement is as per completed activities. Cost per activity shall be determined on pro-rate basis as per its weightage with reference to total cost of EHT line. Payment shall be made for completed activity. (The average weightage of major activities (only for payment purpose) in shifting work is (i) Erection of Poles-20%, (ii) Conductor stringing including laying of cable-30%, (iii) DTR erection (if involved)-15% and (iv) Charging of line including dismantling and site clearance-35% (with DTR) and 50% without DTR)
(ii) EHT crossings		Cost of each crossing shall be determined on pro-rata basis with reference to total no. of crossings. Payment shall be made for not less than 25% of the crossings subject to a minimum of 4.
(iii) HT/ LT line (including transformers if any)	15.14%	Unit of measurement is as per completed activities. Cost per activity shall be determined on pro-rata basis as per its weightage with reference to total cost of LT/ HT line. Payment shall be made for completed activity. (The average weightage of major activities (only for payment purpose) in shifting work is (i) Erection of Poles-20% (ii) Conductor stringing including laying of cable- 30%, (iii) DTR erection (if involved)-10% and (iv) Charging of line including dismantling and site clearance-40% (with DTR) and 50% without DTR)
(iv) HT/ LT crossings		Cost of each crossing shall be determined on pro-rata basis with reference to total no. of crossings. Payment shall be made for not less than 25% of the crossings subject to a minimum of 10 crossings.
(v) Water pipeline	43.14%	Unit of measurement is as per completed activities. Cost per activity shall be determined on pro-rata basis as per its weightage with reference to total cost of pipe line. Payment shall be made for completed activity. (The average weightage of major activities (only for payment purpose) in shifting work is laying of pipe-50%, Charging of line including all miscellaneous works and dismantling and site clearance-50%)
vi) water pipeline crossings		Cost of each crossing shall be determined on pro-rata basis with reference to total no. of crossings. Payment shall be made for not less than 25% of the crossings subject to a minimum of 8 crossings.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.





Technical Schedule

Stage of Payment	Weightage	Payment Procedure
(vii) Sewage lines	0.00%	Unit of measurement is as per completed activities. Cost per activity shall be determined on pro-rata basis as per its weightage with reference to total cost of pipe line. Payment shall be made for completed activity. (The average weightage of major activities (only for payment purpose) in shifting work is laying of pipe-50%, Charging of line including all miscellaneous works and dismantling and site clearance-50%)
(viii) Sewage line crossings		Cost of each crossing shall be determined on pro-rata basis with reference to total no. of crossings. Payment shall be made for completed activity. (The average weightage of major activities in shifting work is laying pipe-50%, Charging of line including all miscellaneous works and dismantling and site clearance-50%)

2 Procedure for payment for Maintenance.

- 2.1 The cost for maintenance shall be as stated in Clause 14.1. (i)
- 2.2 Payment for Maintenance shall be made in quarterly instalments in accordance with the provisions of Clause 19.7.

Schedule-I

	<p>Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.</p>	
	<p>Technical Schedule</p>	

Schedule - I

(See Clause 10.2 (iv))

3.1.1.1 1 Drawings

Drawings In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

3.1.1.2 2 Additional Drawings

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Annex – I

(Schedule - I)

List of Drawings

3.1.1.3 1 A minimum list of the drawings of the various components/elements of the project highway and project facility required to be submitted by the Contractor is given below:

- (a) Drawing of horizontal alignment, vertical profile and detailed cross sections;
- (b) Drawings of cross drainage works, i.e. Bridges/Culverts/Flyovers and Other Structures;
- (c) Drawings for River Training works;
- (d) Drawings of interchanges, major intersections and underpasses;
- (e) Drawing of control centre;
- (f) Drawings of road furniture items including traffic signage, marking, safety barriers, etc;
- (g) Drawings of traffic diversions plans and traffic control measures;
- (h) Drawings of road drainage measures;
- (i) Drawings of typical details slope protection measures;
- (j) Drawings of landscaping and horticulture;
- (k) Drawings of pedestrian crossing;
- (l) Drawings of street lighting;
- (m) General Arrangement showing Base Camp and Administrative Block;
- (n) Any other drawings as per instruction of Authority Engineer.

Schedule-J



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-J

((See Clause 10.3 (ii))

PROJECT COMPLETION SCHEDULE

1 Project Completion Schedule

During Construction period, the Contractor shall comply with the requirements set forth in this Schedule J for each of the Project Milestones and the **Scheduled Completion Date**. Within 15 (fifteen) days of the date of each Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

2 Project Milestone-I

- (i) Project Milestone-I shall occur on the date falling on the 320th (Three Hundred and Twenty) day from the Appointed Date (the "**Project Milestone-I**").
- (ii) Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 10% (ten per cent) of the Contract Price.

3 Project Milestone-II

- (i) Project Milestone-II shall occur on the date falling on the 548th (Five hundred and Forty Eighth) day from the Appointed Date (the "**Project Milestone-II**").
- (ii) Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 35% (thirty five per cent) of the Contract Price.

4 Project Milestone-III


- (i) Project Milestone-III shall occur on the date falling on the 776th (Seven hundred and Seventy Six) day from the Appointed Date (the "**Project Milestone-III**").
- (ii) Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 70% (seventy per cent) of the Contract Price and should have started construction of all project facilities.

5 Schedule Completion Date

- (i) The Scheduled Completion Date shall occur on the 912th (Nine Hundred Twelve) day from the Appointed Date.
- (ii) On or before the Scheduled Completion Date, the Contractor shall have completed



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

construction in accordance with this Agreement.

6 Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

Schedule-K



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-K

(See Clause 12.1 (ii))

Tests on Completion

1 Schedule for Tests

- (i) The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10 (ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- (ii) The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule K.

2 Tests

- (i) Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include all the tests specified in IRC code, manual and MORTH specifications for the road and Bridge works, 5th revision, 2013.
- (ii) Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometer.
- (iii) Tests for bridges: All major and minor bridges shall be subjected to the rebound hammer and ultrasonic pulse velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Nondestructive Testing Techniques, at two spots in every span, to be chosen at random by the Authority's Engineer. Bridges with a span of 15 (fifteen) meters or more shall also be subjected to load testing.
- (iv) Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with Good Industry Practice, for determining the compliance of the Project Highway with Specifications and



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Standards.

- (v) Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- (vi) Safety Audit: The Authority's Engineer shall carry out or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

3 Agency for conducting Tests

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

4 Completion Certificate

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

5 The Authority Engineer will carry out tests with following equipment at his own cos in the presence of contractor's representative

Sr. No.	Key metrics of Asset	Equipment to be used	Frequency of condition survey
1	Surface defects of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
2	Roughness of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
3	Strength of pavement	Falling Weight Deflectometer (FWD)	At least once a year
4	Bridges	Mobile Bridge Inspection Unit (MBU)	At least twice a year (As per survey months defined for the state basis rainy season)
5	Road signs	Retro-reflectometer	At least twice a year (As per survey months defined for the state basis rainy season)



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

The first testing with the help of NSV shall be conducted at the time of issue of Completion Certificate.

Schedule-L



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-L

(See Clause 12.2)

COMPLETION CERTIFICATE

- 1 I,(Name of the Authority's Engineer), acting as Authority's Engineer, under and in accordance with the Agreement dated(the "Agreement"), for construction of the **"Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte – Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode."** through (Name of Contractor), hereby certify that the Tests in accordance with Article 12 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement, and I am satisfied that the Project Highway can be safely and reliably placed in service of the Users thereof.
- 2 It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highway have been completed, and the Project Highway is hereby declared fit for entry into operation on this the.....day of..... 20.....

SIGNED, SEALED AND DELIVERED

For and on behalf of

The Authority's Engineer by:

(Signature)

(Name)

(Designation)

(Address)

Schedule-M



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-M

(See Clauses 14.6., 15.2 and 19.7)

PAYMENT REDUCTION FOR NON-COMPLIANCE

1 Payment reduction for non-compliance with the Maintenance Requirements

- (i) Monthly lump sum payments for maintenance shall be reduced in the case of non-compliance with the Maintenance Requirements set forth in Schedule-E.
- (ii) Any deduction made on account of non-compliance with the maintenance Requirements shall not be paid even after compliance subsequently. The deduction shall continue to be made every month until compliance is done.
- (iii) The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph 2.

2 Percentage reductions in lump sum payments

- (i) The following percentages shall govern the payment reduction:

S. No.	Item/Defect/Deficiency	Percentage
(a)	Carriageway/Pavement	
(i)	Potholes, cracks, other surface defects	15%
(ii)	Repairs of Edges, Rutting	5%
(b)	Road, Embankment, Cuttings, Shoulders	
(i)	Edge drop, inadequate crossfall, undulations, settlement, potholes, ponding, obstructions	10%
(ii)	Deficient slopes, raincuts, disturbed pitching, vegetation growth, pruning of trees	5%
(c)	Bridges and Culverts	
(i)	Desilting, cleaning, vegetation growth, damaged pitching, flooring, parapets, wearing course, footpaths, any damage to foundations	20%
(ii)	Any Defects in superstructures, bearings and sub-structures	10%
(iii)	Painting, repairs/replacement kerbs, railings, parapets, guideposts/crash barriers	5%
(d)	Roadside Drains	
(i)	Cleaning and repair of drains	5%
(e)	Road Furniture	



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

(i)	Cleaning, painting, replacement of road signs, delineators, road markings, 200 m/km/5th km stones	5%
(f)	Miscellaneous Items	
(i)	Removal of dead animals, broken down/accidented vehicles, fallen trees, road blockades or malfunctioning of mobile crane	10%
(ii)	Any other Defects in accordance with paragraph 1.	5%
(g)	Defects in Other Project Facilities	5%

- (ii) The amount to be deducted from monthly lump-sum payment for non-compliance of particular item shall be calculated as under:

$$R = P/100 \times M \times L1/L$$

Where: P = Percentage of particular item//Defect/deficiency for deduction

M = Monthly lump-sum payment in accordance with the Bid

L1 = Non-complying length

L = Total length of the road,

R = Reduction (the amount to be deducted for noncompliance for a particular item/Defect/deficiency)

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or noncompliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

Schedule-N



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-N

(See Clause 18.1 (i))

SELECTION OF AUTHORITY'S ENGINEER

1 Selection of Authority's Engineer

- (i) The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof or 'Guidelines for Employment of Consultants under Japanese ODA Loans' or a combination of certain provisions thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority's Engineer.
- (ii) In the event of termination of the Technical Consultants appointed in accordance with the provisions of above Paragraphs 1.1 to 1.3, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

2 Terms of Reference

The Terms of Reference for the Authority's Engineer (the "TOR") shall substantially conform with Annex 1 to this Schedule N.

3 Appointment of Government entity as Authority's Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority's Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority's Engineer.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Annex – I

(Schedule - N)

TERMS OF REFERENCE FOR AUTHORITY'S ENGINEER

1 Scope

- (i) These Terms of Reference (the “TOR”) for the Authority’s Engineer are being specified pursuant to the EPC Agreement dated..... (the “**Agreement**”), which has been entered into between the Ministry of Road Transport and Highways (the “**Authority**”) and (the “**Contractor**”) for **“Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte – Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.”** and a copy of which is annexed hereto and marked as Annex-A to form part of this TOR.
- (ii) The TOR shall apply to construction and maintenance of the Project Highway.

2 Definitions and interpretation

- (i) The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- (ii) References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.
- (iii) The rules of interpretation stated in Clauses 1.2, 1.3 and 1.4 of the Agreement shall apply, mutatis mutandis, to this TOR.

3 General

- (i) The Authority’s Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.
- (ii) The Authority’s Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority before determining:



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (a) any Time Extension;
 - (b) any additional cost to be paid by the Authority to the Contractor;
 - (c) the Termination Payment; or
 - (d) issuance of Completion Certificate or
 - (e) any other matter which is not specified in (a), (b), (c) or (d) above and which creates a financial liability on either Party.
- (iii) The Authority's Engineer shall submit regular periodic reports, at least once every month, to the Authority in respect of its duties and functions under this Agreement. Such reports shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.
- (iv) The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
- (v) The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
- (vi) In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

4 Construction Period

- (i) During the Construction Period, the Authority's Engineer shall review the Drawings furnished by the Contractor along with supporting data, including the geo-technical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1.6. The Authority's Engineer shall complete such review and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- (ii) The Authority's Engineer shall review any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (iii) The Authority's Engineer shall review the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty-one) days stating the modifications, if any, required thereto.
- (iv) The Authority's Engineer shall complete the review of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.
- (v) The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- (vi) The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.
- (vii) The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.
- (viii) The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- (ix) For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4.9, the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance.
- (x) The Authority's Engineer shall test check at least 50 (fifty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- (xi) The timing of tests referred to in Paragraph 4.9, and the criteria for acceptance/



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.

- (xii) In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.
- (xiii) The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- (xiv) In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.
- (xv) The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.4.
- (xvi) Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- (xvii) In the event that the Contractor carries out any remedial measures to secure the safety of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (xviii) The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate or Provisional Certificate, as the case may be. For carrying out its functions under this Paragraph 4.18 and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

5 Maintenance Period

- (i) The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- (ii) The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.
- (iii) The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in this behalf.
- (iv) In respect of any defect or deficiency referred to in Paragraph 3 of Schedule- E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.
- (v) The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause 14.5.

6 Determination of costs and time

- (i) The Authority's Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.
- (ii) The Authority's Engineer shall determine the period of Time Extension that is required to be determined by it under the Agreement.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (iii) The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause 18.5.

7 Payments

- (i) The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2.4 (d).
- (ii) Authority's Engineer shall -
- (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
- (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable to the Contractor, after adjustments in accordance with the provisions of Clause 19.10.
- (iii) The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.
- (iv) The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

8 Other duties and functions

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

9 Miscellaneous

- (i) A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authority forthwith.



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (ii) The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.
- (iii) Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an as-built survey illustrating the layout of the Project Highway and setback lines, if any, of the buildings and structures forming part of Project Facilities; and shall hand them over to the Authority against receipt thereof.
- (iv) The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- (v) The Authority's Engineer shall inform the Authority and the Contractor of any event of Contractor's Default within one week of its occurrence.

Schedule-O



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

SCHEDULE - O

(See Clauses 19.4 (i), 19.6 (i), and 19.8 (i))

Forms of Payment Statements

1 Stage Payment Statement for Works

The Stage Payment Statement for Works shall state:

- (a) The estimated amount for the Works executed in accordance with Clause 19.3.1 subsequent to the last claim;
- (b) Amounts reflecting adjustments in price for the aforesaid claim;
- (c) The estimated amount of each Change of Scope Order executed subsequent to the last claim;
- (d) Amounts reflecting adjustment in price, if any, for (c) above in accordance with the provisions of Clause 13.2.3 (a);
- (e) Total of (a), (b), (c) and (d) above;
- (f) Deductions:
 - (i) Any amount to be deducted in accordance with the provisions of the Agreement except taxes;
 - (ii) Any amount towards deduction of taxes; and
 - (iii) Total of (i) and (ii) above.
- (g) Net claim: (e) – (f) (iii);
- (h) The amounts received by the Contractor upto the last claim:
 - (i) For the Works executed (excluding Change of Scope orders);
 - (ii) For Change of Scope Orders, and
 - (iii) Taxes deducted

2 Monthly Maintenance Payment Statement

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the agreement;
- (b) the deductions for maintenance work not done;



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

- (c) net payment for maintenance due, (a) minus (b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction of taxes

3 Contractor's claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

Monthly Maintenance Payment Statement

The monthly Statement for Maintenance Payment shall state:

- (f) the monthly payment admissible in accordance with the provisions of the agreement;
- (g) the deductions for maintenance work not done;
- (h) net payment for maintenance due, (a) minus (b);
- (i) amounts reflecting adjustments in price under Clause 19.12; and
- (j) amount towards deduction of taxes

4 Contractor's claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

Schedule-P



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

Schedule-P

(See Clause 20.1)

INSURANCE

1 Insurance during Construction Period

- (i) The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the last Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire and terrorism:
 - (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
 - (b) Insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- (ii) The insurance under paragraph 1.1 (a) and (b) above shall cover the authority and the Contractor against all loss or damage from whatsoever cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

2 Insurance for Contractor's Defects Liability

The Contractor shall effect and maintain insurance cover for the works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and arises from a cause occurring prior to the issue of Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

3 Insurance against injury to persons and damage to property

- (i) The Contractor shall insure against each Party's liability for any loss, damage, death or bodily injury which may occur to any physical property (except things insured under Paragraph 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number of occurrences. The insurance



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

cover shall be not less than the Contract Price.

- (ii) The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:
 - (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works; and
 - (b) Damage which is and unavoidable result of the Contractor's obligations to execute the Works.

4 Insurance to be in joint names

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

Schedule-Q



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

SCHEDULE-Q

(See Clause 14.10)

Tests on Completion of Maintenance Period

1 Riding Quality test:

Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be 2,500 (two thousand five hundred) mm for each kilometer.

2 2. Visual and physical test:

The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include measurement of cracking, rutting, stripping and potholes and shall be as per the requirement of maintenance mentioned in Schedule-E.

Schedule-R



Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km *61+000 to km 77+500) on Silchar - Vairengte - Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode.



Technical Schedule

SCHEDULE-R

(See Clause 14.10)

Taking Over Certificate

I, (Name and designation of the Authority's representative) under and in accordance with the Agreement dated (the "Agreement"), for **"Four laning of Chhimluang - Kolasib section (Package-4) of NH-306 & NH-6 from Existing Chainage km 59+700 to km 86+000 (Design Chainage km 61+000 to km 77+500) on Silchar - Vairengte – Sairang road in the State of Mizoram under Bharatmala Pariyojna on EPC mode."** (Name of Contractor), hereby certify that the Tests on completion of Maintenance Period in accordance with Article 14 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement and I hereby certify that the Authority has Taken over the Project Highway from the Contractor on this day

SIGNED, SEALED AND DELIVERED

(Signature)

(Name and designation of Authority's Representative)

(Address)