Technical Schedules

FOR

Construction &Up-gradation to 2-Lane with paved shoulder from Km 80+675 (Start of Kishtwar Bypass) to Km 95+550 (End of Helmet Top) of length 14.875 Km including Link Road from Km 0+000 to Km 1+871 of Length (1+871) Total Length = 16+746 Km on Khellani – Kishtwar – Chattroo - Khanabal section of NH-244 in the Union Territory of Jammu and Kashmir on EPC Mode (Pack-IV)



NATIONAL HIGHWAYS & INFRASTRUCTURE DEVELOPMENT CORPORATION LTD.

(NHIDCL)

SCHEDULES

Schedule-A

(See Clauses 2.1 and 8.1)

Site of the Project

1. The Site

- (i) Site of the 2-lane project highway shall include land, buildings, structures, and road works as described in **Annex-I** of this Schedule-A.
- (ii) The dates of handing over the Right of Way to the Contractor are specified in **Annex-II** of thisSchedule-A.
- (iii) An inventory of the Site including the land, buildings, structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Contractor, and such inventory shall form part of the memorandum referred to in Clause 8.2 (i) of thisAgreement.
- (iv) The alignment plans of the Project Highway are specified in **Annex-III.** The proposed profile of the Project Highways shall be followed by the contractor with minimum FRL as indicated in the alignment plan. The Contractor, however, improve/upgrade the Road Profile as indicated in Annex-III based on site/design requirement.
- (v) The status of the environment clearances obtained or awaited is given in **Annex-IV**.

Annex - I

(Schedule-A)

Site

1. Site

The site of the 2-lane project highway comprises section of National Highway-244commencing from km 80+675 (Existing Ch. at km 97+075)to km 95+550 (Existing ch. at km 123+035)of length 14.875 km & Link Road From 0+000 TO 1+871 Of Length = 1.871 km Total Length = 16+746 km (Including Link Road) i.e.,Khellani-Kishtwar-Chattroo_Khanabal section in the Union Territory of Jammu &Kashmir. The land, carriageway and structures comprising the Site are described below.

2. Land

The Site of the Project Highway comprises the land (sum of land already in possession and land to be possessed) as described below:

Sr.	Design Cha	ainage (km)	Right of Way (m)	Remarks
No.	From	То		
1	80+675	80+900	10	
2	80+900	82+000	9	
3	82+000	82+500	11	
4	82+500	83+700	8	
5	83+700	84+000	7	
6	84+000	87+000	11	
7	87+000	89+200	7	
8	89+200	92+400	10	
9	92+400	92+700	7	
10	92+700	93+200	10	
11	93+200	95+550	7	

3. Carriageway

The existing carriage way of the Project Highway is two lane. The type of the existing pavement is flexible.

4. Major Bridges

The Site includes the following Major Bridges:

		-	Type of Structure	No. of Spans	Overall			
Sr. No.	Ex Chainage (km)	Foundation	Sub- structure	Super- structure	with span length (m)	Width (m)		
	Nil							

5. Road over-bridges (ROB)/ Road under-bridges (RUB)

The Site includes the following ROB (road over railway line)/RUB (road under railway line)

Sr.	Chainage	Type o	f Structure	No. of Spans with span length	Width (m)	ROB/		
No.	(km)	Foundation	Superstructure	(m)		RUB		
	Nil							

6. Grade separators

The Site includes the following grade separators:

Sr.	Chainage	Туре о	f Structure	No. of Spans with span length (m)	Width (m)			
No.	(km)	Foundation	Superstructure	No. of Spans with span length (m)	wiath (m)			
	Nil							

7. Minor bridges

The Site includes the following minor bridges:

Sr.		Ex		Type of Struct	No. of Spans with	Overall		
	о.	Chainage (km)	Foundation	Sub- structure Super- structure		span length (m)	Width (m)	
	Nil							

8. Railway level crossings

The Site includes the following railway level crossings:

Sr. No. Location		Location (km)	Remarks
		Nil	

9. Underpasses (vehicular, non-vehicular)

The Site includes the followingunderpasses:

Sr. No.	Chainage (km)	Type of Structure	No. of Spans with span length (m)	Width (m)		
Nil						

10. Culverts

The Site has the following culverts:

Sr.	Existing	Type of	Span Arrangement		NAP data to an			
No.	chainage	Structure	No.	Clear Span (m)	Width in m			
	Nil							

11. Bus bays

The details of bus bays on the Site are as follows:

Sr. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side				
	Nil							

12. Truck Lay byes

The details of truck lay byes are as follows:

Sr.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side			
No.							
	Nil						

13. Roadside drains

The details of the roadside drains are as follows:

Sr.	Locat	tion	Туре					
No.	o. From km to km		From km to km Masonry/cc (Pucca)					
	No. From km to km Masonry/cc (Pucca) Earthen (Kutcha) Nil							

14. Major junctions

The details of major junctions are as follows: On Main Carriageway

SI. No.	Existing Chainage	Remarks	Side	Туре
1	107+080	Major Junction	LHS	Y/Hair Pin
2	111+000	Major Junction	RHS	Υ
3	113+580	Major Junction	LHS+RHS (staggered)	X (staggered)

(NH: National Highway, SH: State Highway, MDR: Major District Road)

15. Minor junctions

The details of the minor junctions are as follows: On Main Carriageway

Sr. No.	Existing Chainage	Remarks	Side	Туре
1	100+680	Minor Junction	LHS	Υ
2	102+750	Minor Junction	RHS	Υ
3	105+347	Minor Junction	LHS	Υ
4	107+700	Minor Junction	RHS	Υ
5	108+800	Minor Junction	LHS	Left Hand Curve/Y
6	109+050	Minor Junction	LHS	Υ
7	109+350	Minor Junction	LHS+RHS (staggered)	X (staggered)
8	111+200	Minor Junction	RHS	Υ
9	112+420	Minor Junction	RHS	Υ
10	112+965	Minor Junction	RHS	Υ

16. Bypasses

The details of the existing road sections proposed to be bypassed are as follows:

Sr. No.	Io. Name of bypass (town) Chainage (km) From km to km		Length (in Km)
		Nil	

17. Others

Nil

Annex – II

(As per Clause 8.3 (i))

(Schedule-A)

Dates for providing Right of Way of Construction Zone

The dates on which the Authority shall provide Right of Way of Construction Zone to the Contractor on different stretches of the Site are stated below:

	Design C	hainage	Lanath	\A/: al±la		
Sr. No.	From (Km)	To (Km)	Length (m)	Width (m)	Date of providing ROW	
1	2		3	4	5	
	80+900	81+300	400	16		
	81+300	81+887	587	23		
	81+887	81+955	68	16		
	81+955	82+270	315	24		
	82+270	82+576	306	16		
	82+576	82+847	271	25		
(i) Full Right of Way	82+847	83+100	253	16	150 (One hundred and fifty) days	
(Full Width)	83+100	84+800	1700	23	after the Appointed Date	
	84+800	84+894	94	16		
	84+894	86+368	1474	22		
	86+368	86+460	92	16		
	86+460	88+945	2485	22		
	88+945	89+312	367	16		
	89+312	93+200	3888	25		
(ii) Part Right of	80+675	80+900	225	10	ROW will be provided on	
Way (part width)	93+200	95+550	2350	7	Appointed date	
(iii) Balance Right of	80+675	80+900	225	12	150 (One hundred and fifty) days	
way (width)	93+200	95+550	2350	18	after the Appointed Date	

Link Road from Chainage (0+000 to 1+871)

Design Cha	inage in Km	Length in m	DDOW in m	Date of providing POW
From	То		PROW in m	Date of providing ROW
0+000	0+270	270	14	150 (One hundred and fifty)
0+270	0+291	21	17	days after the Appointed
0+291	0+362	71	20	Date
0+362	0+500	138	16.5	
0+500	0+612	112	14	
0+612	1+595	983	16.5	
1+595	1+622	27	18.5	
1+622	1+871	249	16.5	

^{*} The dates specified herein shall in no case be beyond 150 (One hundred and fifty) days after the Appointed Date.

Annex - III

(Schedule-A)

Alignment Plans

The alignment of the Project Highway shall be modified in the following sections as per the alignment plan indicated below:

- (i) The alignment of the Project Highway is enclosed in alignment plan and indicated below. Finished road level indicated in the alignment plan shall be followed by the contractor as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.
- (ii) Traffic Signage plan of the Project Highway showing numbers & location of traffic signs is enclosed. The contractor shall, however, improve/upgrade upon the traffic signage plan as indicated in Annex-III based on site/design requirement as per the relevant specifications/IRC Codes/Manual.



Key Plan

Annex - IV

(Schedule-A)

Environment Clearances

As per EIA notification 2006 and its amendment S.O.2559 (E) Dt 22nd August 2013, S.O 996(E) Dt 10th April 2015, S.O 382(E) Dt 3rd February 2015 Environmental Clearance Exempted from the purview of the Environmental Impact Assessment.

[To be published in the Gazette of India, Extraordinary, Part II, Section 3, Sub-section(ii)]

MINISTRY OF ENVIRONMENT AND FORESTS NOTIFICATION

New Delhi, the 22nd August, 2013

S.O. 2559 (E).- Whereas by notification of the Government of India in the Ministry of Environment and Forests vide number S.O.1533(E), dated the 14th September, 2006 issued under sub-section (1) and clause (v) of sub-section (2) of section (3) of the Environment (Protection) Act, 1986 read with clause (d) of sub-rule (3) of rule 5 of the Environment (Protection) Rules, 1986, the Central Government directed that on and from the date of its publication, the required construction of new projects or activities or the expansion or modernization of existing projects or activities listed in the Schedule to the said notification entailing the capacity addition with change in process or technology and or product mix shall be undertaken in any part of India only after prior environmental clearance from the Central Government or as the case may be, by the State level Environment Impact Assessment Authority, duly constituted by the Central Government under sub-section (3) of section 3 of the said Act, in accordance with the procedure specified therein;

And whereas the Government of India in the Ministry of Environment and Forests had constituted a High Level Committee under the Chairmanship of Member (Environment and Forests and Science and Technology), Planning Commission, vide OM No.21-270/2008-IA.III dated the 11th December, 2012 to review the provisions of Environmental Impact Assessment Notification, 2006 relating to granting Environmental Clearances for Roads, Buildings and Special Economic Zone projects and provisions under the OM dated the 7th February, 2012 issued by the Ministry of Environment and Forests regarding guidelines for High Rise Buildings;

And whereas one of the terms of reference (ToR) of the Committee was to review the requirement of Environmental Clearance for highway expansion projects upto the right of way of 60 meters and length of 200 kms under Environmental Impact Assessment notification;

And whereas the Committee has submitted its report to the Ministry and on this ToR, the Committee has recommended exempting highway expansion projects from the requirement of scoping and that Environmental Impact Assessment or Environment Management Plan for highway expansion projects may be prepared on the basis of model ToRs to be posted on Ministry's website and in respect of requirement of environmental clearance, the Committee has recommended that expansion of National Highway projects up to 100 kms involving additional right of way or land acquisition upto 40 mts on existing alignments and 60 mts on re-alignments or by-passes may be exempted from the preview of the notification:

Schedule - B

(See Clause 2.1)

Development of the Project Highway

1. Development of the Project Highway

Development of the Project Highway shall include design and construction of the Project Highway as described in this Schedule-B and in Schedule-C.

2. Rehabilitation and augmentation

Rehabilitation and augmentation shall include 2-Laning and Strengthening of the Project Highway as described in Annex-I of this Schedule-B and in Schedule-C.

3. Specifications and Standards

The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-I of Schedule-D.

Annex - I

(Schedule-B)

Description of the Project

Construction & up-gradation to 2-Lane with paved shoulder from Km 80+675 (Start of Kishtwar Bypass i.e., Existing km 97+075) to Km 95+550(End of Helmet Top i.e., Existing km 123+035) of length 14.875Km including Link Road from Km 0+000 to Km 1+871of Length (1+871) Total Length = 16+746 Km on Khellani – Kishtwar – Chattroo - Khanabal section of NH-244 in the Union Territory of Jammu and Kashmir on EPC Mode.

1. Widening of Existing Highway

i. The Project Highway shall follow the existing alignment unless otherwise specified by the Authority and shown in the alignment plans specified in Annex-III of Schedule-A. Geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for hill/mountainous terrain to the extent land is available.

Main Carriageway: -

SL. No.	Design Cha	inage (km)	m) Langth (m)	Pomarks	
SL. NO.	From	То	Length (m)	Remarks	
1	80+675	80+922	247	Widening with 2- lane with PS	
2	80+922	95+290	14368	New 2-lane with PS (Kishtwar Bypass)	
3	95+290	95+550	260	Widening with 2- lane with PS	
Total Length		14875			

LinkRoad: -

SL.	Design Cha	inage (km)	Longth (m)	Domonko
No.	From	То	Length (m)	Remarks
1	0+000	1+871	1871	New 2-lane with PS
	Total Length		1871	
Total Project Length (Main carriageway and link road)		16746		

ii. Width of Carriageway

- (a) 2-Laningwith paved shoulders shall be undertaken for main road and link road. The paved carriageway shall be 10m wideaccordance with the typical cross section's drawings attached along with Schedule B.
- (b) Except as otherwise provided in this agreement, the width of the paved carriageway and cross-sectional features shall confirm to paragraph 1.1 above.

2. Geometric Design and General Features

(i) General

Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the Manual.

(ii) Design speed

The design speed shall be the maximum design speed of 60 Km/hr. and minimum design speed of 40 km/hr. for mountainous/hilly terrain as perIRC: SP-73:2018.

(iii) Improvement of the existing roadgeometrics

In the following sections, where improvement of the existing road geometrics to the prescribed standards.

Sl. No.	Stretch (from km to km)	Type of deficiency	Remarks
Nil			

(iv) Right of Way

Details of the Right of Way are given in Annex II of Schedule-A.

(v) Type of shoulders

(a) In built-up sections, footpaths/fully paved shoulders shall be provided in the followingstretches:

SI No	Stretch(from km to km)	Fully paved shoulders/	Reference to cross			
31.140.	Streten(nom kin to kin)	footpaths	section			
	Nil					

- (b) In open country/hilly areas, paved shoulders of 1.5m width shall be provided on either side and balance 1.0m width earthen shoulder at valley side only shall be covered with 150 mm thick compacted layer of granularmaterial for main road.
- (c) Design and specifications of paved shoulders and granular material shall conform to the requirements specified in the relevantManual.

(vi) Lateral and vertical clearances atunderpasses

- (a) Lateral and vertical clearances at underpasses and provision of guardrails/crash barriers shall be as per the provision of relevant Manual.
- (b) Lateral clearance: The width of the opening at the underpasses shall be as follows:

Sl.No.	Location (Chainage)	Span/ opening	Remarks
	(from km to km)	(m)	
		NIL	

(vii) Lateral and vertical clearances atoverpasses

- (a) Lateral and vertical clearances at overpasses shall be as per the provision of relevantManual.
- (b) Lateral clearance: The width of the opening at the overpasses shall be as follows:

Sl.No.	Location (Chainage) (from km to km)	Span/ opening (m)	Remarks
	Nil		

(viii) Serviceroads

Service roads shall be constructed at the locations and for the lengths indicated below:

SI.No.	Location of service road	Right hand side (RHS)/Left hand	Length (m) of
	(from km to km)	side (LHS)/ or Both sides	service road
		NIL	

(ix) Grade separatedstructures/Viaduct

(a) Grade separated structures shall be provided as per provision of the relevant Manual. The requisite particulars are givenbelow:

Sl. No.	Location of	Length (m)	Number and length of	Approach	Remarks, if	
SI. NO.	structure	Length (m)	spans (m)	gradient	any	
	Nil					

In the case of grade separated structures, the type of structure and the level of the Project Highway and the crossroads shall be as follows:

SI.		Type of structure	Cross road at			
No.	Location	Length (m)	Existing Level	Raised Level	Lowered Level	Remarks, if any
Nil						

(x) Cattle and pedestrian underpass/overpass

Cattle and pedestrian underpass/ overpass shall be constructed as follows:

Sl. No.	Location	Type of crossing
	Nil	

(xi) Viaduct/Viaduct cum Bridge

Viaduct shall be constructed as follows: Main Carriageway

SI. No.	Design Chainage in km	Span arrangement (No. x I)in m	Width (m)	Remarks
1	82+405	1 x 30 + 7 x 40	1 x 12.5	Type of structure to be adopted by the EPC contractor as per
2	84+830	4x25		best engineering practice & IRC, MoRT&H specifications by using innovative technologies approved the authority

Typical cross-sections of the Project Highway

Following typical cross sections shall be provided for the Project Highway However to be designed as per manual.

Sr. No.	TCS Detail	TCS Type	Length in (m)
1	Two Lane C/W with PS with Both Side Fill & Protection as Applicable (New Construction)	TCS-1	254
2	Two Lane C/W with PS With one side cut & one Side Fill & Protection as Applicable (New Construction)	TCS-2	970
3	Two Lane C/W with PS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	TCS-2A	10384
4	Two Lane C/W with PS With one side cut & one Side Fill & Protection as Applicable (Reconstruction)	TCS-3	70

Sr. No.	TCS Detail	TCS Type	Length in (m)
5	Two Lane C/W with PS With one side cut & one Side Fill &		
	Protection as Applicable with Wire Mesh/Cable Net Slope	TCS-3A	437
	Protection on Hill Side (Reconstruction)		
6	Two Lane C/W with PS with Both Side Cut & Protection as	TCS-4	210
	Applicable (New Construction)	103-4	210
7	Two Lane C/W with PS with Both Side Cut & Protection as		
	Applicable with Wire Mesh/Cable Net Slope Protection on	TCS-4A	770
	One Side of Hill (New Construction)		
8	Major Bridge	5Nos.	1180
9	Minor Bridge	10Nos.	190
10	Viaduct	1No.	310
11	Viaduct cum bridge	1no.	100
	Total Length in m		14875

Sr. No	TCS Detail	TCS Type	Length in (m)
1	Type - A - Typical Cross-Section for Two Lane Carriageway In Mountainous Terrain with Both Side Fill & Protection as Applicable. (New Construction)	90.000	
2	Type - B - Typical Cross-Section for Two Lane Carriageway In Mountainous Terrain with One Side Fill & One Side Cut with Protection on Either Side as Applicable (New Construction	TCS-B	1411.041
3	Type - C- Typical Cross-Section for Two Lane Carriageway In Mountainous Terrain with Both Side Cut With Protection On Either Side As Applicable (New Construction)	TCS-C	100.000
4	Major Bridge 1No.		270.000
	Total Length in m	_	1871.041

3. Intersections and Grade Separators

All intersections and grade separators shall be as per the provision of relevant Manual.

Properly designed intersections shall be provided at the locations and of the types and features given in the tablesbelow:

(i) At-gradeintersections

SI. No.	Location of intersection	Type ofintersection	Other features	Remarks
1	80+880	Т	Major	To Kishtwar
2	93+830	Y	Minor	To Thakrie
3	95+230	Y	Minor	To Kishtwar

SI. No.	Location of intersection	Type ofintersection	Other features	Remarks
1	00+000	Т	Minor	To Kishtwar
2	01+871	Y	Minor	To Kishtwar

(ii) Grade separated intersection with/withoutramps

SI. No.	Location	Salient features	Minimum length of viaduct to be provided	Road to be carried over/under the structures	
	Nil				

4. Road Embankment and Cut Section

- (i) Widening and improvement of the existing road embankment/cuttings and construction of new road embankment/ cuttings shall conform to the Specifications and Standards given in Section 4 of the Manual and the specified cross-sectional details. Deficiencies in the plan and profile of the existing road shall be corrected.
- (ii) Raising of the existing road.

The existing road shall be raised in the following sections:

Sl.No.	Section(from km to km)	Length	Extent of raising [Top of finished road level]		
Nil					

5. Pavement Design

- (i) Pavement design shall be carried out in accordance with the provision of relevant Manual.
- (ii) Type ofpavement

Flexible pavement with min. thickness is proposed for the project highway in accordance with IRC: 37-2018

Layer	Thickness (mm)
ВС	40
DBM	70
WMM (Upper layer)	125
WMM (Bottom layer)	125
GSB (Upper layer)	100
GSB (Bottom Layer)	100
Subgrade	500
Total Thickness	1060

- (iii) Design requirements
- (a) Design Period andstrategy

Flexible pavement for new pavement or for widening & strengthening of the existing pavement shall be designed for a minimum period of 20 years and rigidpavement shall be designed for a minimum design period of 30 years. Stage construction shall not be permitted.

(b) Design Traffic

Notwithstanding anything to the contrary contained in this Agreement or the Manual, the Contractor shall design the pavement for a minimum design traffic of 20(MSA) million standard axles.

(iv) Reconstruction of stretches

The following stretches of the existing road shall be reconstructed. These shall be designed as a new pavement.

Main Carriageway:

Length of Re-Construction stretch					
C# No	Design Cha	Lawath (lawa)			
Sr. No.	From	То	Length (km)		
1	80+675	80+922	0.247		
2	95+290	0.260			
	Total Length in Km 0.507				

6. Roadside Drainage

Drainage system including surface and subsurface drains for the Project Highway shall be provided as per the provision of relevantManual.

			PCC Drain		
Sr.	Design Chai	nage in km	Design	Side	Roadside Drain
No.	From	То	Length(m)	Side	Length (m)
1	80+675	80+922	247	RHS	247
2	81+297	81+866	569	RHS	569
3	81+941	82+090	149	RHS	149
4	82+090	82+200	110	LHS+RHS	220
5	82+200	82+250	50	RHS	50
6	82+560	82+640	80	RHS	80
7	82+640	82+720	80	LHS+RHS	160
8	82+720	82+825	105	RHS	105
9	83+075	83+280	205	RHS	205
10	83+280	83+320	40	LHS+RHS	80
11	83+320	83+940	620	RHS	620
12	83+990	84+300	310	RHS	310
13	84+300	84+370	70	LHS+RHS	140
14	84+370	84+780	410	RHS	410
15	84+880	85+510	630	RHS	630
16	85+510	85+580	70	LHS+RHS	140
17	85+580	86+078	498	RHS	498
18	86+093	86+350	257	RHS	257
19	86+440	86+570	130	RHS	130
20	86+570	86+610	40	LHS+RHS	80
21	86+610	86+792	182	RHS	182
22	86+817	86+973	156	RHS	156
23	86+998	87+855	857	RHS	857

	PCC Drain					
Sr.	Design Chai	nage in km	Design	Side	Roadside Drain	
No.	From	То	Length(m)	Side	Length (m)	
24	87+865	88+926	1061	RHS	1061	
25	89+330	89+690	360	RHS	360	
26	89+715	89+930	215	RHS	215	
27	89+930	89+990	60	LHS+RHS	120	
28	89+990	90+013	23	RHS	23	
29	90+023	90+475	452	RHS	452	
30	90+525	90+900	375	RHS	375	
31	90+910	90+940	30	RHS	30	
32	90+940	90+990	50	LHS+RHS	100	
33	90+990	91+230	240	RHS	240	
34	91+230	91+270	40	LHS+RHS	80	
35	91+270	91+340	70	RHS	70	
36	91+340	91+390	50	LHS+RHS	100	
37	91+390	91+750	360	RHS	360	
38	91+750	91+810	60	LHS+RHS	120	
39	91+810	91+835	25	RHS	25	
40	91+845	92+020	175	RHS	175	
41	92+020	92+080	60	LHS+RHS	120	
42	92+080	92+480	400	RHS	400	
43	92+480	92+520	40	LHS+RHS	80	
44	92+520	93+910	1390	RHS	1390	
45	94+000	94+050	50	RHS	50	
46	94+060	94+160	100	RHS	100	
47	94+260	94+470	210	RHS	420	
48	94+470	95+290	820	RHS	820	
49	95+290	95+480	190	RHS	190	
50	95+480	95+550	70	RHS	70	
	Total Ro	13821				

	PCC Drain						
Sr. No.	Design Chainage in km		Design Length	Side	Roadside Drain		
	From	То	(m)		Length (m)		
1	00+300	00+360	60	LHS+RHS	120		
2	00+360	00+440	80	RHS	80		
3	00+440	00+480	40	LHS+RHS	80		
4	00+480	01+400	920	RHS	920		
5	01+460	01+871	411.041	RHS	411.041		
	Total Roadside PCC Drainage Length						

Catch Water Drainage List				
Sr.	Design Chainage in	Design	Side	Roadside Drain
No.	km	Length(m)	Side	Length (m)

	From	То			
1	80+675	80+922	247	RHS	247
2	81+297	81+866	569	RHS	569
3	81+941	82+090	149	RHS	149
4	82+090	82+200	110	LHS+RHS	220
5	82+200	82+250	50	RHS	50
6	82+560	82+640	80	RHS	80
7	82+640	82+720	80	LHS+RHS	160
8	82+720	82+825	105	RHS	105
9	83+075	83+280	205	RHS	205
10	83+280	83+320	40	LHS+RHS	80
11	83+320	83+940	620	RHS	620
12	83+990	84+300	310	RHS	310
13	84+300	84+370	70	LHS+RHS	140
14	84+370	84+780	410	RHS	410
15	84+880	85+510	630	RHS	630
16	85+510	85+580	70	LHS+RHS	140
17	85+580	86+078	498	RHS	498
18	86+093	86+350	257	RHS	257
19	86+440	86+570	130	RHS	130
20	86+570	86+610	40	LHS+RHS	80
21	86+610	86+792	182	RHS	182
22	86+817	86+973	156	RHS	156
23	86+998	87+855	857	RHS	857
24	87+865	88+926	1061	RHS	1061
25	89+330	89+690	360	RHS	360
26	89+715	89+930	215	RHS	215
27	89+930	89+990	60	LHS+RHS	120
28	89+990	90+013	23	RHS	23
29	90+023	90+475	452	RHS	452
30	90+525	90+900	375	RHS	375
31	90+910	90+940	30	RHS	30
32	90+940	90+990	50	LHS+RHS	100
33	90+990	91+230	240	RHS	240
34	91+230	91+270	40	LHS+RHS	80
35	91+270	91+340	70	RHS	70
36	91+340	91+390	50	LHS+RHS	100
37	91+390	91+750	360	RHS	360
38	91+750	91+810	60	LHS+RHS	120
39	91+810	91+835	25	RHS	25
40	91+845	92+020	175	RHS	175
41	92+020	92+080	60	LHS+RHS	120
42	92+080	92+480	400	RHS	400
43	92+480	92+520	40	LHS+RHS	80
44	92+520	93+910	1390	RHS	1390
45	94+000	94+050	50	RHS	50
46	94+060	94+160	100	RHS	100
47	94+260	94+470	210	RHS	420

	Catch Water Drainage List					
Sr.	Design Chainage in km		Design S	Side	Roadside Drain	
No.	From	То	Length(m)		Length (m)	
48	94+470	95+290	820	RHS	820	
49	95+290	95+480	190	RHS	190	
50	95+480	95+550	70	RHS	70	
		13821				

Link Road Catch Water Drain

	The state of the s						
	Catch Water Drain						
Sr. No.	Design Chainage in km		Design Length	Side	Roadside Drain		
	From	То	(m)		Length (m)		
1	00+300	00+360	60	LHS+RHS	120		
2	00+360	00+440	80	RHS	80		
3	00+440	00+480	40	LHS+RHS	80		
4	00+480	01+400	920	RHS	920		
5	01+460	01+871	411.041	RHS	411.041		
	Total Roadside PCC Drainage Length						


7. Design of Structures

(i) General

- (a) All bridges, culverts and structures shall be designed and constructed in accordance with the provision of relevant Manual and shall conform to the cross- sectional features and other details specifiedtherein.
- (b) Width of the carriageway of new bridges and structures shall be asfollows:

Sr. No.	Central Chainage of Bridge	Width of carriageway and cross-sectional features*	Remarks
1	81+130	12.50 m	Major Bridge
2	81+924	12.50 m	Major Bridge
3	82+425	12.50 m	Viaduct
4	82+970	12.50 m	Major Bridge
5	84+850	12.50 m	Viaduct cum bridge
6	86+106	12.50 m	Minor Bridge
7	86+415	12.50 m	Major Bridge
8	86+825	12.50 m	Minor Bridge
9	87+006	12.50 m	Minor Bridge
10	87+880	12.50 m	Minor Bridge
11	89+141	12.50 m	Major Bridge
12	89+723	12.50 m	Minor Bridge
13	90+038	12.50 m	Minor Bridge
14	90+520	12.50 m	Minor Bridge
15	90+925	12.50 m	Minor Bridge
16	91+860	12.50 m	Minor Bridge
17	94+075	12.50 m	Minor Bridge

Sr. No.	Central Chainage of Bridge	Width of carriageway and cross-sectional features*	Remarks			
	Link Road					
1	0+140	12.50 m	Major Bridge			

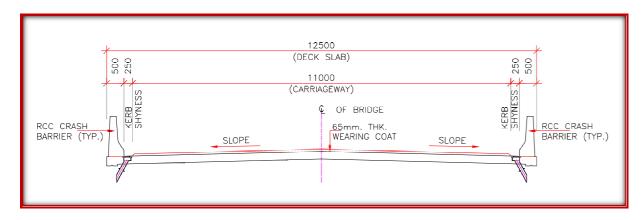

(c) The following structures shall be provided withfootpaths:

Sl. No.	Location at km	Span ArrangementNo.x Length (m)	Remarks			
	Nil					

(d) All bridges shall be high-level bridges.

Refer to the provision of relevant Manual and state if there is any exception.

(e) The following structures shall be designed to carry utility services specified in table below:

Sr. No.	Bridge at km	Utility service to be carried	Remarks			
1	81+130	Electricity cables, OFC cables etc.	Major Bridge			
2	81+924	Electricity cables, OFC cables etc.	Major Bridge			
3	82+425	Electricity cables, OFC cables etc.	Viaduct			
4	82+970	Electricity cables, OFC cables etc.	Major Bridge			
5	84+850	Electricity cables, OFC cables etc.	Viaduct cum bridge			
6	86+106	Electricity cables, OFC cables etc.	Minor Bridge			
7	86+415	Electricity cables, OFC cables etc.	Major Bridge			
8	86+825	Electricity cables, OFC cables etc.	Minor Bridge			
9	87+006	Electricity cables, OFC cables etc.	Minor Bridge			
10	87+880	Electricity cables, OFC cables etc.	Minor Bridge			
11	89+141	Electricity cables, OFC cables etc.	Major Bridge			
12	89+723	Electricity cables, OFC cables etc.	Minor Bridge			
13	90+038	Electricity cables, OFC cables etc.	Minor Bridge			
14	90+520	Electricity cables, OFC cables etc.	Minor Bridge			
15	90+925	Electricity cables, OFC cables etc.	Minor Bridge			
16	91+860	Electricity cables, OFC cables etc.	Minor Bridge			
17	94+075	Electricity cables, OFC cables etc.	Minor Bridge			
	Link Road					

Sr. No.	Bridge at km	Utility service to be carried	Remarks
1	0+140	Electricity cables, OFC cables etc.	Major Bridge

(f) Cross-section of the new culverts and bridges at deck level for the Project Highway shall conform to the typical cross-sections given in the provision of relevant Manual.

(ii) Culverts

- (a) Overall width of all culverts shall be equal to roadway width of the approaches.
- (b) Reconstruction of existing culverts: -Nil

New Culverts on Main Carriageway& Link Road

Sr. No.	Proposed centre Chainage in km	Span arrangement (Clear Span x Clear Height) in m	Structure Type	Remarks *
1	80+690	2x2	RCC BOX	New Construction
2	80+730	2x2	RCC BOX	New Construction
3	80+830	2x2	RCC BOX	New Construction
4	81+405	4x4	RCC BOX	New Construction
5	81+640	2x2	RCC BOX	New Construction
6	81+745	2x2	RCC BOX	New Construction
7	82+615	3X3	RCC BOX	New Construction
8	82+764	3x3	RCC BOX	New Construction
9	83+180	2X2	RCC BOX	New Construction
10	83+334	3x3	RCC BOX	New Construction
11	83+434	2x2	RCC BOX	New Construction
12	83+480	2x2	RCC BOX	New Construction
13	83+539	2x2	RCC BOX	New Construction
14	83+720	2x2	RCC BOX	New Construction
15	83+890	3x3	RCC BOX	New Construction
16	83+974	4X4	RCC BOX	New Construction
17	84+109	2X2	RCC BOX	New Construction
18	84+165	3X3	RCC BOX	New Construction
19	84+284	2x2	RCC BOX	New Construction
20	84+470	4X4	RCC BOX	New Construction
21	84+624	2X2	RCC BOX	New Construction
22	85+140	2x2	RCC BOX	New Construction
23	85+239	2x2	RCC BOX	New Construction
24	85+305	2X2	RCC BOX	New Construction
25	85+409	2x2	RCC BOX	New Construction
26	85+474	2x2	RCC BOX	New Construction
27	85+600	4X4	RCC BOX	New Construction
28	85+860	2x2	RCC BOX	New Construction
29	85+914	2X2	RCC BOX	New Construction
30	86+539	3X3	RCC BOX	New Construction
31	86+635	3x3	RCC BOX	New Construction
32	87+159	2x2	RCC BOX	New Construction
33	87+254	2x2	RCC BOX	New Construction
34	87+370	2x2	RCC BOX	New Construction
35	87+914	2X2	RCC BOX	New Construction

Sr. No.	Proposed centre Chainage in km	Span arrangement (Clear Span x Clear Height) in m	Structure Type	Remarks *
36	88+120	2x2	RCC BOX	New Construction
37	88+320	2x2	RCC BOX	New Construction
38	88+570	2x2	RCC BOX	New Construction
39	88+681	2x2	RCC BOX	New Construction
40	89+430	2x2	RCC BOX	New Construction
41	89+910	2x2	RCC BOX	New Construction
42	90+409	2x2	RCC BOX	New Construction
43	90+815	3x3	RCC BOX	New Construction
44	91+020	2x2	RCC BOX	New Construction
45	91+205	2x2	RCC BOX	New Construction
46	91+440	2x2	RCC BOX	New Construction
47	91+705	2x2	RCC BOX	New Construction
48	91+929	2x2	RCC BOX	New Construction
49	92+005	2x2	RCC BOX	New Construction
50	92+089	3x3	RCC BOX	New Construction
51	92+190	3X3	RCC BOX	New Construction
52	92+230	2X2	RCC BOX	New Construction
53	92+305	3x3	RCC BOX	New Construction
54	92+415	2X2	RCC BOX	New Construction
55	92+709	2X2	RCC BOX	New Construction
56	92+809	3x3	RCC BOX	New Construction
57	92+950	2X2	RCC BOX	New Construction
58	93+039	3X3	RCC BOX	New Construction
59	93+105	2x2	RCC BOX	New Construction
60	93+199	2x2	RCC BOX	New Construction
61	93+364	2X2	RCC BOX	New Construction
62	93+505	3x3	RCC BOX	New Construction
63	93+670	3x3	RCC BOX	New Construction
64	93+940	3x3	RCC BOX	New Construction
65	94+215	2X2	RCC BOX	New Construction
66	94+480	2X2	RCC BOX	New Construction
67	94+655	2X2	RCC BOX	New Construction
68	94+755	2X2	RCC BOX	New Construction
69	95+280	2X2	RCC BOX	New Construction
70	95+465	2X2	RCC BOX	New Construction
	1	Link Road		T
1	0+394	2x2	RCC BOX	New Construction
2	0+540	2x2	RCC BOX	New Construction
3	0+600	2x2	RCC BOX	New Construction
4	0+700	2x2	RCC BOX	New Construction
5	0+790	2x2	RCC BOX	New Construction
6	1+085	4x4	RCC BOX	New Construction
7	1+185	2x2	RCC BOX	New Construction
8	1+445	3x3	RCC BOX	New Construction
9	1+525	2x2	RCC BOX	New Construction

Sr. No.	Proposed centre Chainage in km	Span arrangement (Clear Span x Clear Height) in m	Structure Type	Remarks *
10	1+575	3x3	RCC BOX	New Construction
11	1+775	2x2	RCC BOX	New Construction
12	1+840	2x2	RCC BOX	New Construction

^{*}Specify modifications, if any, required in the road level, etc.

(c) Widening of existing culverts:

All existing culverts which are not to be reconstructed shall be widened to the roadway width of the Project Highway as per the typical cross section given in the provision of relevant Manual. Repairs and strengthening of existing structures where required shall be carried out.

SI. No.	Culvert location	Type, span, height and width of existing culvert (m)	Repairs to be carried out [specify]		
	Nil				

(d) Additional new culverts shall be constructed as per particulars given in the tablebelow:

Sr. No.	Proposed centre Chainage	Span arrangement (No. x Length x Ht.) in m	Structure Type	Remarks
Nil				

(e) Repairs/replacements of railing/parapets, flooring and protection works of the existing culverts shall be undertaken as follows:

SI. No.	Location at km	Type of repair required	
Nil			

(f) Floor protection works shall be as specified in the relevant IRC Codes and Specifications.

(iii) Bridges

- (a) Existing bridges to be re-constructed/widened
- (i) The existing bridges at the following locations shall be re-constructed as newStructures

SI. No.	Bridge location (km)	Salient details of existing bridge	Adequacy or otherwise of the existing waterway, vertical clearance, etc.*	Remarks	
	Nil				

^{*}Attach GAD

(ii) The following narrow bridges shall bewidened:

SI.	Location (km)	Existing width	Extent of widening	Cross-section at deck level for	
No.	Location (km)	(m)	(m)	widening @	
	Nil				

@ Attach cross-section

(b) Additional Newbridges

New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.

Major Bridge: -

Sr. No.	Design Chainage in km	Span arrangement (No.xLength) in m	Total length in m	Overall Width in m	Type of Superstructure
1	81+110	3x25+225+3x25	375	1 x 12.5	Type of structure
2	81+904	3x25	75	1 x 12.5	to be adopted by
3	82+950	1x30.0+180+2x20	250	1 x 12.5	the EPC contractor as per best
4	86+395	1 x 20 + 2 x 25 + 1x 20	90	1 x 12.5	engineering practice & IRC
5	89+121	3 x 25 + 250 + 2 x 25 + 1 x 15	390	1 x 12.5	MoRT&H specifications by using innovative technologies
		approved the			
1	00+140	32.5+180+32.5+25	270	1 x 12.5	approved the authority

Minor Bridge: -

Sr. No.	Design Chainage in km	Span arrangement (No x Length) in m	Total length in (m)	Overall Width in (m)	Remarks
1	86+086	1x15	15	1 x 12.5	
2	86+805	1 x 25	25	1 x 12.5	
3	86+986	1 x 25	25	1 x 12.5	Type of structure to be adopted by the
4	87+860	1x10	10	1 x 12.5	EPC contractor as per best engineering
5	89+703	1x25	25	1 x 12.5	practice & IRC, Mort&H
6	90+018	1x10	10	1 x 12.5	specifications by using innovative
7	90+500	2x25	50	1 x 12.5	technologies approved the
8	90+905	1x10	10	1 x 12.5	authority
9	91+840	1x10	10	1 x 12.5	
10	94+055	1x10	10	1 x 12.5	

Bridge cum Viaduct

Sr. No.	Proposed centre Chainage	Span arrangement (NoxLength)	Total length in m	Overall Width in m	Type of Superstructure
1	82+405	1 x 30 + 7 x 40	310	1 x 12.5	Type of structure to be adopted by the EPC contractor as
2	84+830	4x25	100	1 x 12.5	per best engineering practice & IRC,

(c) The railings of existing bridges shall be replaced by crash barriers at the following locations:

Sl. No.	Location at km	Remarks	
Nil			

(d) Repairs/replacements of railing/parapets of the existing bridges shall be undertaken as follows:

SI. No.	Location at km	Remarks
		Nil

(e) Drainage system for bridgedecks

An effective drainage system for bridge decks shall be provided as specified in the provision of relevant Manual

(f) Structures in marineenvironment

Refer to the provision of relevant Manual and specify the necessary measures/ treatments for protecting structures in marine environment, where applicable.

- (iv) Rail-roadbridges
 - (a) Design, construction and detailing of ROB/RUB shall be as specified in the provision of relevant Manual [Refer to the provision of relevant Manual and specify modification, ifany]
 - (b) Roadover-bridges

Road over-bridges (road over rail) shall be provided at the following level crossings, as per GAD drawings attached:

SI.No.	Location of Level crossing (Chainage km)	Length of bridge (m)	
	Nil		

(c) Roadunder-bridges

Road under-bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

SI. No. Location of Level crossing N	umber and length of span (m)
--------------------------------------	------------------------------

	(Chainage km)	
Nil		

(v) Grade separatedstructures

The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2 (ix) and 3 of this Annex-I.

(vi) Repairs and strengthening of bridges and structures

The existing bridges and structures to be repaired/strengthened, and the nature and extent of repairs /strengthening required are given below:

(a) Bridges

Sl.No.	Location of bridge (km)	Nature and extent of repairs	
		/strengthening to be carried out	
Nil			

(b) ROB/RUB

Sl.No.	Location of ROB/RUB (km)	Nature and extent of repairs /strengthening	
		to be carried out	
Nil			

(c) Overpasses/Underpasses and otherstructures

	Sl.No.	Location of Structure (km)	Nature and extent of repairs /strengthening	
			to be carried out	
Ī	Nil			

(vii) List of Bridges and Structures

The following is the list of the Bridges and Structures:

Sr. No.	Design Chainage	Type of Structure	
	Major Bridge		
1	81+110	Major Bridge	
2	81+904	Major Bridge	
3	82+950	Major Bridge	
4	86+395	Major Bridge	
5	89+121	Major Bridge	
	Liı	nk Road	
6	0+140	Major Bridge	
Minor Bridge			
1	86+086	Minor Bridge	
2	86+805	Minor Bridge	
3	86+986	Minor Bridge	
4	87+860	Minor Bridge	
5	89+703	Minor Bridge	
6	90+018	Minor Bridge	
7	90+500	Minor Bridge	
8	90+905	Minor Bridge	
9	91+840	Minor Bridge	
10	94+055	Minor Bridge	

Viaduct/ Viaduct cum Bridge		
1	82+405	Viaduct
2	84+830	Viaduct cum Bridge

8. Traffic Control Devices and Road Safety Works

- (i) Traffic control devices and road safety works shall be provided in accordance with the section 9 of the manual referred to in Schedule D.
- (ii) Specificationsofthereflectivesheetingas per IRC :67-2012 has been provided.

8.1 Crash Barrier

- (a) Min. length 12304m of Thriemetal beamcrash barrier shall be provided along the project highway as per section 9 of the manual. It shall be provided at Culvert/ bridge approaches on both sides and at location of embankment with height greater than or equal to 3m.
- (b) The concrete crash barrier/ railing of bridge and culvert shall be painted in black and white stripes in general.

8.2 Transverse Rumble strip

Transverse rumble strips in the form of thermoplastic bar marking shall be provided to warn the drivers to reduce the speed for safety. Stripes shall be in full width of pavement. The stripes shall be provided at sharp curves, village approaches, location approaching access road, intersections, and any other hazardous locations on the project highway. Guidelines of IRC-35 shall be followed.

9. Roadside Furniture

- (i) Roadside furniture shall be provided in accordance with the provision of relevant Manual.
- (ii) Overhead traffic sign: Full Gantry with 2nos.
- (iii) Road Marking and Signage

The following road marking, signage and safety devise shall be used on the project which is minimum. Further if any shall be in accordance with the section 9 of the manual referred to in Schedule D.

The minimum quantity of Traffic signages and pavement marking as per IRC: 35-2015 are tabulated here:

SI. No.	Traffic Signages, Road Marking and other appurtenances	unit	Quantity
1	Road Marking: -Lines, dashes, arrows	Sq. m	4885
2	900 mm triangular	Nos.	67
3	600 mm circular	Nos.	76
4	Rectangular 900 X 300 mm	Nos.	348
5	Rectangular 600x500 mm	Nos.	336
6	Rectangular 800x600 mm	Nos.	20
7	5th Km Stone	Nos.	3
8	Ordinary Km Stone	Nos.	13
9	Hectometer Stone	Nos.	67
10	Raised Road Marker (Studs)	Nos.	10485
11	Boundary pillars	Nos.	168

SI. No.	Traffic Signages, Road Marking and other appurtenances	unit	Quantity
12.1	Utility Ducts	Lm	33492
12.2	Utility Chambers	Nos	170

10. Compulsory Afforestation

Refer to the provision of relevant Manual and 4464 number of trees which are required to be planted by the Contractor as compensatory afforestation.

11. Hazardous Locations

The safety barriers shall also be provided at the following hazardous locations:

Sl. No.	Location stretch from (km) to (km)	LHS/RHS
Nil		

12. Special Requirement for Hill Road

This shall be provided accordance with section 13 of the Manual.

The side slope shall be protected by using suitable slope protection measures all along the highway on Hill side and valley side. The retaining wall/Toe wall, gabion wall and Soil nailing or Rock Bolting shall be constructed as per requirement of site condition in accordance with manual requirement. However, minimum length of protection works shall be construction as per details given below and the typical section of protection work are given in **Schedule B-1**.

a) Retaining wall shall be constructed on Main Road& Link Roadwith varying ht.4.0m to 5.0m ht. as per site condition of stone masonry in cement mortar 1:3 or any other better material acceptable to the Authority Engineer. Contractors need to access the same and bid accordingly.

Main Carriageway: -

Retaining Wall: Left Hand Side				
Design Chainage in m		Length in m	Haight Adapted in m	
From	То	Length III III	Height Adopted in m	
750	830	80	3.50	
890	900	10	3.50	
980	990	10	3.50	
1010	1020	10	3.00	
1040	1090	50	3.00	
1110	1120	10	4.00	
1170	1210	40	3.50	
1310	1320	10	3.50	
1350	1370	20	3.50	
1400	1410	10	3.50	
1460	1470	10	3.50	
1520	1530	10	3.50	
1730	1740	10	3.00	
84690	84750	60	3.50	
84920	84960	40	4.50	

Retaining Wall: Left Hand Side			
Design Chair	1	Length in m	Height Adopted in m
From	To		
85000	85120	120	4.50
85150	85230	80	4.50
85260	85270	10	5.00
85310	85320	10	3.50
85340	85400	60	4.50
85450	85490	40	4.50
85580	85590	10	3.50
85630	85690	60	3.50
85840	85850	10	4.50
85870	86010	140	3.50
86030	86060	30	3.00
86160	86180	20	3.50
86280	86320	40	4.00
86450	86460	10	3.50
86650	86660	10	3.50
86690	86750	60	4.00
86880	86890	10	4.50
86910	86950	40	4.50
87070	87110	40	4.00
87130	87200	70	4.00
87310	87350	40	4.00
87380	87390	10	4.00
87410	87420	10	4.00
87470	87500	30	4.00
87520	87670	150	3.50
87740	87780	40	3.00
87830	87840	10	3.00
87910	87960	50	4.00
87980	88040	60	4.50
88130	88160	30	3.00
88180	88190	10	4.00
88220	88290	70	3.50
88320	88400	80	3.50
88470	88510	40	3.50
88540	88550	10	3.50
88580	88640	60	4.00
88790	88910	120	4.00
Total Le		2210	1.23

Link Road

Retaining Wall: Left Hand Side			
Design Ch	Design Chainage in m		Height Adopted
From	То	m	in m
750	830	80	3.50
890	900	10	3.50
980	990	10	3.50
1010	1020	10	3.00
1040	1090	50	3.00
1110	1120	10	4.00
1170	1210	40	3.50
1310	1320	10	3.50
1350	1370	20	3.50
1400	1410	10	3.50
1460	1470	10	3.50
1520	1530	10	3.50
1730	1740	10	3.00
Total	Length	280	

Retaining Wall: Right Hand Side				
Design Chai	Design Chainage in m		Height Adopted in	
From	То	Length in m	m	
81450	81460	10	4.00	
81530	81550	20	3.50	
81580	81620	40	4.00	
81680	81690	10	4.00	
81990	82010	20	2.50	
82060	82070	10	3.00	
86070	86080	10	4.00	
89350	89420	70	4.00	
89460	89480	20	4.00	
89850	89910	60	4.00	
90250	90290	40	4.00	
90310	90330	20	4.00	
90600	90640	40	4.50	
90920	90930	10	4.00	
91030	91040	10	3.00	
91140	91190	50	4.00	
91310	91330	20	2.50	
91470	91500	30	4.50	
91550	91630	80	4.00	
91940	91990	50	4.00	
92120	92140	20	4.00	

Retaining Wall: Right Hand Side				
Design Chai	nage in m	Length in m	Height Adopted in	
From	То	Length in in	m	
92630	92650	20	4.00	
92670	92720	50	3.50	
92750	92770	20	4.00	
93010	93020	10	3.50	
93060	93080	20	3.50	
93220	93250	30	4.00	
93280	93320	40	4.50	
93450	93460	10	4.50	
93480	93490	10	4.00	
93560	93640	80	4.50	
93720	93750	30	4.50	
93910	93950	40	3.00	
94210	94230	20	2.50	
94470	94510	40	3.50	
94540	94550	10	4.00	
94580	94590	10	2.50	
94810	94820	10	3.00	
94840	94880	40	3.50	
95030	95050	20	3.50	
95130	95150	20	3.50	
95490	95510	20	3.00	
Total L	ength	1190		

Retaining Wall: Right Hand Side					
Design Chai	Design Chainage in m				
From	То	Length in m	Height Adopted in m		
370	420	50	4.00		
510	570	60	3.00		
Total Le	ength	110			

b) Breast wall shall be constructed with minimum length is 11250 m on main Road & is 670m on Link Road with heightof 3m of height, as per site condition of stone masonry in cement mortar or any other better material acceptable to the Authority Engineer. Contractors need to access the same and bid accordingly.

BREAST WALL LIST Left			
Design Chainage in km			
From	То	Length in m	Height in m
81300	81770	470	3.00

BREAST WALL LIST Left			
Design Chainage in km		Longth in m	Haiahtin na
From	То	Length in m	Height in m
81810	81860	50	3.00
81940	82250	310	3.00
82560	82820	260	3.00
89330	89680	350	3.00
89730	90010	280	3.00
90050	90450	400	3.00
90570	90880	310	3.00
90910	91120	210	3.00
91140	91700	560	3.00
91720	91820	100	3.00
91860	93030	1170	3.00
93050	93660	610	3.00
93680	93770	90	3.00
93870	93890	20	3.00
94320	94470	150	3.00
94540	95030	490	3.00
95120	95280	160	3.00
95320	95440	120	3.00
95480	95550	70	3.00
Total L	ength	6180	

BREAST WALL LIST Left				
Design Chainage in km				
From	То	Length in m	Height in m	
300	380	80	3.00	
430	490	60	3.00	
Total	Length	140		

	BREAST WALL LIST Right				
Design Chai	Design Chainage in km		Hoight in m		
From	То	Length in m	Height in m		
80730	80750	20	3.00		
80770	80900	130	3.00		
82650	82660	10	3.00		
83080	83570	490	3.00		
83610	83710	100	3.00		
83730	83860	130	3.00		
83900	83920	20	3.00		
83990	84150	160	3.00		
84180	84460	280	3.00		
84490	84780	290	3.00		
84880	85280	400	3.00		
85310	86050	740	3.00		

BREAST WALL LIST Right			
Design Chainage in km		1 a.a. a.t.la i.a	11 a l a la b a l a a a a
From	То	Length in m	Height in m
86120	86320	200	3.00
86460	86750	290	3.00
86840	86960	120	3.00
87020	87240	220	3.00
87310	87610	300	3.00
87640	87750	110	3.00
87770	87840	70	3.00
87890	87900	10	3.00
87940	88540	600	3.00
88580	88910	330	3.00
89950	89960	10	3.00
94360	94400	40	3.00
Total Le	ength	5070	

BREAST WALL LIST Right			
Design Chainage in km		1	Height in m
From	То	Length in m	Height in m
710	720	10	3.00
810	860	50	3.00
890	920	30	3.00
940	950	10	3.00
970	1010	40	3.00
1130	1150	20	3.00
1190	1200	10	3.00
1220	1330	110	3.00
1350	1390	40	3.00
1460	1560	100	3.00
1590	1620	30	3.00
1710	1750	40	3.00
1820	1840	20	3.00
Total Le	ength	530	

c) Gabion wall shall be in wire crates in accordance with applicable clause of section 2500 of MoRTH specification for road and bridge works (fifth revision) and accordance with IRC: SP: 48-1998 and IRC: 56-2011. Minimum length is 2540m on Main road& 60m on Link Road(ht. from5.5m to9.0m). Contractors need to access the same and bid accordingly.

Gabion Wall on Left Hand Side			
Design Chainage in km		Longth in m	Unight in m
From	То	Length in m	Height in m
83330	83360	30	8.50
83560	83600	40	7.00
83850	83980	130	7.00
84090	84110	20	6.00

Gabion Wall on Left Hand Side			
Design Chainage in km		Lamath to	
From	То	Length in m	Height in m
84150	84170	20	8.50
84470	84490	20	7.00
84760	84780	20	8.50
84970	84990	20	5.50
85130	85140	10	5.50
85240	85250	10	5.50
85280	85300	20	5.50
85410	85420	10	5.50
85600	85620	20	6.00
86070	86080	10	7.00
86520	86560	40	7.50
86620	86640	20	5.50
86760	86790	30	10.00
86820	86830	10	7.00
86960	86970	10	8.00
87000	87020	20	8.00
87250	87300	50	7.00
87360	87370	10	5.50
87430	87460	30	7.00
87810	87820	10	7.00
88050	88060	10	5.50
88200	88210	10	6.00
88560	88570	10	5.50
88650	88690	40	8.00
88770	88780	10	7.00
89300	89310	10	9.00
Total Le	ength	700	

Gabion Wall on Left Hand Side			
Design Chainage in km		Length in	Uniaht in m
From	То	m	Height in m
870	880	10	5.50
1420	1450	30	7.00
1500	1510	10	7.00

Gabion Wall on Right Hand Side			
Design Chainage in km			
From	То	Length in m	Height in m
81300	81340	40	8.50
81360	81440	80	9.50
81630	81650	20	7.00
81700	81760	60	8.50
82210	82220	10	7.00

Gabion Wall on Right Hand Side			
Design Chai	nage in km	Lanath in m	Height in m
From	То	Length in m	Height in m
82240	82250	10	7.50
82740	82770	30	8.50
89300	89340	40	8.50
89430	89450	20	6.00
89490	89530	40	7.50
89610	89640	30	10.00
89670	89690	20	8.00
89750	89770	20	9.50
89820	89840	20	7.00
90040	90200	160	8.00
90450	90470	20	8.50
90530	90590	60	8.00
90750	90880	130	9.50
90900	90910	10	7.00
91110	91130	20	7.00
91400	91460	60	7.00
91510	91540	30	6.00
91700	91730	30	8.50
91820	91830	10	5.50
91920	91930	10	6.00
92080	92110	30	8.50
92150	92240	90	7.00
92300	92460	160	7.50
92530	92620	90	8.50
92810	92830	20	7.00
92870	92960	90	7.50
93030	93050	20	6.00
93090	93120	30	9.00
93170	93210	40	7.00
93260	93270	10	6.00
93330	93440	110	8.00
93500	93550	50	7.00
93650	93710	60	7.00
94520	94530	10	6.00
94990	95020	30	6.00
95100	95120	20	5.50
Total L	ength	1840	

Gabion Wall on Right Hand Side			
Design Chainage in km		Landle in a	Haiahtin m
From	То	Length in m	Height in m
76600	76610	10	7.50
Total Length		10	

d) Wire mesh with bio engineering and barbed wire must be provided as per site condition as per design and specification. Contractors need to access the same and bid accordingly.

Main Carriageway: -

-	Wire Mesh			
Design Chainage in km		Side	Length (m)	
From	То			
80690	80700	RHS	10	
80750	80770	RHS	20	
80790	80920	RHS	130	
82670	82680	RHS	10	
83100	83590	RHS	490	
83630	83730	RHS	100	
83750	83880	RHS	130	
83920	83940	RHS	20	
84010	84170	RHS	160	
84200	84480	RHS	280	
84510	84780	RHS	270	
84900	85300	RHS	400	
85330	86070	RHS	740	
86140	86340	RHS	200	
86480	86770	RHS	290	
86860	86980	RHS	120	
87040	87260	RHS	220	
87330	87630	RHS	300	
87660	87770	RHS	110	
87790	87860	RHS	70	
87910	87920	RHS	10	
87960	88560	RHS	600	
88600	88930	RHS	330	
Total length in m			5010	

13. SAFETY AND TRAFFIC MANAGEMENT DURING CONSTRUCTION: -

(a) Temporary of Diversion existing road/Bridge portion including maintenance existing road:

Diversion road at bridge locations & main road

- 1) Portable Type Barricade in Construction Zone -1900 Nos
- 2) Traffic Signs & making for Diversion- Road Work ahead, Man at work, Hazard Marker, Traffic Diversion, Chevron, Speed Limit, Restriction Ends, Flag Man, Overtaking Prohibited, Work Traffic Exit, Drum Delineator
- 3) Maintenance of existing road in traffic worthy condition (filling potholes, patches etc.)

(b) clearance of land slide & snow

1)Rock fall protection during construction period (Providing and fixing 2.5 metres high fencing with vertical angle iron posts 150 mm x 150 mm x 10 mm placed & every 0.5 metres centre to

centre founded in M15 grade cement concrete, 0.6 metre below ground level and three horizontal iron angle 50mm x 50mm x6mm for connecting vertical post-650m

2) Temporary shed for Landslide – 2 Nos

Note: Contractor must be use Standard Specification/ given Annexure B or better in accordance with IRC & Mort&H Specification

14. Environment Management and Muck Disposal management:

(a) Muck Dumping Location:

The muck to be generated shall be appropriately dumped in tips at various suitable locations so that it does not degrade the various elements of the natural environment. For final disposal of the material convenient locations have been identified viz-a-viz to environmental aspects. The most suitable locations for dumping of the muck that would be generated from the Khellani-Kishtwar-Chattroo-Khanabal road.

Location specified in the Schedule is tentative and approximate assessment the actual as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the specified in this Schedule B shall not constitute a Change of Scope.

Details of Environment Management and Muck Disposal Management are as under:

SI. No.	Area name	Muck Dumping no.	Coordinates	Remarks
1	Km 74+000	MD9	33°13'11.35"N 75°47'46.04"E	
2	Km 92+600	MD15	33°21'14.72"N 75°44'9.17"E	Site suitable engineering structures to be
3	Km 93+000	MD11	33°21'22.68"N 75°43'52.66"E	provided at these location
4	Km 96+100	MD12	33°22'43.15"N 75°42'56.40"E	

(b) Environment Management Plan:

Contractor shall submit their Environmental Management Plan in accordance with the latest guidelines of MoEF&CC. And same will be checked and approved by the Authority Engineer.

15. Change of Scope

The length of Structures and bridges, muck disposal sites specified hereinabove shall be treated as an approximate assessment. The actual lengths as required based on detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule- B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of **Article 13**.

16. Chainages wise indicative widening scheme with applicable typical Cross section

Main Carriageway Chainage From 80+675 to 95+500 Total Length = 14.875Km

SL	Chainage in m		Length	TCS Type	TCC DETAILS
No	From	То	(m)	ics type	TCS DETAILS

SL	Chaina	Chainage in m Length				
No	From	То	(m)	TCS Type	TCS DETAILS	
1	80675	80922	247	TCS-3A	Two Lane C/W withPS with one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (Reconstruction)	
2	80922	81297	375		Major Bridge	
3	81297	81866	569	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	
4	81866	81941	75		Major Bridge	
5	81941	82090	149	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	
6	82090	82200	110	TCS-4A	Two Lane C/W withPS with Both Side Cut & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)	
7	82200	82250	50	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	
8	82250	82560	310		Viaduct	
9	82560	82640	80	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	
10	82640	82720	80	TCS-4A	Two Lane C/W withPS with Both Side Cut & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)	
11	82720	82825	105	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)	
12	82825	83075	250		Major Bridge	
13	83075	83280	205	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net	

SL	Chaina	ge in m	Length	TCC Turno	TCS DETAILS
No	From	То	(m)	TCS Type	TCS DETAILS
					Slope Protection on Hill Side (New Construction)
14	83280	83320	40	TCS-4A	Two Lane C/W withPS with Both Side Cut & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)
15	83320	83940	620	Two Lane C/W withPS With one sid & one Side Fill & Protection as TCS-2A Applicable with Wire Mesh/Cable Slope Protection on Hill Side (Ne	
16	83940	83990	50	TCS-1	Two Lane C/W withPS with Both Side Fill & Protection as Applicable (New Construction)
17	83990	84300	310	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
18	84300	84370	70	TCS-4A	Two Lane C/W withPS with Both Side Cut & Protection as Applicable with Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)
19	84370	84780	410	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
20	84780	84880	100		Viaduct cum bridge
21	84880	85510	630	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
22	85510	85580	70	TCS-4A	Two Lane C/W withPS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)
23	85580	86078	498	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
24	86078	86093	15		Minor Bridge

SL	Chaina	ge in m	Length	TCC Turno	TCC DETAILS
No	From	То	(m)	TCS Type	TCS DETAILS
25	86093	86350	257	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
26	86350	86440	90		Major Bridge
27	86440	86570	130	TCS-2A	Two Lane C/W withPS With one side cut & one Side Fill & Protection as Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side (New Construction)
28	86570	86610	40	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill (New Construction)
29	86610	86792	182	Two Lane C/W With PS With one si cut & one Side Fill & Protection A: TCS-2A Applicable With Wire Mesh/Cable N Slope Protection on Hill Side(New Construction)	
30	86792	86817	25		Minor Bridge
31	86817	86973	156	Two Lane C/W With PS With one sid cut & one Side Fill & Protection As TCS-2A Applicable With Wire Mesh/Cable Ne Slope Protection on Hill Side(New Construction)	
32	86973	86998	25		Minor Bridge
33	86998	87855	857	Two Lane C/W With PS With one side cut & one Side Fill & Protection As TCS-2A Applicable With Wire Mesh/Cable N Slope Protection on Hill Side(New Construction)	
34	87855	87865	10		Minor Bridge
35	87865	88926	1061	Two Lane C/W With PS With one si cut & one Side Fill & Protection A TCS-2A Applicable With Wire Mesh/Cable I Slope Protection on Hill Side(Nev Construction)	
36	88926	89316	390		Major Bridge
37	89316	89330	14	Two Lane C/W With PS With Both Side TCS-1 Fill & Protection As Applicable (New Construction)	
38	89330	89690	360	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net

SL	Chaina	ge in m	Length	TCS Type	TCS DETAILS
No	From	То	(m)	тсэ туре	
				Slope Protection on Hill Side(Ne Construction)	
39	89690	89715	25		Minor Bridge
40	89715	89930	215	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
41	89930	89990	60	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction)
42	89990	90013	23	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
43	90013	90023	10		Minor Bridge
44	90023	90475	452	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
45	90475	90525	50		Minor Bridge
46	90525	90900	375	Two Lane C/W With PS With one so cut & one Side Fill & Protection of TCS-2A Applicable With Wire Mesh/Cable Slope Protection on Hill Side(Ne Construction)	
47	90900	90910	10		Minor Bridge
48	90910	90940	30	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
49	90940	90990	50	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction) Two Lane C/W With PS With one side
50	90990	91230	240	TCS-2A	cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)

SL	Chaina	ge in m	Length	TCS Tuno	TCS DETAILS
No	From	То	(m)	TCS Type	TCS DETAILS
51	91230	91270	40	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction)
52	91270	91340	70	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
53	91340	91390	50	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction) Two Lane C/W With PS With one side
54	91390	91750	360	TCS-2A	cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
55	91750	91810	60	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction)
56	91810	91835	25	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
57	91835	91845	10		Minor Bridge
58	91845	92020	175	Two Lane C/W With PS With one side cut & one Side Fill & Protection As TCS-2A Applicable With Wire Mesh/Cable N Slope Protection on Hill Side(New Construction)	
59	92020	92080	60	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction)
60	92080	92480	400	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
61	92480	92520	40	TCS-4A	Two Lane C/W With PS With Both Side Cut & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on One Side of Hill(New Construction)

SL	Chaina	ge in m	Length	TCS Turas	TCS DETAILS
No	From	То	(m)	TCS Type	TCS DETAILS
62	92520	93910	1390	TCS-2A	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable With Wire Mesh/Cable Net Slope Protection on Hill Side(New Construction)
63	93910	94000	90	TCS-1	Two Lane C/W With PS With Both Side Fill & Protection As Applicable (New Construction)
64	94000	94050	50	TCS-2	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable (New Construction)
65	94050	94060	10		Minor Bridge
66	94060	94160	100	TCS-2	Two Lane C/W With PS With one side cut & one Side Fill & Protection As Applicable (New Construction)
67	94160	94260	100	TCS-1	Two Lane C/W With PS With Both Side Fill & Protection As Applicable (New Construction)
68	94260	94470	210	Two Lane C/W With PS With Both Side TCS-4 Cut & Protection As Applicable (New Construction)	
69	94470	95290	820	Two Lane C/W With PS With one side TCS-2 cut & one Side Fill & Protection As Applicable (New Construction)	
70	95290	95480	190	Two Lane C/W With PS With one side cut & one Side Fill & Protection As TCS-3A Applicable with Wire Mesh/Cable Not Slope Protection on Hill Side(Reconstruction)	
71	95480	95550	70	Two Lane C/W With PS With one side TCS-3 cut & one Side Fill & Protection As Applicable (Reconstruction)	
Total Length (in m)		14875			


<u>Link Road Chainages From 0+000 to 1+871 Total Length = 1+871Km</u>

SL	Chaina	ge in m	Length	TCS Type	TCS DETAILS	
No	From	То	(m)	TCS Type		
1	0.000	5.000	5	Two Lane C/W With Both Side Fill TCS-A Protection As Applicable (New Construction)		
2	5.000	275.000	270	Major Bridge		

SL	Chaina	ge in m	Length	TCC Turns	TCS DETAILS
No	From	То	(m)	TCS Type	ICS DETAILS
					Two Lane C/W With Both Side Fill &
3	275.000	300.000	25	TCS-A	Protection As Applicable (New
					Construction)
					Two Lane C/W with Both Side Cut &
4	300.000	360.000	60	TCS-C	Protection As Applicable (New
					Construction)
					Two Lane C/W With one side cut &
5	360.000	440.000	80	TCS-B	one Side Fill & Protection as
					Applicable (New Construction)
					Two Lane C/W with Both Side Cut &
6	440.000	480.000	40	TCS-C	Protection as Applicable (New
					Construction)
					Two Lane C/W With one side cut &
7	480.000	1400.000	920	TCS-B	one Side Fill & Protection as
					Applicable (New Construction)
					Two Lane C/W with Both Side Fill &
8	1400.000	1460.000	60	TCS-A	Protection as Applicable (New
					Construction)
					Two Lane C/W With one side cut &
9	1460.000	1871.041	411.041	TCS-B	one Side Fill & Protection as
					Applicable (New Construction)
Total	Total Length (in m)		1871		

Note: Utility duct shall be laid with 300mm dia. HDPE pipe all along the project length as per applicable TCS and cross sectional in accordance with IS: 4984/14333 or any other relevant code with inspection chambers at acceptable interval as approved by Authority Engineer/ Employer.


Typical Cross Section -Annex-II

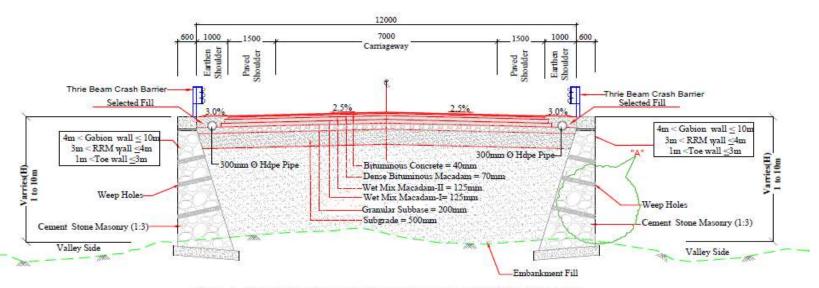

Type - 1 - Typical Cross-Section For Two Lane Carriageway With Paved Shoulder


In Mountainous Terrain With Both Side Fill & Protection As Applicable .


(New Construction)





NOTE:-


- 1.All Dimension are in millimeters except otherwise specified
- 2.Extra widening will be provided where radius of horizontal curve is less than 300m.
- 3. Toe wall Shall be provided where height of embankment is less than 3 m. & greater than 1 m.
- 4.Retaining wall Shall be provided where height of embankment is greater than 3m. & less than 4m

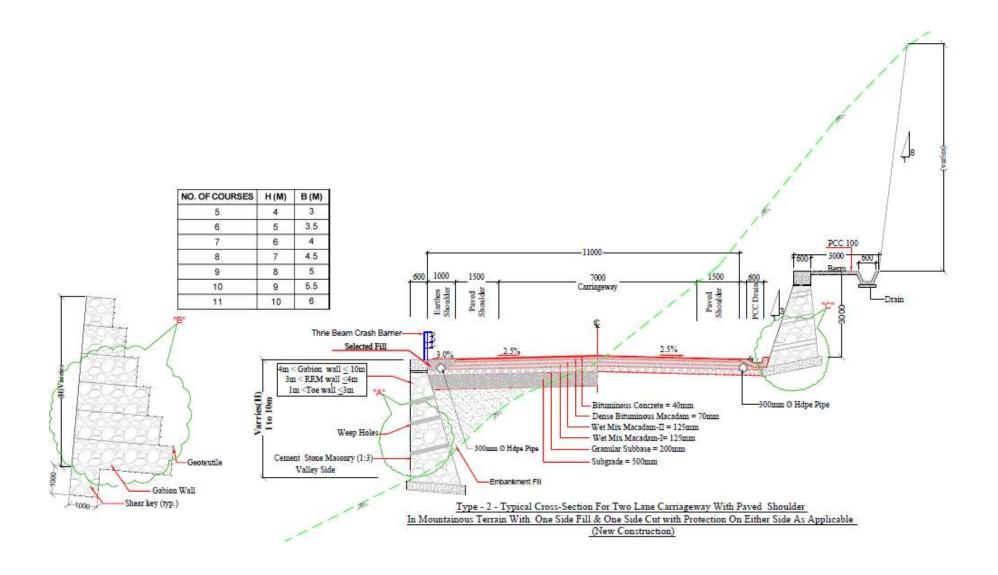

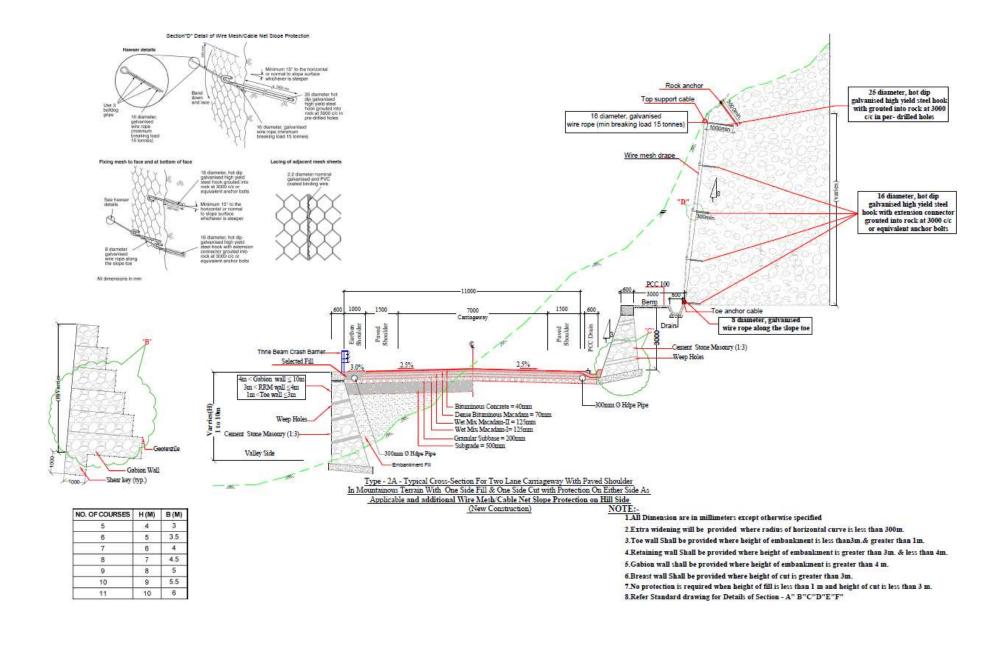

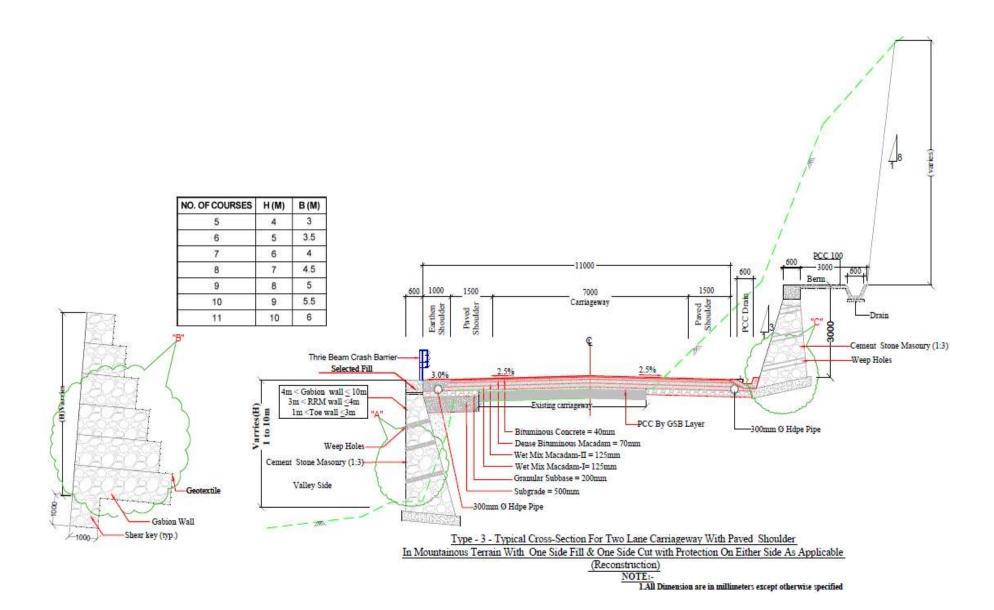

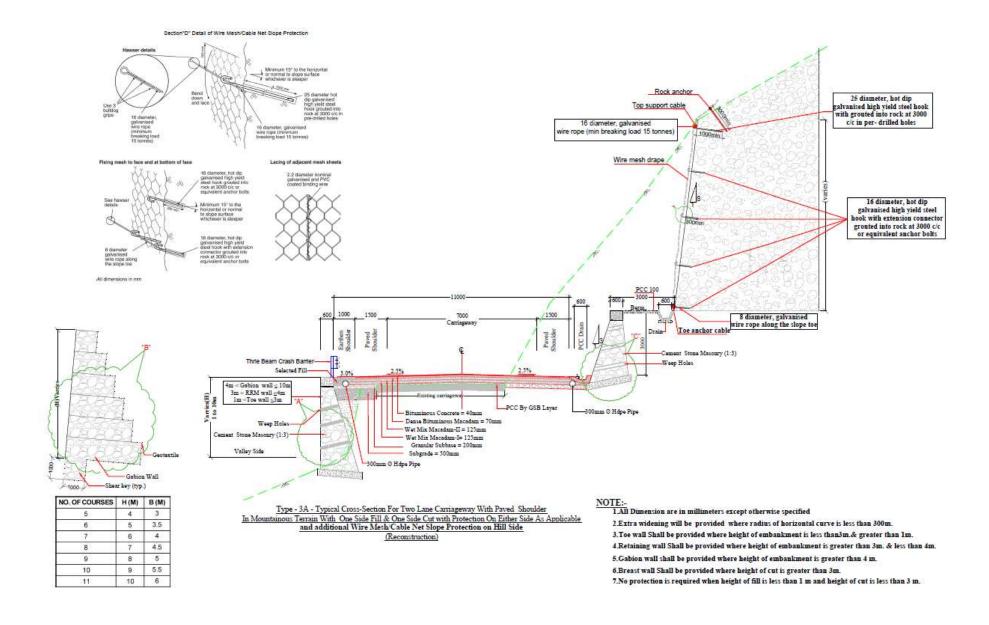

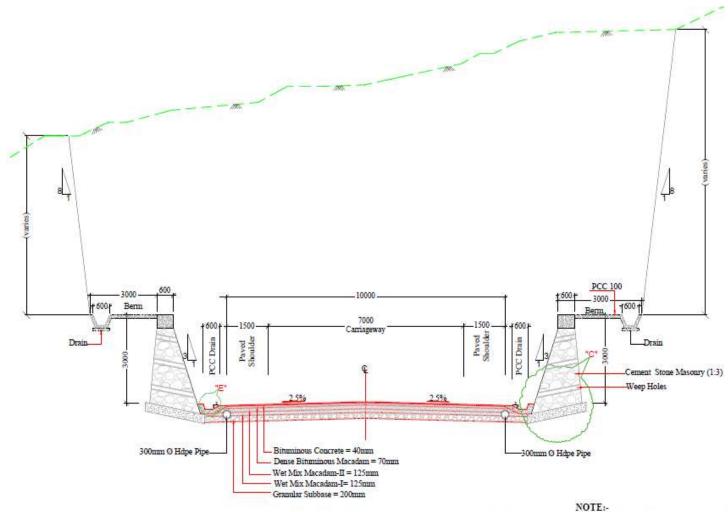


Type - 4- Typical Cross-Section For Two Lane Carriageway With Paved Shoulder

In Mountainous Terrain With Both Side Cut With Protection On Either Side As Applicable


2. Extra widening will be provided where radius of horizontal curve is less than 300m. (New Construction)

1.All Dimension are in millimeters except otherwise specified

3. Toe wall Shall be provided where height of embankment is less than 3m. & greater than 1m.

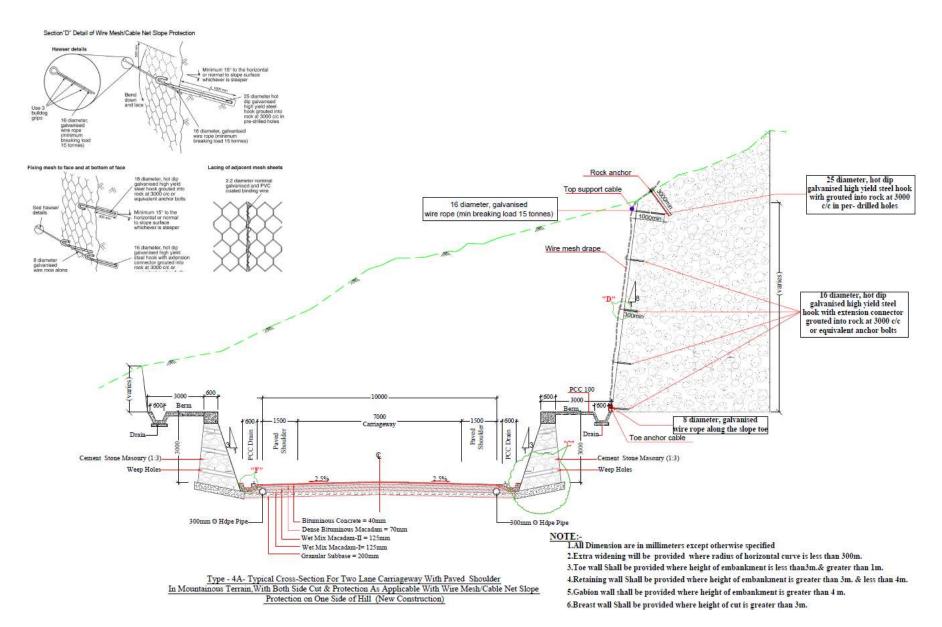



Link Road Typical Cross Section

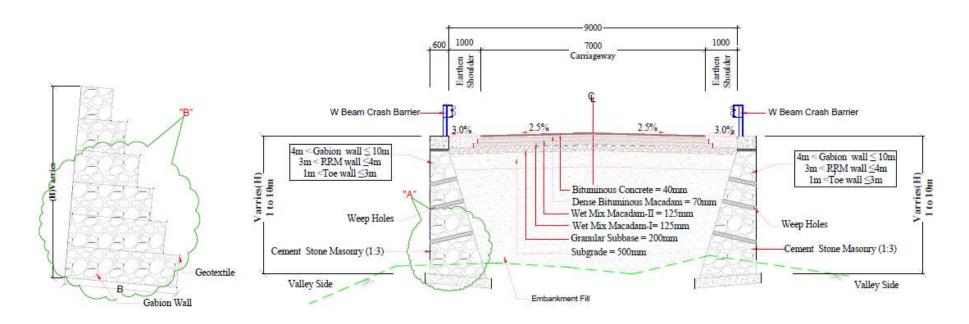

NO. OF COURSES	H (M)	B (M)
5	4	3
6	5	3.5
7	6	4
8	7	4.5
9	8	5
10	9	5.5
11	10	6

 $\frac{\text{Type - A - Typical Cross-Section For Two Lane Carriageway}}{\text{In Mountainous Terrain With Both Side Fill \& Protection As Applicable}}. \\ \frac{\text{(New Construction)}}{\text{(New Construction)}}$

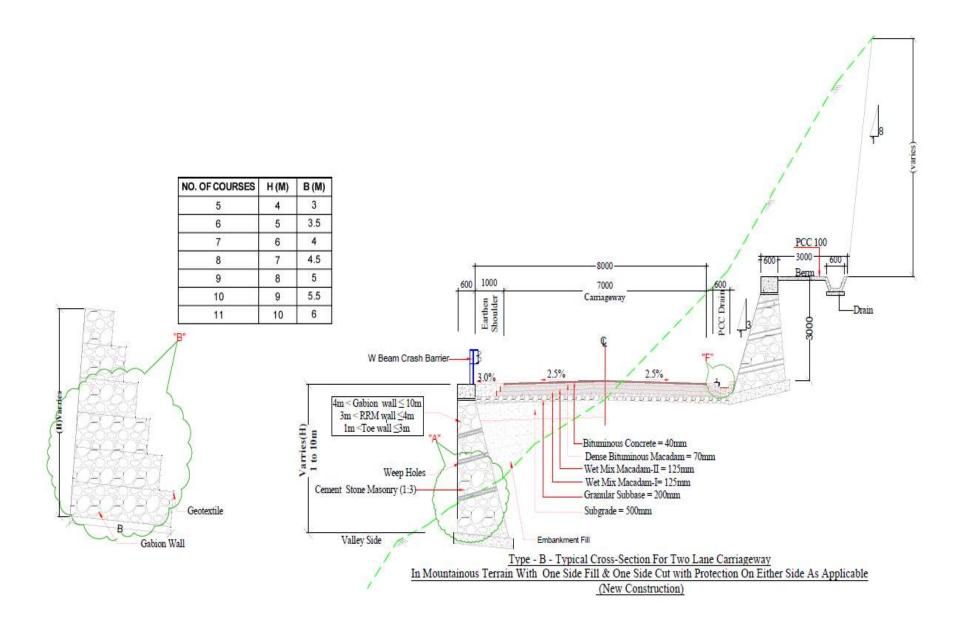

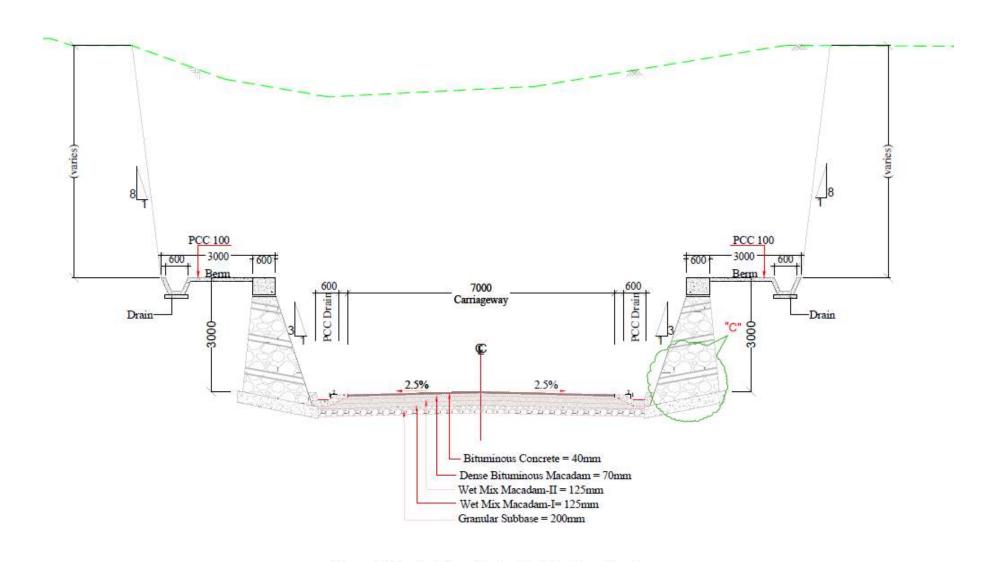

Type - C- Typical Cross-Section For Two Lane Carriageway

In Mountainous Terrain With Both Side Cut With Protection On Either Side As Applicable

(New Construction)

Annex – III

(Schedule-B)

Tender Drawings

Schedule B-1

The shifting of utilities and felling of trees shall be carried out by the contractor. The cost of the same shall be borne by the Authority. The details of utilities are as follows:

Sl. No.	Type of Utility	Unit	Quantity	Location/stretch (LHS/RHS)
A	Electrical Utilities			
A1	Electrical poles HT & LT Line	Nos.	37	22 nos. Single /15nos.Double
A2	Electrical cables	Meters	1560	
A3	Transformers	Nos.	3	
В	OFC	No.	-	
C	Felling of Trees	Nos.	1488	
D	PHE Pipeline	Meters	450	

Schedule - C

(See Clause 2.1)

Project Facilities

1. ProjectFacilities

The Contractor shall construct the Project Facilities in accordance with the provisions of this Agreement. Such Project Facilities shall include:

- (a) tollplaza[s];
- (b) roadside furniture;
- (c) pedestrian facilities;
- (d) tree plantation;
- (e) truck lay-byes;
- (f) bus-bays/ bus shelters/ bus stop;
- (g) rest areas
- (h) rainwater harvesting; and
- (i) others to be specified

2. Description of ProjectFacilities

Each of the Project Facilities is described below:

- (a) Rainwater Harvesting: nIL
- (b) Bus Stops: In order to promote the use of public transport and facilitate the travel for passengers 05 nos. of bus stops have been proposed locations along the project road.

BUS STOP					
	Design Chainage in Km				
S.NO	LHS	RHS			
1	080+780	080+780			
2	-	091+980			
3	093+780	-			
4	-	094+830			

(c) High Mast Lighting & Electric Pole:

Provision of Electric Pole (Street Lighting) as per specification or as per the instruction of the Authority:

Schedule - D

(See Clause 2.1)

Specifications and Standards

1. Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex- I of this Schedule-D for construction of the Project Highway.

2. Design Standards

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

Annex – I

(Schedule-D)

Specifications and Standards for Construction

1. Specifications and Standards

All Materials works and construction operations shall conform to the Manual of Specifications and Standards for Two-Laning of Highways IRC: SP:73-2018, Hill Road Manual (IRC:SP: 48-1998)Guidelines referred to as the Manual, and MORTH Specifications for Road and Bridge Works. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

2. Deviations from the Specifications and Standards

- (i) The terms "Concessionaire", "Independent Engineer" and "Concession Agreement" used in the Manual shall be deemed to be substituted by the terms "Contractor", "Authority's Engineer" and "Agreement" respectively.
- (ii) Notwithstanding anything to the contrary contained in Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, the aforesaid Specifications and Standards shall be deemed to be amended to the extent set forthbelow:

Sr. No.	Item	Clause referred in Manual	Provision as per Manual	Modified Provision
1	Typical Cross section	2.16		These clauses are deemed to be amended as shown in the
2	Typical Cross Section	2.6.1, 2.7 and 2.16		typical cross section (refer Schedule B).
3	Radii of Horizontal Curves	2.9.4	Mountainous and steep terrain, desirable minimum radii and absolute minimum shall be 150 m and 75 m, respectively.	Mountainous and steep terrain, desirable minimum radii and absolute minimum shall be 150 m and 75 m, respectively except at the location given in alignment drawing (refer Annex-III, schedule A).
4	Width of New Bridge	7.3		To be amended as shown in the typical Cross section (refer Schedule B)
5	Utility Duct	2.15	Utility Duct with 600mmm dia	Utility duct shall be laid in accordance with IS: 4984/14333 or any other relevant code with inspection chambers at acceptable interval as approved by Authority Engineer/ Employer

ATTACHMENT-DI TECHNICAL SPECIFICATIONS FOR ROAD & BRIDGE

Table of Contents

- 1.1 Site Information General
- 1.1.4 Seismic Zone
- **2 GENERAL REQUIREMENTS**
- 2.1 Part-I: General Technical Specifications
- 2.2 Part-II: Supplementary Technical Specifications
- 2.3 PART-III Specifications for Miscellaneous Works

CLAUSE 102 DEFINITIONS

CLAUSE 106 CONSTRUCTION EQUIPMENT

CLAUSE 108 SITE INFORMATION

CLAUSE 109 SETTING OUT

CLAUSE 111 PRECAUTIONS FOR SAFEGUARDING THE ENVIRONMENT

Sub-Clause 111.1 General

Sub-Clause 111.2 Borrow Pits for Embankment Construction

Sub-Clause 111.3 Quarry Operations

Sub-Clause 111.5 Pollution from Hot-Mix Plant and Batching Plants

Sub-Clause 111.8.2 Air Quality

Sub-Clause 111.8.3 Water Sources and Water Quality

Sub-Clause 111.20 Control and Disposal of Wastes

Sub-Clause 111.14 Equipment and Vehicles used for the Works

Sub-Clause 111.15 Noise Control

Sub-Clause 111.16 Vibration Control

Sub-Clause 111.17 Measurement

CLAUSE 112 ARRANGEMENT FOR TRAFFIC DURING CONSTRUCTION

Sub-Clause 112.6 Measurement for Payment and Rates

CLAUSE 114 SCOPE OF RATES FOR DIFFERENT ITEMS OF WORK

CLAUSE 115 METHODOLOGY AND SEQUENCE OF WORK

Sub-Clause115.1 Submission of Method Statement

Sub-Clause115.2 Approval of Proprietary Product/Process/System

CLAUSE 120 FIELD LABORATORY

Sub-Clause 120.3 Ownership

Sub-Clause 120.4 Maintenance

Sub-Clause 120.5 Rate

SECTION 200 Site Clearance

CLAUSE 201 CLEARING AND GRUBBING

CLAUSE 202 DISMANTLING CULVERTS, BRIDGES AND OTHER STRUCTURES/ PAVEMENTS

SECTION 300 Earthwork, Erosion Control and Drainage

CLAUSE 301 EXCAVATION FOR ROADWAY AND DRAINS

CLAUSE 304 EXCAVATION FOR STRUCTURES

CLAUSE 305 EMBANKMENT CONSTRUCTION

Sub-Clause 305.2.2.2 Borrow Materials

Sub-Clause 305.2.2.4 Compaction Requirements

Sub-Clause 305.3 Construction Operations

Sub-Clause 305.8 Measurement for Payment

CLAUSE 306 SOIL EROSION AND SEDIMENTATION CONTROL

SECTION 400 Sub-Bases, Bases (Non-Bituminous) and Shoulders

CLAUSE 401 GRANULAR SUB-BASE

Sub-Clause 401.2.2 Physical Requirements

CLAUSE 406 WET MIX MACADAM SUB -BASE/BASE

Sub-Clause 406.4 Opening to Traffic

SECTION 500 Base and Surface Courses (Bituminous)

Sub-Clause 501.2 Materials

Sub clause 501.2.1 Binder

Binder of VG-30 grade shall be used or if available viscosity grade of bitumen shall be used in accordance with IS: 73

CLAUSE 505 DENSE BITUMINOUS MACADAM

CLAUSE 507 BITUMINOUS CONCRETE

Binder of CRMB-60 grade shall be used.

SECTION 800 Traffic Signs, Markings and Other Road Appurtenances

CLAUSE 803 ROAD MARKINGS

CLAUSE 806 ROAD DELINATORS

TECHNICAL SPECIFICATIONS

1 The Technical Specifications contained herein shall be read in conjunction with the other Bidding Documents as specified in Volume-IX.

1.1 Site Information General

1.1.1 The information given hereunder and provided elsewhere in these documents is given in good faith by the Employer, but the Contractor shall satisfy himself regarding all aspects of site conditions and no claim will be entertained on the plea that the information supplied by the Employer is erroneous or insufficient.

The area in which the works are located is in hilly/mountainous terrain, the project road starts from 33° 8'50"N, 75° 31'46" E and ends at 33° 9'14.01"N, 75°40'55.49"E in the state of Jammu & Kashmir.

1.1.2 ClimaticConditions

- 1.1.2.1 The temperature in this region is as under:
 - During summer months, the average maximum temperature recorded is 30°C
 - ii) During winter months, the minimum average temperature is -2°C.
 - iii) The location receives about 920 mm of average annual rainfall, with March being the wettest month.

1.1.3 Seismic Zone

The stretch lies in Seismic Zone-IV as defined in Fig. 18 of IRC: 6-2017.

2 GENERAL REQUIREMENTS

The Technical Specifications in accordance with which the entire work described hereinafter shall be constructed and completed by the Contractor shall comprise of the following:

2.1 Part-I: General Technical Specifications

The General Technical Specifications shall be the "SPECIFICATIONS FOR ROAD AND BRIDGE WORKS" (Fifth Revision, April 2013), issued by the Ministry of Road Transport and Highways, Government of India and published by the Indian Roads Congress, henceforth called MORT&H Specifications and deemed to be bound into this document.

2.2 Part-II: Supplementary Technical Specifications

The Supplementary Technical Specifications shall comprise of various Amendments/Modifications/ Additions to the "SPECIFICATIONS FOR ROAD AND BRIDGE WORKS" referred to in Part-I above and Additional Specifications for item of works which are not covered in Part-I.

- A clause or a part thereof in "SPECIFICATIONS FOR ROAD AND BRIDGE WORKS (Fifth Revision April 2013",), referred in Part-I above, where Amended/Modified/Added upon, and incorporated in Part-II, referred to above, such Amendment/Modification/ Addition supersedes the relevant Clause or part of the Clause.
- 2.3.1 The Additional Specifications shall comprise of specifications for item of works which not covered in Part-I.
- 2.3.2 When an Amended/Modified/Added Clause supersedes a Clause or part thereof in the said Specifications, then any reference to the superseded Clause shall be deemed to refer to the Amended/Modified/Added Clause or partthereof.

- 2.3.3 In so far as Amended/Modified/Added Clause may come in conflict or be inconsistent with any of the provisions of the said MORT&H Specifications under reference; the Amended/Modified/Added Clause shall alwaysprevail.
- 2.3.4 The following Clauses in the "SPECIFICATIONS FOR ROAD AND BRIDGE WORKS (Fifth Revision April 2013",) have been Amended/Modified/Added upon

Sr. No.	Section No.	Section Title	Clause No.
1.	100	General	102,106,108,109, 111,112,114,115 and 121
2.	200	Site Clearance	201 and 202
3.	300	Earthwork, Erosion Control and Drainage	301,304,305 and 306
4.	400	Sub-base, Bases (Non- Bituminous) and Shoulders	401and 406
4.	500	Bases and Surface Courses (Bituminous)	501,505 and 507
5.	800	Traffic signs, Markingsand other RoadAppurtenances	803,806 and 811
6.	2100	Open Foundations	2104

2.4 PART-III Specifications for Miscellaneous Works

Technical Specifications for Miscellaneous works shall be the latest "Specifications volume I to VI, 1996 for Civil Works and General Specifications for Electrical Works PART I – INTERNAL, PART – II, EXTERNAL for electric work 1994 as published by the Central Public Works Department (CPWD), Government of India" and deemed to be bound into this document.

2.5 The latest edition till60 days before the final date of submission of the bid of all specifications / standard shall beapplicable.

SCOPE OF WORKS

Road Works

Site clearance; setting-out and layout; widening of existing carriageway and strengthening including camber corrections; construction of new road/ parallel service road; bituminous pavements remodelling/construction of junctions, intersections, bus bays, lay byes; supplying and placing of drainage channels, flumes, guard posts, guard rails and other related items; construction/extension of cross drainage works, bridges, approaches and other related works; road markings, road signs and kilometer/ hectometrestones; protective works for roads/ bridges; all aspects of quality assurance of various components of works; rectification of the defects in the completed works during the Defect Liability Period; submission of "As built" drawings and any other related documents; and other items of work as may be required to be carried out for completing the works inaccordancewiththedrawingsandprovisionsof theContracttoinsuresafety.

Other Items

Execution of any other items of work for the construction and completion of the Works in accordance with the provisions of the Contract including all incidental items as well as preparation and submittal of reports, plans as may be required.

During the period of the Contract the right of way and all existing roads shall be kept open for traffic and maintained in a safe and usable condition. Residents along and adjacent to the works are always to be provided with safe and convenient access to their properties. Traffic control and traffic diversions shall be used as necessary to protect the works and maintenance will be carried out as directed by the Engineer and provided in the Contract.

Any other items as required to fulfil all contractual obligations as per the Bid Documents.

PART II

SUPPLEMENTARY TECHNICAL SPECIFICATION

AMENDMENTS/MODIFICATIONS/ADDITIONS TO EXISTING CLAUSES OF GENERAL TECHNICAL SPECIFICATIONS

SECTION100 General

CLAUSE 102 DEFINITIONS

The following abbreviations shall be added in this Clause: "MORT&H"

Ministry of Road Transport & Highways

(Previously known as 'MOST', Ministry of Surface Transport)

"NHAI" : National Highways Authority ofIndia

CLAUSE 106 CONSTRUCTION EQUIPMENT

Add the following sub para (g) and (h) after sub para (f)

Adequate standby equipment including spare parts shall beavailable.

All measuring devices and gauges shall be in good working condition.
 Measuring devices that can affect product quality shall be calibrated prior
 to use and at prescribed intervals against certified equipment. Calibration
 procedures shall be established, maintained and documented and
 corrective actions taken when results are unsatisfactory. Accuracy and
 fitness of measuring devices shall be ensured by propermaintenance.

CLAUSE 108 SITE INFORMATION

Sub-Clause 108.4 This clause shall be as follows:

"Identification of quarry sites and borrow areas shall be the responsibility of the Contractor. Materials procured from quarry sites and borrow areas identified by Contractor and to be used in Works must comply with the requirements of quality as stipulated in the Technical Specification for particular items of work."

CLAUSE 109 SETTING OUT

Sub-Clause 109.8 Delete the 2nd and 3rd sentences in Clause 109.8 and substitute the following:

"Setting out of the road alignment and measurement of angles shall be done

by using Total Station."

CLAUSE 111 PRECAUTIONS FOR SAFEGUARDING THE ENVIRONMENT

Sub-Clause 111.1 General

Delete the text of Clause 111.1 in its entirety and substitute the following:

"The Contractor shall take all necessary measures and precautions and otherwise ensure that the execution of the Works and all associated operations on site or off-site are carried out in conformity with statutory and regulatory requirements including those prescribed elsewhere in this document.

The Contractor shall take all measures and precautions to avoid any nuisance or disturbance arising for the execution of the Works. This shall wherever possible be achieved by suppression of the nuisance at source rather than abatement of the nuisance once generated. All vehicles deployed for material haulage shall be spillageproof.

Haul roads shall be inspected at least once daily to clear any accidental spillage. In the event of any spoil, debris, wastes or any deleterious substance from the Site being deposited on any adjacent land, the Contractor shall immediately remove all such material at no cost to the Contract and restore the affected area to its original state to the satisfaction of the Engineer."

Sub-Clause 111.2 Borrow Pits for Embankment Construction

Delete the text of Clause 111.2 and substitute the following:

"Prior approval shall be sought from the concerned State Authorities, and the Contractor shall comply with all local environmental regulations. For all borrow areas, the actual extent of area/zones to be excavated shall be demarcated with the signboards and the operational areas shall be access controlled.

In the case of borrow from tank beds, a regrade/improvement of the inlet channels (at least up to 100m stretch) shall be undertaken in consultation with the concerned state government departments (the Minor Irrigation department of the State PWD) and local bodies. The Contractor shall ensure that excavation of tank beds is uniform over the entire area and that the finished profile of the bed issmooth.

In the case of borrow from the dry highlands, all borrow areas shall be reinstated by the formation gentle side slopes, re-vegetated and connected to the nearest drainage channel to avoid the formation of pools during/after the rainy seasons.

Plant and machinery used in the borrow areas shall conform to State noise emission regulations. All operation areas shall be water sprinkled to contain dust levels to the National Ambient Air Quality Standards."

Sub-Clause 111.3 Quarry Operations

Delete the text of Clause 111.3 and substitute the following:

"Aggregates shall be sourced only from quarry sites that comply with the local/state environmental and other applicable regulations. Occupational safety procedures/practices for the work force in all quarries shall be in accordance with applicable laws. Quarry and crushing units shall have adequate dust suppression measures, such as sprinklers, in work areas and along all approach roads to the quarry sites. These shall preferable be located on the upwind side."

Sub-Clause 111.5 Pollution from Hot-Mix Plant and Batching Plants

Delete the 1st sentence of Clause 111.5 and substitute the following:

"Bituminous hot mix plant and concrete batching plants shall be located at least one(1)km awayfrom thesensitivereceptors(schools,hospitals,etc.)andatleast 500m from urban settlements, unless otherwise required by the statutory requirements."

Sub-Clause 111.8.1 Environmental Protection:

Add the following sentences in the first paragraph of Sub Clause 111.8.1:

Water tankers with suitable sprinkling system shall be deployed along the

haulage roads and in the work sites. Water shall be sprinkled regularly all along the routes to suppress airborne dusts from truck/dumper movements particularly on unpaved roads. Actual frequency will be agreed with the Engineer to suit site conditions."

Sub-Clause 111.8.2 Air Quality

The Contractor shall device and implement methods of working to minimize dust, gaseous and other air-borne emissions and carry out the Works in such a manner as to minimize adverse impacts on the air quality. Construction camps shall have facilities for LPG fuel. The use of firewood shall not be permitted.

The Contractor shall utilize effective water sprays during delivery, manufacture, processing and handling of materials when dust is likely to be created, and to dampen stored materials during dry and windy weather. Stockpiles of friable materials shall be covered with clean tarpaulins, with applications of sprayedwater during dry and windy weather. Stockpiles of materials or debris shall be dampened prior to their movement, except where this is contrary to the Specification.

Any vehicle with an open load-carrying area used for transporting potentially dust- producing material shall have properly fitting side and tail boards. Materials having the potential to produce dust shall not be loaded to a level higher than the side and tail boards and shall be covered with clean tarpaulins in good condition. The tarpaulin shall be properly secured and extend at least 300mm over the edges of the side of the side and tailboards.

The Contractor shall monitor air-quality once weekly in all operational areas under the project and take the necessary steps to comply with the specified requirements. Air quality parameters will include SPM, RPM, SO₂, NO_x, HC and CO. operational areas include work sites, haulage roads, hot mix plants, quarries, crushing plants, stockpiles, borrow sites and spoil disposal sites.

Sub-Clause 111.8.3 Water Sources and Water Quality

The Contractor shall provide independent sources of water supply, such as bore wells, for use in the Works and for associated storage, workshop and work force compounds. Prior approval shall be obtained from the relevant State Authorities and all installations shall follow local regulations. Bore wells installed and used for the project shall be left in good operating condition for the use of NHAI and local communities. The Contractor shall prevent any interference with the supply to or abstraction from and prevent any pollution of

resources (including under ground percolating water) as a result of the execution of the Works.

Areas where water is regularly or repetitively used for dust suppression purposes shall be laid to fall to specially constructed settlement tanks to permit sedimentation of particulate matter. After settlement, the water may be re-used for dust suppression and rinsing. The Contractor shall protect all watercourses, waterways, ditches, canals, drains, lakes and the likes from pollution as a result of the execution of the Works.

All water and other liquid waste products arising on the Site shall be collected and disposed of at a location on or off the Site and in a manner that shall not

cause either nuisance orpollution.

The Contractor shall at all times ensure that all existing stream courses and drains within, and adjacent to, the Site are kept safe and free from any debris and any materials arising from the Works. The Contractor shall not discharge or deposit any matter arising from the execution of the Works into any water except with the permission of the Engineer and the regulatory authority concerned.

Work force camps shall have septic tank and soak away pits. Operational areas like POL storage areas/hot mix plant areas shall comply with local/state environmental regulations and safety procedures. Storage and handling areas shall be impervious and surrounded by an impervious lined drain to catch any accidental spills. Storm water shall be stored in lined holding tanks with oil, grease-tapping facility prior to disposal in to nearby watercourses. The trappings and sludge of holding tanks shall be disposed off in accordance with the procedures approved by the local regulatory authority.

Sub-Clause 111.20 Control and Disposal of Wastes

The Contractor shall control the disposal of all forms of waste generated by the construction operations and in all associated activities. No uncontrolled deposition or dumping shall be permitted. Wastes to be so controlled shall include, but shall not be limited to, all forms of fuels and engine oils, all types of bitumen, cement, and surplusaggregates, gravels, bituminous mixtures etc. The Contractor shall make specific provision for the proper disposal of these and any other waste products, conforming to local regulations and acceptable to the Engineer.

Spilling of oil and bituminous products during construction and transport shall be avoided to reduce the chances of contamination of surface as well as ground water.

Degraded materials shall be disposed of in a manner as approved by the Engineer and wastewater shall be disposed into septic tanks and soak pits etc. The Contractor shall make arrangements to clean-up spoil as soon as the work finishes in a stretch. If such sites are located outside the ROW, restoration of the site to a level acceptable to the land owner(s) will be carried out within a time period agreed between landowner(s) and the Contractor. Separators shall be used to separate POL materials from wastewater prior to discharging to the watercourses or as approved by the Engineer in conformance with directives andguidelines.

Disposal of solid waste materials shall be outlined in a plan for which environmental clearances shall be obtained from State environmental regulatory authorities. Potential locations for solid waste disposal are the natural depressions and borrow areas. The areas used for dumping of uncontaminated debris shall be covered with 300mm soil and shall be planted. Contaminated debris shall be dumped in depressions whose bed must be impervious e.g., stone quarry sites or depressions made impervious with 450mm thick impervious floor apron as per

MORT&HTechnicalSpecifications. Each successive 1.0 mlayers shall be covered with 500 mm thick soil layer, and the area will be covered with 300 mm thick layer and planted.

After Clause 111.12 add the following new Clauses 111.13 to 111.17

Sub-Clause 111.13 Haulage Roads

Existing roads used for hauling shall be strengthened and/ or widened by the Contractor in accordance with the requirements for normal and construction traffic.

Where such roads are not existing, the Contactor shall construct project specific single lane paved roads in settlement areas and gravel roads in open areas conforming to the Ministry of Road Transport and Highways (MORT&H) specifications.

The alignment of the haulage roads shall be fixed to avoid agricultural land to the extent possible. In unavoidable circumstances, suitable compensation shall be paid to the people whose land will be temporarily acquired for the duration of the operations. The compensation shall cover for loss of income for the duration of temporary acquisition and land restoration. Prior to the construction of the haul roads, topsoil shall be stripped and stockpiled for reuse.

Material dumping sites shall be access controlled to prevent the unauthorized entry of the people, grazing cattle and stray animals.

Haulage roads shall be reinstated upon completion of hauling for the use of local communities."

Sub-Clause 111.14 Equipment and Vehicles used for the Works

Equipments and vehicles deployed for the construction activities shall not be older than 5 years. Equipments used for road and bridge works shall be based on new technology and shall generate noise and pollutants not exceeding the limits specified by the relevant State Authorities. Vehicles and machineries used for road and bridge works are to be regularly maintained to conform to the National Air Quality Standards. Blasting, if any, will be carried out using smallcharges.

Sub-Clause 111.15 Noise Control

The Contractor shall consider noise as an environmental constrain in the planning and execution of the Works.

The Contractor shall take all necessary measures so that the operation of all mechanical equipment and construction processes on and off the site shall not cause any unnecessary or excessive noise, taking in to account applicable environmental requirements. The Contractor shall use all necessary measures and shall maintains all plant and silencing equipment in good conditions so as to minimize the noise emission during constructionworks.

Any member of the work force likely to be exposed to beyond their thresholdnoise levels shall be provided with protective equipment, such as earplugs, and shall be rotated every fourhours.

Construction operations shall be limited to daytime hours only, particularly in

the settlement areas.

Sub-Clause 111.16 Vibration Control

The Contractor shall take measures during construction activities to control the movement of the work force and construction machinery/equipment, and to avoid/ minimize activities, which produce vibrations.

Sub-Clause 111.17 Measurement

Monitoring of Air/Water/Noise and Soil quality shall be paid as per numbers of samples tested. For Compliance of all other provisions made in this Clause 111, it shall be

deemed to be incidental to the work and no separate measurements hall be made.

The Contractor shall be deemed to have made allowance for such compliance with these provisions in the preparations of his prices for items of work included in the Bills of Quantities and full compensation for such compliance shall be deemed to be covered bythem."

CLAUSE 112 ARRANGEMENT FOR TRAFFIC DURING CONSTRUCTION

Sub-Clause 112.4 Traffic Safety and Control

Last line of Para 5 shall be read as under:

"The signs shall be of approved design and of reflector type." **Add the following paragraph at the end of the clause:**

"Before commencement of any construction, the Contractor shall prepare and submit details of the arrangements for passing traffic during construction, design of barricades, signs, markings, lights, flags etc. conforming and satisfying the requirements of the "Guidelines on Safety in Road Construction Zones" of IRC: SP 55-2001 and get the same approved by the Engineer.

Sub-Clause 112.6 Measurement for Payment and Rates

- a) The provision of treated shoulder including construction of temporary cross drainage structures, if required, as described in Clause 112.2 including their maintenance, dismantling and clearing debris, where necessary, shall be considered as incidental to the works and shall be Contractor'sresponsibility.
- b) The Construction of temporary diversion including temporary cross drainage structures asdescribedinsubclause112.3, shall be measured in linear meterand the unit contract rate shall be inclusive of full compensation for construction (including supply of material, labor, tools, etc.), maintenance as per sub clause 112.5, final dismantling, and disposal.
- c) All Traffic safety and control devices during construction as per sub clause 112.4including providing, erecting and maintaining barrier, signs, markings, flags, lights and providing flag men etc. is included in item rate.

CLAUSE 114 SCOPE OF RATES FOR DIFFERENT ITEMS OF WORK

Sub-Clause 114.2 Item (ii) of Clause 114.2 shall read as follows:

A detailed resource-based construction programme including resources planning using computerized critical path network method/PERT in a form, which facilitates control of the progress of the works and consequences of any

changes in terms of time. The programme shall also include detailed network, activities for the submission and approval of materials, procurement of critical materials and equipment, fabrication of special products/ equipment and their installation and testing and for all activities of the Contractor that are likely to affect the progress of work etc. including updating all such activities on the basis of decisions taken at the periodic site review meetings or as directed by the Engineer. The Contractor shall submit data via electronic media to the Engineer in a form readily compatible with Engineer's planningsystem.

The first issue of the detailed construction programme including the detailed description of the system and the procedures shall be submitted to the Engineerfor acceptance not later than 28 days after the date of receipt of the letter of acceptance.

The contractor shall submit to the Engineer for approval & consent, the updated & revised programme at every three months interval or as such as directed by the Engineer. The updated & revised programme shall be submitted showing the actual progress achieved (physical & financial) and the effects of the progress achieved on the timing of the remaining work including any change to the sequence of the activities

CLAUSE 115 METHODOLOGY AND SEQUENCE OF WORK

The Clause shall be substituted as follows:

Sub-Clause115.1 Submission of Method Statement

The Contractor shall submit methods statement within 28 days after the date of letter of acceptance. The methods statement shall be submitted in two parts.

The General part of the methods statement shall describe the Contractor's proposals regarding preliminary works, common facilities, and items that require consideration at the early stage of the Contract. The General part shall be furnished along with the first issue of the construction programme (refer clause 114.2) and shall include information on:

- Sources of materials like coarse aggregate and fine aggregate, quantity and quality of materials available in differentsources;
- b) Sources of manufactured materials like cement, steel, bitumen reinforcement, prestressing strands and bearings. Wherever possible the Contractor shall identify at least two sources for each of the items; he shall also submit test certificates of recently manufactured materials for the consideration of the Engineer.
- c) Locations of site facilities like batching plant, hot mix plant, aggregate processing plant, crushing plantetc.
- d) Details of facilities/approaches for transportation of men, equipment and materials for construction of pavements, foundations and substructure in riverbed, and plan for free traffic flow and safedrainage.
- e) Information on procedures to be adopted by the Contractorfor prevention and mitigation of negative environmental impact due to constructionactivities.
- f) Any other information required by the Engineer subsequent to the

scrutiny of methodstatement

The General part of the Q.A. Programme shall accompany the methodsstatement under sub-clause 105.3.

The Special part of the methods statement shall be submitted to the Engineer by the Contractor for each important item of work like construction of embankments and subgrade, pavements, pile/well foundations, concreting, prestressing, repair and rehabilitation of existing structures, concrete superstructure, dismantling of structures and pavement and for any other item as directed by the Engineer.

These statements shall give information on

- i) Details of personnel both for execution and quality control of thework.
- ii) Equipment deployment with details of number of units, capacity, standby arrangements
- iii) Sequence of construction, details of temporary or enabling works like, diversions, cofferdams, formwork including specialized formwork for superstructure, details of borrow areas, method of construction of embankment and subgrade, pavements, piles, wells, concreting procedures, details of proprietary process and products (e.g. details of prestressing systems, proprietary piling systems, bearings, expansion joints etc.) and details of equipment to be deployed. Wherever necessary, technical literature, design calculations and drawings shall be included in the methodsstatement.
- iv) Testing and acceptance procedures including documentation.
- v) Special part of the Q.A. Programme referred in clause 105.3 for the particular item of work shall be submitted along with the methods statement for the concernedactivity.
- vi) Engineer shall examine and approve the methods statement or direct the Contractor to resubmit the statement with required modifications. The modified statement shall be submitted within 14 days of receipt of Engineer'scomments.

The sole responsibility for the safety and adequacy of the methods adopted by the Contractor shall rest on the Contractor irrespective of any approval given by the Engineer.

Sub-Clause115.2 Approval of Proprietary Product/Process/System

Only proprietary products proven by International usage in comparable projects shall be permitted to be used. Fully authenticated details of licensing and collaboration arrangement shall be submitted by the manufacturer, where relevant.

Within 90 days of award of work the Contractor shall submit the following information for all proprietary products for approval by the Engineer.

i) Name of manufacturer and name of product/ process/system.

Complete details of the manufacturer of the product/ process/ system shall be furnished. Details of projects where similar product/process/system has been successfully used shall be furnished. Authenticated copies of

license/collaboration agreement shall be furnished.

ii) General features of the product/product process/system.

Detailed write up with methods statements shall be furnished for each product/ process/ system. This shall include complete working drawings & installation drawings, technical specifications covering fabrication, materials, system of corrosion protection etc.

- i) Details of product development and developmenttesting.
- ii) Acceptance test andcriteria.

Manufacturer shall submit a quality assurance system document. Details of acceptance test and criteria of acceptance shall be furnished in this document.

- i) Installationprocedure.
- ii) Maintenance procedure and schedule.
- iii) Warranty proposal.

The Engineer may instruct any additional tests for the purpose of accepting the product. The charges of these additional tests shall be borne by the Employeronly in case the product satisfies thespecifications.

CLAUSE 120

FIELD LABORATORY

Sub-Clause 120.2 Description

Replace the words "indicated in the drawings" in the first sentence of second paragraph of this Clause with the words "per provisions indicated in this Clause and at a location approved by the Engineer."

Replace "electric supply etc." to the second sentence of first paragraph by "including uninterrupted power supply etc."

Delete the first sentence of second paragraph "The floor space in the drawing" and substitute the following:

"The floor space required for the field laboratory shall be not less than 200 sq.m.

"The fourth sentenceofsecond paragraphs "Thefurnishing In Table100-2" shall read as under.

"A good semi furnished office accommodation shall be provided to the Material Engineers of the Supervision Team as per the direction of the Engineer."

Add the following at the end of this Clause:

"There shall also be provided a concrete paved area, for storing samples adjacent to the laboratory, of about 100 sq.mand another 75 sq.mshall be suitably roofed with open sides giving protection against sun and rain.

Within 14 (fourteen) days of the commencement date, the Contractor shall prepare and submit a layout plan and details of the laboratory building and make/supplier of theequipment to the Engineer for his approval.

The field laboratory to be provided under the Contract shall be handed over to the Engineer in finished and fully equipped condition not later than 2 months after the

receipt of Notice to Commence Work, and the field laboratory with all equipment/ instrument shall be to the entire satisfaction of the Engineer. During the 2-month period starting from the Notice to Commence work, the laboratory tests shall be performed in another laboratory proposed by the Contractor and approved by the Engineer.

Laboratory Equipment

General

The items of laboratory equipment shall be provided in the field laboratory depending upon the items to be executed as per Table mentioned below instead of Table 100-2 shown in MORTH:

The following items of laboratory equipment shall be provided in the field laboratory:

The equipment and instruments shall be new and shall be quality certified by Bureau of Indian Standards (BIS).

Sr. No.	Sub No.	Item, Specifications	Nos. required					
	•	A: General						
(i)		Balance						
	(a)	7 kg to 10 kg capacity semi -self indicating Electronic Type –Accuracy 1 gm	2					
	(b)	500 gm capacity semi-self-indicating Electronic Type – Accuracy 0.01 gm	2					
	(c)	Chemical balance 100gm capacity - Accuracy 0.0001gm	1					
	(d)	Pan balance 5 kg capacity - Accuracy 0.5 gm	2					
	(e)	Platform Scale – 300 kg capacity	1					
	(f)	Triple Beam balance-25kg capacity Accuracy 1gm	2					
(ii)		Ovens – Electrically operated, thermostatically controlled						
	(a)	(a) From 100°C to 220°C – Sensitivity						
(iii)		Sieves, as per IS 460-1962						
	(a)	IS Sieves 450 mm internal dia. of sieve sets as per BIS of required sieve sizes complete with lid and pan	2 set					
	(b)	IS sieve 200 mm internal dia. (brass frame and steel or brass wire cloth mesh) consisting of sieve sets of required sieve sizes complete with lid and pan	2 set					
(iv)		shaker capable of taking 200 mm and 450 mm dia. Sieves electrically sed with time switch assembly (As per BIS)	1					
(v)	200 to	nes compression testing machine	1					
(vi)	Stop w	vatches 1/5 sec. Accuracy	2					
(vii)	cc capa	Glassware comprising of Beakers, Pipettes, dishes, measuring cylinders (100 to 1000 cc capacity) glass rods and funnels, glass thermometers range 0°C to 100°C and metallic thermometers range 300°C						
(viii)	Hot pla	ates 200 mm dia (1500 watt)	6					
(ix)		Enamel trays						
	(a)	600 mm x 450 mm x 50 mm	10					

	(b)	(b) 450 mm x 300 mm x 40 mm							
	(c)	(c) 300 mm x 250 mm x 40 mm							
	(d)	Circular plates of 250 mm dia.	6						
(x)	Water	Testing Kit	1						
(xi)	First Aid Box								
(xii)	Spatula Set of 100 and 200 long								
(xiii)	Digging Tools (pixels, shovel, fork etc.)								
(xiv)	Miscellaneous tools (sledgehammer, lump hammer, wooden pegs etc.)								
(xv)	Maximum and Minimum Thermometer								
(xvi)	Rain Gauge								
(xvii)	Timer (0-60 minutes with alarm & 1/5 sec accuracy.	3 Sets						

		B: For Soils and Aggregates												
(i)	Water	Water still, 3 litre/hr with fittings and accessories Liquid limit device with Casagrande and ASTM grooving tools as per IS:												
(ii)	Liquid 2720	limit device with Casagrande and ASTM grooving tools as per IS:	1											
(iii)	Sampl													
(iv)		Compaction apparatus (Proctor) as per IS: 2720 (Part 8) complete with collar, base plate and hammer												
(v)	Heavy	Modified AASHTO compaction apparatus as per IS. 2720 (Part 7) 1980 or Heavy Compaction Apparatus as per IS complete with collar, base plate and 1 set hammer												
(vi)		Sand pouring cylinder with conical funnel and tap and complete as per IS 2720 (Part 28) 1980 including modified equipment												
(vii)	Sampling tins with lids 100 mm dia x 75 mm ht ½ kg capacity and miscellaneous items like moisture, tins with lid (50 grams) etc.													
(viii)	Lab CBR testing equipment for conducting CBR testing, load frame with 5 Ton capacity, electrically operated with speed control as per IS: 2720 (Part 16), and consisting of following:													
	(a) CBR moulds 150-mm dia – 175-mm ht complete with collar, base plateetc.													
	(b)	Tripod stands for holding dial gauge holder	24											
	(c)	CBR plunger with settlement dial gauge holder	1											
	(d)	Surcharge weight 147-mm dia 2.5 kg weight with centralhole	48											
	(e)	Spacer disc 148-mm dia, 47.7-mm ht. With handle	3											
	(f)	Perforated plate (Brass)	24											
	(g)	Soaking tank for accommodating 24 CBR moulds												
	(h)	Provingringsof1000kg,2500kgand5000kgcapacity	1 each											
	(i)	Dial gauges, 25 mm travel- 0.01 mm/division	10											
	(j) Aluminium Tis 50x30m													
	55x35		36 nos											
	70x45		36 nos											
	70x50		36 nos											
	80x50	m	36 nos											

(ix)	Standard Penetration test equipment	1
(x)	Nuclear Moisture Density Meter or equivalent	2
(xi)	Speedy moisture meter complete with chemicals	2
(xii)	Unconfined compression test apparatus	1 set
(xiii)	Aggregate Impact Test Apparatus	1
(xiv)	Aggregate Impact Test Apparatus as per IS 2386 (Part 4)1963	1
(xv)	Los Angeles abrasion Test Apparatus as per IS 2386 (Part 4)1963	1
(xvi)	Riffle Box of Slot size of 50mm as per ASTM C-136	1

	C: For Bitumen and Bituminous Mixes							
(i)	Constant temperature bath for accommodating bitumen	2						
	Test specimen electrically operated and thermostatically controlled, 50-liter capacity							
	temp. range ambient 80o C							
(ii)	Penetrometer automatic type, adjustable weight arrangement and needles as per IS.	2						
(11)	1203 – 1978							
(iii)	Solvent extraction or centrifuge type apparatus complete (AASHTO, T-164) with							
(111)	extraction thimbles with stocks of solvent and filter paper	1						
(iv)	Laboratory mixer including required accessories about .02 cum capacity electrically	1						
(17)	operated fitted with heating jacket							
	Marshall compaction apparatus automatically operated as per ASTM 1559-62 T and							
	complete with electrically operated loading unit, compaction pedestal heating head							
(v)	assembly, dial micrometre and bracket for flow measurement, load transfer bar,							
	specimen mould 100 mm dia. (4 in) with base plate, collars, specimen extractor,	1 set						
	compaction hammer 4.53 kg (10 lb.) x457 mm (18 in) fall	1 361						
(vi)	Distant Reading Digital Thermometer for Measuring Temperatures in Asphaltic Mixes							
	Distant Nedding Digital Memoriteter for Wedsaring Temperatures in Asphariae Wines							
(vii)	Riffle Box	1						
(viii)	Automatic Asphalt Content Gauge [Nuclear are equivalent]	1						
(ix)	Thin film Oven test apparatus to the requirement of AASHTO T 179, including	1						
(177)	accessories	_						
(x)	Ring Ball Apparatus as per IS 1205- 1978	1						
(xi)	Asphalt Institute Vacuum Viscometer as per IS	1						
(///	1206(part II) – 1978	_						
(xii)	BS U- Tube Modified Reverse Floro Viscometer IS 1206(Part III) – 1978	1						
(xiii)	Apparatus for Determination of Ductility Test as per	1						
(7111)	IS 1208 – 1978	1						
(xiv)	Pen Sky – Martars closed Tester for testing flashandfire point as per IS 1209 –	1						
(XIV)	1978.	1						
(xv)	Apparatus for Float Test – IS – 1210 – 1978	1						
(xvi)	Apparatus for Determination of water content (Deanand Shark Method) IS – 1211	1						
(^V)	– 1978							
(xvii)	Apparatus for Determination of Loss on Heading IS—1212-1978.	1						
(xviii)	Apparatus of Determination of specified Gravity IS- 1202-1978	1						

(xix)	Core cutting machine with 100mm dia. Diamond cutting Edge	1
(xx)	Apparatus for Elastic Recovery test for Modified Bitumen	1
(xxi)	Apparatus for Storage Stability test for Modified Bitumen	1
(xxii)	Apparatus for Separation test for modified bitumen	1

		D: For Cement, Cement Concrete and Materials						
(i)	Water	still	1					
(ii)	Vicat r	needle apparatus for setting time with plungers, as per IS. 269-1967	1					
(iii)		Moulds						
	(a)	150 mm x 300 mm ht cylinder with capping component	As required					
	(b)	150mmx150 mm x150mm cubical for compressive strength	As required					
	(c)	150mmx100 mm x600mm beam for flexural strength	As required					
(iv)	Concre	ete permeability apparatus	1					
(v)	High fr	requency mortar cube vibrator for cement testing	1					
(vi)	Concre	ete mixer power driven, 1 cu ft. capacity	1					
(vii)	Variable frequency and amplitude vibrating table size 1 metre x 1 metre, as per the relevant British Standard							
(viii)	Flakiness & Elongation test apparatus 2each							
(ix)	Aggre	gate impact test apparatus as per IS 2386 (Part 4) 1963	2					
(x)	Los Angeles abrasion apparatus as per IS. 2386 (Part 4) 1963							
(xi)	Flow table as per IS 712-1973							
(vii)	(a) Equipment for slump test							
(xii)	(b)	Compaction factor test equipment	1					
(xiii)		ment for determination of specific gravity for fine and coarse aggregate as per 6 (Part 3) 1963	2					
(xiv)	Flexur	al attachment to compression testing machine	1					
(xv)	Core c	utting machine with 150 mm dia. Diamond cutting edge	1					
(xvi)	Needle	e vibrator	1					
(xvii)	Vibrat	ing hammer as per BS specification	1					
(xviii)	Air ent	trainment meter ASTM C - 231	1					
(xix)	0.5 Cft	0.5 Cft, 1 Cft cylinder for checking bulk density of aggregate with tamping rod 1						
(xx)	Sound	Soundness testing apparatus for cement 1						
(xxi)	Flexur	al Beam testing machine with accessories	1					
(xxii)	Chemi	cals solutions and consumable	As reqd.					
(xxiii)	Chloric	de Testing kit for chemical analysis of chloride content.	1					
(xxiv)	ION Ex	change kit for rapid determination of sulphate content.	1					

E: For Control of Profile and Surface Evenness

(i)	Digital	gital Level complete with all accessories						
(ii)	Diston	istomat or equivalent						
(iii)	Theod	heodolite – Electronically operated with computerized output attachment						
(iv)	Total S	Station with all accessories	2 sets					
(v)	Towed	Fifth Wheel Bump Indicator	1 set					
(vi)	3mete	r straight edge and measuring wedge	2 sets					
	Cambe	er templates 2 lane						
(vii)	String	String line Arrangement with paver and sensor powers						
	(a)	(a) Crown type cross-section						
	(b)	Straight run cross-section	2 sets					
(viii)	Steel t	аре						
	(a)	5 m long	as reqd					
	(b)	10 m long	as reqd					
	(c)	20 m long	as reqd					
	(d)	30 m long	as reqd					
	(e)	50 m long	As reqd					
	(e)	50 m long	As reqd					
(ix)	Precisi	ion Staff	3 Sets					

Note: The laboratory set-up must be complete including a set of reference standards, adequately staffed and operational to the satisfaction of the Engineer not later than 2 months from the date of receipt of Notice to commence theworks.

Sub-Clause 120.3 Ownership

This Clause shall read as under:

"Land for the laboratory shall be provided by the Contractor."

Sub-Clause 120.4 Maintenance

This Clause shall read as under:

"The Contractor shall arrange to maintain the field laboratory including sample store yards in a satisfactory manner until the issue of Taking over Certificate for the whole work. Maintenance includes all activities described in Clause 120.4 and maintenance of equipment and running of the same including chemicals and consumables."

Sub-Clause 120.5 Rate

The construction, supply, installation, maintenance, and operation including all consumables like chemicals &reagents etc., and all other expenses involved in connection thereto for the field laboratory shall be incidental to the work, and shall not be paid for separately.

SECTION 200 Site Clearance

CLAUSE 201 CLEARING AND GRUBBING

Sub-Clause 201.1 Scope

Replace with following Para:

This work shall consist of cutting, excavating, removing, and disposing of all

materials such as trees of girth up to 300 mm, bushes, shrubs, stumps, roots, grass weeds, rubbish etc. and top soil up to 150 mm, which in the opinion of Engineer isunsuitable for incorporation in the work including draining out stagnant water if any from the area of road land, drain, cross drainage structure and other area as specified in the drawing or instructed by Engineer. It shall include necessary excavation by harrow discs or any other suitable equipment, backfilling of the pits by suitable soil, resulting from uprooting of trees & stumps and making the surface in proper grade by suitable equipment and compacted by power roller to required compaction as per Clause 305.3.4. The work also includes handling, salvaging and disposal of cleared material. Clearing and grubbing shall be performed less than one month in advance of earthwork operation and in accordance with requirement thesespecifications.

CLAUSE 202

DISMANTLING CULVERTS, BRIDGES AND OTHER STRUCTURES/ PAVEMENTS

Sub-Clause 202.5

Disposal of Materials

The first paragraph of the sub clause shall read as below:

All materials obtained of dismantling/milling shall be the property of the Contractor for which he shall quote a rate for rebate in BOQ Bill No. 1, and the Contractor shall be free to use this material in work, or he may sell/dispose the material to as desired / deemed fit by him.

The existing pavement crust shall be reused as indicated below:

Contractor shall be free to use dismantled / milled material, as is where basis is, or by suitably modifying the material, or by crushing the material, or by breaking the material, and screening the same, provided it meets the specifications and is approved by the Engineer.

SECTION 300

Earthwork, Erosion Control and Drainage

CLAUSE 301

EXCAVATION FOR ROADWAY AND DRAINS

Sub-Clause 301.1

Scope

Add the following as second paragraph under this clause:

"The work shall also include excavation for channel training at culverts/bridges, excavation of existing shoulders and medians for purposes of widening the pavement and excavation of existing embankment for reconstruction to specification."

CLAUSE 304

EXCAVATION FOR STRUCTURES

Sub-Clause 304.3.2

Excavation

At the end of 1st paragraph of Clause 304.3.2 inserts the following additional sentences:

"The Contractor shall ensure the stability and structural integrity of adjacent existing foundations and structures and if necessary shall, at his own expense, install temporary or permanent sheet piles, coffer dams, shoring or similar as support or protection to the satisfaction of the Engineer."

CLAUSE 305

EMBANKMENT CONSTRUCTION

Sub-Clause 305.2

Material and General Requirements

Sub-Clause 305.2.1 Physical Requirements:

Sub-Clause 305.2.1.2 Add the following after second paragraph:

"Soils having medium and high swelling potential shall be defined based onLiquid Limit, Plastic Limit, Shrinkage Limit, Gradation, Free swelling Index, Field dry Density and Field Moisture Content and types of Clay minerals present in the soil and as directed by the Engineer. The location and the extent of these soils with medium to high swelling potential should be defined as directed by the Engineer."

Sub-Clause 305.2.2.2 Borrow Materials

Para 1 of this Clause shall read as under:

"No borrow area shall be made available by the Employer for this work. The arrangement for the source of supply of the material for embankment and subgrade as well as compliance to the different environmental requirements in respect of excavation and borrow areas as stipulated, from time to time, by the Ministry of Environmental and Forest, Government of India and the local bodies, as applicable, shall be the sole responsibility of the Contractor."

Sub-Clause 305.2.2.4 Compaction Requirements

In Clause 305.2.2.4 delete Table 300-2 and substitute the following:

Table 300-2
Compaction Requirements of Embankment and Subgrade

Sr. No.	Type of Work/Material	Relative Compaction as %age of maximum laboratory dry density as per IS 2720 (Part 8)					
1	Subgrade and earthen shoulders	Not less than 97%					
2	Embankment	Not less than 95%					
3	Expansive clays	Not allowed					
4	Design CBR of Subgrade & Shoulder has been taken 8. The borrow earth used for subgrade material must satisfied the requirement of the design CBR of 8 %						

Para 2 of this Clause given below Table 300-2 shall read as under:

The contractor shall at least 21 working days before commencement of construction of embankment and the subgrade; submit the following to the Engineer for approval:

- (i) The values of maximum dry density and optimum moisture content obtained in accordance with IS: 2720 (Part 8) for each fill material proposed to be used in the construction of embankment and subgrade.
- (ii) The graphs of Density plotted against moisture content from which each of the values in (i) above of maximum dry density and optimum moisture content were determined.
- (iii) The dry density-moisture content-CBR relationships, heavy comp active efforts conforming to the IS2770 (part 8) for each of the fill material proposed to be used in the subgrade.

The above information shall form the basis for compaction only upon its approval by the Engineer."

Sub-Clause 305.3 Construction Operations

Sub-Clause 305.3.4 Compacting Ground Supporting Embankment/Subgrade

Para 1 of this clause shall be read as

"Where necessary the original ground shall be levelled, scarified, mixed with water and then compacted by rolling to facilitate placement of first layer of embankment so astoachieveminimum drydensityasgiveninTable300-2.

Sub-Clause 305.8 Measurement for Payment

Substitute Clause 305.8.1 shall be read as

"Earth embankment/sub-grade construction shall be measured separately by taking cross sections at intervals after clearing and grubbing and if necessary compaction of original ground before the embankment work starts and after its completion and computing the volumes of earthwork in cubic metres by the method of average and areas."

CLAUSE 306 SOIL EROSION AND SEDIMENTATION CONTROL

Sub-Clause 306.4 Measurements for Payment

Substitute Clause 306.4 as follows:

"All temporary sedimentation and pollution control works shall be deemed as incidental to the earthwork and other items of work and as such no separate payment shall be made for thesame."

SECTION 400 Sub-Bases, Bases (Non-Bituminous) and Shoulders

CLAUSE 401 GRANULAR SUB BASE

Sub-Clause 401.1 Scope

Add the following at the end of this Clause:

"A site trial shall be performed in accordance with Clause 901.16."

Sub-Clause 401.2.2 Physical Requirements

Add at the end of this clause as under:

The Contractor shall, at least 21 working days before the commencement of the construction of the sub-base course, submit to the Engineer, the results for approval of the laboratory testing on the physical properties defined above. The construction of the sub-base course shall be taken up only upon the Engineer's approval of the material.

Grading-I of table 400-1 shall be adopted at site.

CLAUSE 406 WET MIX MACADAM SUBBASE/BASE

Sub-Clause 406.4 Opening to Traffic

The Clause shall be read as follows:

No vehicular traffic of any kind shall be allowed on the finished wet mix

macadam surface.

SECTION 500 Base and Surface Courses (Bituminous)

Sub-Clause 501.2 Materials

Sub clause 501.2.1 Binder

Binder of VG-10 grade shall be used or if available viscosity grade of bitumen

shall be used in accordance with IS: 73

Sub-Clause 501.2.2 Delete "Crushed gravel or other hard material" from first Line of Para 1."

Para 3 isdeleted.

CLAUSE 505 DENSE BITUMINOUS MACADAM

Sub-Clause 505.2.1 Bitumen

Binder of VG-10 grade shall be used or if available viscosity grade of bitumen

shall be used in accordance with IS: 73.

CLAUSE 507 BITUMINOUS CONCRETE

Sub-Clause 507.2.1 Bitumen

Binder of VG-10 grade shall be used.

SECTION 800 Traffic Signs, Markings and Other Road Appurtenances

CLAUSE 803 ROAD MARKINGS

Sub-Clause 803.2 Materials

This clause shall read as under:

"Road markings shall be hot applied thermoplastic compound and the materials shall meet the requirements as specified in Clause 803.4.

The road markings shall be laid in one layer with appropriate road marking machine approved by the Engineer. Before the road-marking machine is used on the permanent works, the satisfactory working of the machine shall be demonstrated on a suitable site, which is not part of the permanent works. The rate of application shall be checked and adjusted as necessary before application on a large scale is commenced, and thereafterdaily."

CLAUSE 806 ROAD DELINATORS

Sub-Clause 806.2 This clause shall read as follows:

- a) Triangular Object Marker shall be 300mm side with four red reflectors, made out of 2mm thick aluminium sheet, face to be fully covered by high intensity grade white retro reflective sheeting of encapsulated lens type as per clause 801. The background/border/symbolsshall bemadebyscreen-printingof desiredcolouras per sign details. The sign plate shall be fixed with 6mm dia. aluminium rivets on MS angle iron frame. The angle iron frame shall be made with angle of size 40mmx40mmx5mm. The sign shall be fixed with nut-bolts & welding on MS pipe 50mm dia (NB-MW) and 500mmhigh.
- b) Rectangular hazard marker 600mm x 300mm made out of 2mm thick aluminium sheet, face to be fully covered by high intensity grade white retro reflective sheeting of encapsulated lens type. The background/ border/ symbols shall be made by screen-printing of desired colour as per sign details. The sign plate shall be fixed with 6mm dia aluminium rivets on MS angle iron frame. The angle iron frame shall be made with angle of size 40mmx40mmx5mm. The sign shall be fixed to 80mm dia (NB-MW)

MSpipe.

- c) Roadway Indicators shall be 1000mm high made with 100 mm dia. NB medium weight MS pipe. One reflector of high intensity grade retro reflective sheeting with encapsulated lens shall be provided on top of the reflector. The white & red reflector shall be provided alternatively of 40mm width, so that total width of reflector shall be 120mm. A wire mesh cover of 150mm height shall be provided ontop.
- d) All components of signs & supports shall be thoroughly descaled, cleaned, primed and painted with two coats of epoxy paint. The sign backside shall be with grey colour and post shall be white colour/ alternate white & black bands. The post below ground shall be painted with three coats of redlead.

Clause 2100 Open Foundation

Sub-Clause 2104.1 Preparation of Foundation

Please add the following as a last para-

Considering the soil SBC as per Geotechnical report, 1 m of depth below the founding level of bridges shall be removed and replaced with granular sand. The cost of the excavation and sand shall be made from respective items.

Schedule - E

(See Clauses 2.1 and 14.2)

Maintenance Requirements

1. MaintenanceRequirements

- (i) The Contractor shall, at all times maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- (ii) The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfilment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Terminationthereof.
- (iii) All Materials works and construction operations shall conform to the MORTH Specifications for Road and Bridge Works, and the relevant IRC publications. Where thespecifications for aworkare not given, Good Industry Practice shall be adopted.

[Specify all the relevant documents]

2. Repair/rectification of Defects anddeficiencies

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex - I of this Schedule-E within the time limit set forth therein.

3. Other Defects anddeficiencies

In respect of any Defect or deficiency not specified in Annex - I of this Schedule-E, the Authority's Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority's Engineer.

4. Extension of timelimit

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Such additional time shall be determined by the Authority's Engineer and conveyed to the Contractor and the Authority with reasons thereof.

5. Emergencyrepairs/restoration

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage to property, the Contractor shall promptly take all reasonable measures for eliminating or minimizing such danger.

6. Daily inspection by the Contractor

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at

any time during office hours.

7. Pre-monsoon inspection / Post-monsooninspection

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

8. Repairs on account of naturalcalamities

(a) All damages occurring to the Project Highway on account of a Force Majeure Event or wilful default or neglect of the Authority shall be undertaken by the Authority at its own cost. The Authority may instruct the Contractor to undertake the repairs at the rates agreed between the Parties

Annex -I

(Schedule-E)

Repair/rectification of Defects and deficiencies

The Contractor shall repair and rectify the Defects and deficiencies specified in this Annex-I of Schedule-E within the time limit set forth in the table below.

Table -1: Maintenance Criteria for Pavements:

		Level of S	ervice (LOS)	Frequency			Time limit for	Maintenanc
Asset Type	Performance Parameter	Desirable	Acceptable		Tools/Equipment	Standards and References for Inspection and Data Analysis	Rectification/ Repair	e Specification s
Flexible Pavement (Pavement o MCW, Service Road Approaches	Potholes	Nil	< 0.1 %of area and subject to limit of 10 mm in depth	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC 82: 2015 and Distress Identification Manual for Long Term Pavement Performance Program, FHWA2003(http://www.tfhrc.com/p avement/lttp/reports/03031/)	24-48 hours	MORT&H Specification 3004.2
		Nil	< 5 %subject to limitof0.5 sq.m for any 50 m length	Daily			7-15 days	MORT&H Specification 3004.3
of Grade structure, approaches	Rutting	Nil	< 5 mm	Daily	Straight Edge		15 -30 days	MORT&H Specification 3004.2
of connecting roads, slip roads, lay byes etc. as applicable)	Corrugations and Shoving	Nil	< 0.1% ofarea	Daily	Length Measurement Unit like		2-7 days	IRC:82- 2015
	Bleeding	Nil	< 1 % of area	Daily	Scale, Tape,		3-7 days	MORT&H Specification 3004.4
	Ravelling/Strippi ng	Nil	< 1 % of area	Daily	odometer etc.		7-15 days	IRC:82- 2015 read

		Level of Service (LOS)		Frequency			Time limit for	Maintenanc
Asset Type	Performance Parameter	Desirable	Acceptable		Tools/Equipment	Standards and References for Inspection and Data Analysis	Rectification/ Repair	e Specification s
								with IRC SP 81
	Edge Deformation/ Breaking		< 1 m for any 100 m section and width <0.1 matanylocat ion,restricte d to 30 cm from the edge	Daily			7- 15 days	IRC:82-2015
	Roughness BI	2000mm/ km	2400mm/k m	Bi- Annually	Class I	Class I Profilometer: ASTM E950 (98) :2004 –Standard Test Method for	180 days	IRC:82-2015
	Skid Number	60SN	50SN	Bi- Annually	Profilometer SCRIM(Sideway- force	measuring Longitudinal Profile of Travelled Surfaces with	180 days	BS: 7941-1: 2006
	Pavement Condition Index	3	2.1	Bi- Annually	CoefficientRoutin e Investigation	Accelerometer Established Inertial Profiling Reference ASTM E1656 -94: 2000- Standard Guide for Classification of Automatic Pavement Condition Survey Equipment	180 days	IRC:82- 2015
	Other Pavement Distresses			Bi- Annually			2-7 days	IRC:82- 2015
	Deflection/ Remaining Life			Annually	Falling Weight Deflectometer	IRC 115: 2014	180 days	IRC:115- 2014
Rigid Pavement	Roughness BI	2200m m/km	2400mm /km	Bi- Annually	Class I Profilometer	ASTM E950 (98) :2004 and ASTM E1656 - 94: 2000	180 days	IRC:SP:83- 2018
(Pavement of MCW, Service Road,	Skid	differer	tance no. at it speed of nicles	Bi- Annually	SCRIM (Sideway- force	IRC:SP:83-2018	180 days	IRC:SP:83- 2018

Asset Type		Level of S	Service (LOS)	Гиодиодо			Time limit for	Maintenanc
	Performance Parameter	Desirable	Acceptable	Frequency of Inspect ion	Tools/Equipment	Standards and References for Inspection and Data Analysis	Rectification/ Repair	e Specification s
Grade structure, approaches of connecting road, slip roads, lay byes etc. as applicable)		Minimum SN 36 33 32 31		(Km/h) 50 65 80	Coefficient Routine Investigation Machine or equivalent)			
Embankment / Slope	Edge drop at shoulders	Nil	40m m	Daily			7-15 days	MORT&H Specification 408.4
	Slope of camber/c ross fall	Nil	<2%variatio n inprescribed slope of camber/cros s fall	Daily	Length Measurement Unit like Scale, Tape, odometer etc.		7-15 days	MORT&H Specification 408.4
	Embankmont	Nil	<15 %variation inprescribe side slope	Daily		IRC	7-15 days	MORT&H Specification 408.4
	Embankment Protection	mbankment Nil Nil Daily NA		NA		7-15 days	MORT&H Specification	
	Rain Cuts/ Gullies in slope	Nil	Nil	DailySpeci ally During Rainy	NA		7-15 days	MORT&H Specification

Asset Type	Performance		of Inspect	Tools/Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/ Repair	Maintenanc e Specification
							S
			Season				

In addition to the above performance criterion, the contractor shall strictly maintain the rigid pavements as per requirements in the following table

Table -2:Maintenance Criteria for Rigid Pavements:

		Measured	Degree		Repair Action		
Sr.No	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2	
CRACI	KING						
			0	Nil, not discernible	Nia Aatian	Ni ati amuli adala	
			1	w < 0.2 mm. hair cracks	No Action	Not applicable	
			2	w = 0.2 - 0.5 mm, discernible		Cool and altabate if I a	
		w = width of crac	k	from slow-movingcar	-Coal without dolay	Seal, and stitch if L > Im.	
1	SingleDiscreteCracksNotintersecting	L = length of crac	13)	w = 0.5 - 1.5 mm, discernible	Seal Williout delay	Within 7days	
1	with any joint	d = depth of crac	k ³	from fast-movingcar		within 7days	
		D = depth ofslab	4	w = 1.5 - 3.0 mm		Staple or Dowel Bar	
			5	w > 3 mm.	Seal, and stitch if L > m. Within 7 days	Retrofit, FDR fo affected portion. Within 15days	
		w = width of crack	0	Nil, not discernible	No Action		
				1	w < 0.2 mm, hair cracks	Route and seal with	Staple or Dowel Bar
				2	w = 0.2 - 0.5 mm, discernible	' ' '	Retrofit.
				from slow vehicle	Within 7 days	Within 15days	
า	Single Transverse (or Diagonal) Crack		1	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route, seal and stitch if L > 1m. Within 7 days		
2	intersecting with one or morejoints	d = depth of crack D = depth ofslab	k 4	w = 3.0 - 6.0 mm	Dowel Bar Retrofit Within 15 days	Full Depth Repair Dismantle and	
			5	w > 6 mm, usually associated with spalling, and/or slab rocking under traffic	Not Applicable, as it may befull depth	reconstructaffected. Portion with norms and specifications - See Para 5.5 & 9.2Within 15days	
	Single Longitudinal Crack intersecting	gw = width of crac	k0	Nil, not discernible	No Action		
5	with one or more joints	L = length of crac	k <u>1</u>	w < 0.5 mm, discernable from	Seal with epoxy, if L >	Staple or dowel bar	

		IVIDACIIIPON	Degree		Repair Action		
Sr.No.	.Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2	
		d = depth of cracl D = depth ofslab		slow movingvehicle	1 m. Within 7 days	retrofit. Within 15days	
		·	2	W = 0.5 - 3.0 mm, discernible	Route seal and stitch ifL> I m. Within 15 days	-	
			3	M = 3.0 - 6.0 mm	Staple, if L > 1 m Within 15 days	Partial Depth Repair	
			4	w = 6.0 - 12.0 mm, usually associated withspalling		withstapling.Within 15 days	
			5	w > 12 mm, usually associated with spalling, and/or slab rocking under traffic		Full Depth Repair tDismantle and reconstruct affected portion as pernorms And specifications - See Para 5.6.4 Within 15 days	
			0	Nil, not discernible	No Action		
			2	w < 0.2 mm, hair cracks w = 0.2 - 0.5 mm. discernible from slow vehicle	Seal, and stitch if L > m. Within 15 days		
4	MultipleCracks intersecting with one or morejoints	w = width of crack	3	w = 0.5 - 3.0 mm, discernible from fast vehicle		Dismantle, Reinstate subbase, Reconstruct	
			4	w = 3.0 - 6.0 mm panel broken into 2 or 3pieces	Full depth repair within 15 days	subbase, Reconstruct whole slab as per specifications within 30	
			5	w > 6 mm and/or panelbroken into more than 4 pieces		days	
5	Corner Break	w = width of cracl		Nil, not discernible	No Action	-	
	Corner Break	L = length of crack	1	w < 0.5 mm; only 1 corner	Seal with low	Seal with epoxy seal	

		Measured	Degree		Repair Action		
Sr.No	Type of Distress	Parameter	of Assessment Rating Severity		For the case d < D/2	For the case d > D/2	
				broken	viscosity epoxy to	withepoxy	
			2	w < 1.5 mm; L < 0.6 m, only one cornerbroken	Within 7 days	Within 7days	
			3	w < 1.5 mm; L < 0.6 m, two corners broken	/n c	Full depth repair Reinstate sub-base,	
			4	w > 1.5 mm; L > 0.6 m or three corners broken	Figure 8.3 of IRC: SP: 83-2008)	and reconstructthe slab as per norms and	
			5	three or four corners broken	Within 15 days	specifications within 30days	
			0	Nil, not discernible		No Action	
		w = width of crack L = length(m/m2)	1	w < 0.5 mm; L < 3 m/m ²		Seal with low viscosity	
	Punch out (Applicable to Continuous Reinforced Concrete Pavement (CRCP) only)		2	either w > 0.5 mm or L < 3 m/m ²	Annlicable as it may	epoxy to secure broken parts.	
			k 3	$w > 1.5 \text{ mm and } L < 3 \text{ m/m}^2$		Within 15days	
6			4	w > 3 mm, L < 3 m/m ² and deformation		out and replace	
			5	w > 3 mm, L > 3 m/m ² and deformation		damaged area taking care not to damage reinforcement. Within30days	
			0	Nil, not discernible	Short Term	Long Term	
			<u> </u>	ivii, not discernible	No action.	ļ	
		r = area damaged	d <u>1</u>	r < 2 %	Local repair of		
7	RavellingorHoneycombtype surface	surface/total surface of slab (%) h = maximum depth of damage	1)	r = 2 - 10 %	areas damaged and liable to be damaged. Within 15 days	Not Applicable	
			3		Bonded Inlay, 2 or 3	3	
			4	r = 25 - 50 %	slabs if affecting.		

		Measured	Degree		Repair Action	
Sr.No.	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2
					Within 30 days	
			5		Reconstruct slabs, 4 or more slabs ifaffecting. Within 30 days	
			0	Niil wat diaaawaibla	Short Term	Long Term
		r =	0	Nil, not discernible	No action.	_
1		damaged	1	r < 2 %	Local repair	
8	Scaling	surface of slab (%)	= maximum2	r = 2 - 10 %	ofareas	Not Applicable
			3	r = 10 - 20%	Bonded Inlay withir	า
				r = 20 - 30 %	15 days	
			5	r > 30 % and h > 25 mm	Reconstruct slat within 30 days	o O
			0		Negation	
			1	t > 1 mm	No action.	
			2	t = 1 - 0.6 mm	Monitor rate o	Not Applicable
			3	t = 0.6 - 0.3 mm	deterioration	1
		t = texture depth	4	t = 0.3 - 0.1 mm	deterioration	
9	Polished Surface/Glazing	sand patchtest	5	t < 0.1 mm	DiamondGrindingif affecting50% or more slabs ina continuousstretch o minimum 5 km. Within 30 days	a
10	Pop out (Small Hole), Pothole R	Refer	0	d < 50 mm; h < 25 mm; n < 1	Negation	
10	Para 8.4	n =	O	per 5 _m 2	No action.	

		Measured	Degree		Repair Action	,
Sr.No	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2
		number/m ² d =		d=50-100mm;h<50mm;n<1		
		diameter h =	= 1	per 5 m ²	Partial depth repair	•
		maximumdepth	2	d=50-100mm;h>50mm;n<1	65 mm deep. Within 15 days	
			2	per 5 m ²	Within 13 days	Not Applicable
			2	d = 100 - 300 mm; h < 100 mm		
			3	n < 1 per 5m ²		
			4	d = 100 - 300 mm; h > 100 mm;		
			4	n < 1 per 5m ²		
			E	d > 300 mm; h > 100 mm: n > 1		
			5	per 5 m ²		
Joint	Defects					
					Short Term	Long Term
			0	Difficult to discern.		
					No action.	
			1	Discernible, L< 25% but of little		
				immediate consequence with regard to ingress of water or	Klaan laint inchact	
				trapping incompressible	llater	
		loss o	1	material.		
11	Joint Seal Defects	damage L = Length		Notable. L > 25% insufficient protection against ingress of		
		as % tota jointlength		protection against ingress of	Clean and reapply	Not Applicable
		Jointiength	3	water	sealant in selected locations.	
				andtrappingincompressible	Within 7 days	
				material.	•	
				Severe; w > 3 mm	Clean, widen and	
			5	negligible protection against	reseal the joint.	
				ingress ofwater and trapping incompressible material.	Within 7 days	
12	Spalling of Joints	w = width or	20	incompressible material.	No action.	
12	phannig or joints	vv – wiatii Oi	ilo.	ivii, iidt disternible	ivo action.	

		Measured	Degree		Repair Action	
Sr.No.	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2
		either side of the	1	w < 10 mm	Apply low viscosity	
		joint L = length of	f		epoxy resin/ mortai	•
		spalled portion (as	52	w = 10 - 20 mm, L < 25%	in crackedportion.	
		% joint length)			Within 7 days	
			3	w = 20 - 40 mm, L > 25%	Partial Depth Repair	
			5	w = 20 - 40 IIIII, L > 23%	Within 15 days	
					30 - 50 mm deep, h =	:
			4	w = 40 - 80 mm, L > 25%	w + 20% of w, withir	
					30 days	
					50 - 100 mm deep	
			5	w > 80 mm, and L > 25%	repair. H = w + 20% of	Not Applicable
				W > 30 mm, and E > 2370	w.	
					Within 30 days	
		f = difference o	0	not discernible, < 1 mm	No action.	No action.
			1	f < 3 mm		
			2	f = 3 - 6 mm		Replace the slab as
					observe, take action	appropriate.
	Faulting (orStepping)		f		for diamondgrinding	
11 ≺	in Cracks or Joints	level	3	f = 6 - 12 mm	Diamond Grinding	Within 30days
			4	f= 12 - 18 mm	Raise sunken slab.	Replace the slab as appropriate.
					Strengthen subgrade	appropriate.
			5	f> 18 mm	and sub-base by	1
					groutingand raising	Within 30days
					Samen side	
			0	Nil, not discernible	Short Term	Long Term
		H =vertica		·	No Action	
14	Blow-up or Buckling	displacement from		h < 6 mm		
		·	2	h = 6 - 12 mm	Install Signs to Warr Traffic	
			3	h = 12 - 25 mm	within 7 days	

		Measured	Degree		Repair Action	
Sr.No	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2
			4	h > 25 mm	Full Depth Repair Within 30 days	•
			5	shattered slabs, i.e. 4 morepieces	or Replace broken slabs. Within 30 days	
			0 1	Not discernible, h < 5 mm h = 5 - 15 mm	No action.	
		H =negative vertical		h = 15-30 mm, Nos<20% joints	Install Signs to Warr Traffic within 7 days	
15	Depression	displacement from normal profile L=length		h = 30 - 50 mm h > 50 mm or > 20% joints	Strengthen subgrade. Reinstate pavemen	Not Applicable
			5	h > 100 mm	If L < 20 m. Within 30 days	
			0	Not discernible. h < 5 mm	Short Term	Long Term
			1	h = 5 - 15 mm	No action. Follow up.	
		h = positive vertical	2	h = 15 - 30 mm, Nos <20% joints	Install Signs to Warr	1
16	Heave	displacement from	3	h = 30 - 50 mm	Trafficwithin 7 days	
10	licave	normal profile.	4	h > 50 mm or > 20% joints	Stabilise subgrade	
		L = length	5	h > 100 mm	Reinstate pavementat normal level in length < 20 m. Within 30 days	f
		H =vertical	0	h < 4 mm	No action	
17	Bump	H =vertical displacement from normalprofile	1	h = 4 - 7 mm	Grind, in case of new construction within 7 days	Construction Limit for New Construction.

		NADSCHILD	Degree		Repair Action	,	
Sr.No.	Type of Distress	Parameter	of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2	
			3	h = 7 - 15 mm	of ongoing Maintenance within 15 days	Replace in case of new construction. Within 30days	
			5	h > 15 mm	Full Depth Repair. Within 30 days	Full Depth Repair. Within 30days	
			0	Nil, not discernible < 3mm	Short Term	Long Term	
			4	,	No action.		
18	Lane toShoulder Drop-off	f = difference o	2 f	f = 3 - 10 mm f = 10 - 25 mm	Spot repair of shoulder within 7 days		
10			3	f = 25 - 50 mm		For any 100 m stretch	
			4	f = 50 - 75 mm	-Fill up shoulder	Reconstruct shoulder, if	
			5	f > 75 mm	within 7 days	affecting 25% or more ofstretch. Within 30days	
Draina	nge						
			0	not discernible	No Action		
		quantity of fines	1 to 2	slight/ occasional Nos < 10%	Repair cracks and joints Without delay.	Inspect and repair sub- drainage at distressed	
		and water expelled through open	3 to 4	appreciable/ Frequent 10 25%	-Lift or jack slab within 30 days.	drainage at distressed sections and upstream.	
19	Pumping	joints and cracks Nos Nos/100 m stretch	5	abundant,crack developmen >25%	Repair distressed pavement sections tStrengthen subgrade and subbase. Replace slab. Within 30 days		
20	Ponding	Ponding on slabs	l	Nodiscernible problem	No action.		
20	i Onwing	due to blockage of	f3 to 4	Blockages observed in drains	,Clean drains etc.	Action required to stop	

	M	Measured of Parameter	Degree		Repair Action			
Sr	.No.Type of Distress		of Severity	Assessment Rating	For the case d < D/2	For the case d > D/2		
Ī	dr	rains		but water flowing	within 7 days, Follow	water damaging		
					up	foundation within 30		
			5	Ponding, accumulation of water observed	-do-	days.		

Table -3: Maintenance Criteria for Safety Related Items and Other Furniture Items:

Asset Type	Performanc e Parameter	Level of S	ervice (L	.OS)	Frequency of Measureme nt		Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
Highway	Availability of Safe Sight Distance	Design Speed, kmph	of sight doe ar ut. Desirab e Winimu m Sight	safe listance vailable Safe Stoppi ng g Sight Distan		Manual Measurements with Odometer along with video/ image backup	deficiency: Removal of obstruction/	ed by temporary es, temporary ucture or design improvement of earliest Speed suitable traffics transverse bar shall be applied	IRC: SP 84- 2019
Pavement Marking	Wear	<70% remaining	of r	marking	Bi- Annually	Visual Assessment as per Annexure-F of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect within	IRC:35-2015

Asset Type	Performanc e Parameter	Level of Service	e (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
							2months-	
		During expections of the During expection of the During expections of t	Cement m ² /lux d- x	Monthly	AsperAnnexure-D of IRC:35- 2015	Re - painting	Cat-1 Defect — within 24 hours Cat-2 Defect — within 2 months	IRC:35- 2015
	Night Ti me Visibility	Initial and Performancefor Retro reflectivit nighttime: Desig (RL)Retro ity Speed (mcd/m² Initial (7 days) Up to 65 65 100	ty during oReflectiv	Ri-∆nnually	As per Annexure-E of IRC:35-2015	Re - painting	Cat-1 Defect — within 24 hours Cat-2 Defect — within 2 months	IRC:35-2015

Asset Type	Performanc e Parameter	Level	of Service	(LOS)	Frequency of Measureme nt	Testing N	/lethod	Recommende Remedial mea		Time limit for Rectification	Specificatio ns and Standards
		Abov e 100 Initial	350 and 1	150 Minimum							
				_							
		Initial reflect mcd/n Minim Level:	7 day civity: n ² /lux num 1 50 mcd/m	100 Threshold n ² /lux							
	Skid Resistance	SkidRe Initial Min. T *Note considurban, condit the pedesibay, b interse transv	mance esistance: (7days): hreshold: sha lered /city ion enco location trian cross us stop, crection de	44BPN II be under traffic mpassing s like sings, bus ycle track	Bi-Annually	As Annexure	per e-G of IRC:35-2015			Within 24 hours	IRC:35-2015
Road Signs			and Po	sition as	Daily	Visual	with video/imag	ge Improvement	of shape,	, 48 hours in	IRC:67-2012

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt		Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
		per IRC: 67- 2012. Signboard should be		I	in case if shapeisDamaged.	case of Mandatory	
		clearly visible for the design speed of the section.			Relocation asper requirement change of	Signs, Cautionary and Informatory	
	Retro reflectivity	As per specifications in IRC:67-2012	Bi-Annually	Testing of each Signboard using Retro Reflectivity Measuring Device. In accordance with ASTM D 4956-09.		Signs (Single and Dual post signs) 15 Days in case of Gantry/Cantilev er Sign boards 48 hours in case of Mandat ory Signs, Cautionary and Informatory Signs (Single and Dual postsigns) 1 Month in case of Gantry/Cantilev er Sign boards	RC:67-2012

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt		Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
		As per IRC 86:2018 depending upon type of Kerb	Bi-Annually	Use of distance measuring tape	Raising Kerb Height	Within 1 Month	IRC 86:2018
Kerb	Kerb	Functionality: Functioning of Kerb painting as intended	Daily	Visual with video/image backup	Kerb Repainting	Within 7-days	IRC 35:2015
	Reflective Pavement Markers (Road Studs)	Numbers and Functionality as per specifications in IRC:SP:84-2019 and IRC: 35-2015, unless specified in Schedule-B.	Daily	Counting	New Installation	Within 2 months	IRC:SP:84- 2019,IRC:35 - 2015
Other Road Furniture	Pedestrian Guardrail	Functionality: Functi oning of guardrail asintended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:SP:84- 2019
	I rattic Safe	Functionality: Functioning of Safety Barriers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84- 2014, IRC:119- 2015
	reatment	Functionality: Functioning ofEnd Treatment as intended	Daily	Visual with video/image	Rectification	Within 7 days	IRC:SP:84- 2019,
	Traffic Safe ty Barriers			backup			IRC:119- 2015
	Attenuators	Functionality: Functi	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP- 2014,

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
		oning of Attenuators asintended					IRC:119- 2015
		Functionality: Functioning of Guard Posts and Delineators as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:79-2019
	0	Overhead sign structure shall be structurally adequate	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:67-2012
	Rlinkers	Functionality: Functioning of Traffic Blinkers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84- 2019
	Highway Lights	Illumination: Minimum 40 Lux illumination on the road surface	'	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84- 2019
nt de la constant		No major failure in the lighting system		-	Rectification of failure	24 hours	IRC:SP:84- 2019
Highway Lighting		No minor failure in the lighting system	Monthly	-	Rectification of failure	8 hours	IRC:SP:84- 2019
System	Toll	Minimum 40 Lux illumination on the road surface		The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84- 2019
	Plaz a Canopy Lights	INIA MAIAR/MINAR TAIIIIRA	Daily	-	Rectification of failure	8 hours	IRC:SP:84- 2019
	Obstruction in a minimum			Visual with video/image backup	Removal of trees	Immediate	IRC:SP:84- 2019

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
Trees and Plantation including median plantation	head-room of 5.5 m above carriageway or obstruction in visibility						
	Deterioratio n in health of trees and bushes	Health of plantation shall be as per requirement of specifications & instructions issued by Authority from time to time	Daily	Visual with video/image backup	Timely watering and treatment. Or Replacement of Trees and Bushes.	Within 90 days	IRC:SP:84- 2019
	structures	Sight line shall be	Daily	Visual with video/image backup	Removal of Trees	Immediate	IRC:SP:84- 2019
	Cleaning of toilets	-	Daily	-	-	Every 4 hours	
Rest Areas	Defects in electrical, water	-	Daily	-	Rectification	24 hours	

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
	an d sanitary installations						
Other Project Facilities and Approach roads	Approach Ro pedestrian f bus-bays,bus shelters, cat Posts, Medic	acilities, truck lay-bys, - tle crossings, Traffic Aid	Daily	_	Rectification	15 days	IRC:SP:84- 2019
	Free waterway/ unobstructe d flowsection	85% of culvert normal flow area to available.	2 times in a year (before and after rainy season)	Engineer as per IRC SP: 35-	removal of bushes and	before onset of monsoon and	IRC:5-2015,
Pipe/box/sl ab culverts	Leak-proof expansion joints if any Structurally sound	No leakage through expansionjoints Spalling of concrete not more	Bi-Annually Bi-Annually	Physical inspection of expansion joints as per IRC SP: 35- 1990 if any, for leakage strains on walls at joints. Detailed inspection of all components of culvert as	Fixing with sealant suitably Repairs to spalling,	30 days or before onset of rains whichever comes earlier	IRC: SP:40- 2019 and IRC SP:69- 2011 IRC: SP:40- 2019

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Remedial measures	Time limit for Rectification	Specificatio ns and Standards
		than 0.25 sqm Delamination of concrete not more than 0.25 sq.m. Cracks wider than 0.3 mm not more than 1m aggregatelength		per IRC SP:35-1990 and recording the defects	rusting shall be followed as perIRC: SP:40-2019.		an d MORTH Specificatio n s claus e 2800
	Protection works in good	Damaged of rough stone apron or bank revetment not more than 3 sqm, damage to solid apron	year (before and	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons andpitching	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40- 2019and IRC:SP:13- 2004
K()KS	Riding quality or user comfort	No pothole in wearing coat on bridge deck	Daily	Visual inspection as per IRC SP:35-1990	Repairs to BC or wearing coat	15 days	MORT&H Specificatio n 2811
Bridge -	Bumps	No bump at expansionjoint	Daily	Visual inspection as per IRC SP:35- 1990	on approach slab in case of settlement to approach embankment	15 days	MORT&H Specificatio n 3004 & 2811.
Super	User safety	No damaged or missing	Daily	Visual inspection anddetailed	Repairs and replacement	3days	IRC: 5-2015,

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
Structure	(condition of crash barrier andguardrail	•		condition survey as per IRC SP: 35- 1990.	of safety barriers as the case may be		IRC SP: 84- 2019and IRC SP: 40- 2019.
	nt Spalling of concrete Delaminatio n	Not more than 0.25 sq.m Not more than 0.50 sq.m Not more than 0.50 sq.m Not more than 1m total length	Bi- Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge InspectionUnit Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge InspectionUnit	with anti-corrosive coating before carrying out the repairs to affected concrete portionwith epoxy mortar,	15 days	IRC SP: 40-2019 an d MORTH Specificatio n 1600. IRC SP: 40-2019 an d MORTH Specificatio n 2800.
	Rainwater seepage through deck slab	Leakage - nil	Quarterly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge InspectionUnit	Grouting of deck slab at leakageareas, waterproofi		MoRTH specification s 2600 & 2700.
	Deflection		Once in	Load test method	Carry outmajor		

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt		Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
	due to permanent loads and live loads	Within design limits.	Every 10 Years for spans more than 40 m		rehabilitation works on bridge to retain original design loadscapacity		IRC SP: 51- 2015.
	Vibrations in bridge deck due to moving trucks	Frequency of vibrations shall not be more than 5 Hz	Once in every 5 years for spans more than 30m and Every 10 Years for spans between 15 to 30 m	Laser displacement sensors	Strengthening structure of super	4 months	AASHTO LRFD specification s
	Leakage in Expansion joints	No damage to elastomeric sealant compound in strip seal expansion joint, no leakage of rain water through expansion joint in case of buried and asphalt plug and copper stripjoint.			Replace of expansionjoint	15 days	MORTH specification s 2600 and IRC SP: 40-2019.
	strip seal	No dust debris expansion or in joint gap.	Monthly	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge InspectionUnit	light gapsthoroughly	3 days	MORTH specification s 2600 and IRC SP: 40-

Asset Tyne	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt		Recommended Remedial measures	Time limit for Rectification	Standards
	joint						2019.
		No down take pipe missing/broken below soffit of the deck slab. No silt, debris, clogging of drainage spout collection chamber.		Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge InspectionUnit	taka ninas with a	3 days	MORTH specification 2700.
		steel	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge InspectionUnit	tosubstructureby grouting/guniting and micro concretingexpen ding on type of defect noticed	30 days	IRC SP: 40- 2019 and MORTH specification 2800.
	Bearings	Delamination of bearing reinforcement not	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using	In case of failure of even one bearing on any	3 months	MORTH specification

Asset Type	Performanc e Parameter	Level of Service (LOS)	Frequency of Measureme nt	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specificatio ns and Standards
		more than 5%, cracking or tearing of rubber not more than 2 locations per side, no rupture ofreinforcement or rubber		Mobile Bridge InspectionUnit	pier/abutment, all the bearings on that pier/abutment shall be replaced, in order to get uniform load transfer on tobearings.		2810andIRC SP: 40- 2019.
Bridge Foundations	around	Scouring shall not be lower than maximum scour level for the bridge	Bi-Annually	Condition survey and visualinspection as per IRC SP:35-1990 UsingMobile Bridge Inspection Unit. In case of doubt, use Underwater camera for inspection of deep wells inmajor Rivers.	Suitable protection works around pier/abutment		IRC SP: 40- 2019,IRC 83-2014, MORTH specification 2500
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3	(before and	Condition survey as per IRC SP:35- 1990	Repairs todamaged aprons andpitching.	30 days after defect observation or 2	IRC: SP 40- 2019 and IRC: SP: 13- 2004.
		sq.m, damage to solidapron (concrete apron) not morethan1 sq.m				weeks before onset of rainy season whicheveris earlier.	

Note: Any Structure during the entire contract period which is found that does not complies with all requirements of this Table will be prepared, rehabilitated or even reconstructed under the scope of thecontractor.

Table 4: Maintenance Criteria for Hill Roads

In addition to above, for hill roads the following provisions for maintenance is also to done.

	Hill Roads	
(i)	Damage to Retaining wall/ Breast wall	7 (Seven) days
(ii)	Landslides requiring clearance	12 (Twelve) hours
(iii)	Snow requiring clearance	24 (Twenty-Four) hours

Note: For all tables 1 to 5 above, latest BIS & IRC standards (even those not indicated herewith) along with MoRT&H specifications shall be binding for all maintenance activities.

A. FlexiblePavement

	Nature of Defect or deficiency	Time limit for repair/ rectification
(b)	Granular earth shoulders, side slopes, drains andculverts	
(i)	Variation by more than 1 % in the prescribed slope of	1
	camber/cross fall (shall not be less than the camber on the	
,\	main carriageway)	7/
	Edge drop at shoulders exceeding 40 mm	7 (seven) days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 (thirty) days
(iv)	Rain cuts/gullies in slope	7 (seven) days
(v)	Damage to or silting of culverts and side drains	7 (seven) days
(vi)	Desilting of drains in urban/semi- urban areas	24 (twenty-four) hours
(vii)	Railing, parapets, crash barriers	7 (seven) days (Restore immediately if causing safety hazard)
(c)	Roadside furniture including road sign and pavementmarking	ng
(i)	Damage to shape or position, poor visibility or loss of retro- reflectivity	48 (forty-eight) hours
(ii)	Painting of km stone, railing, parapets, crash barriers	As and when required/ Once every year
(iii)	Damaged/missing signs road requiring replacement	7 (seven) days
(iv)	Damage to road mark ups	7 (seven) days
(d)	Roadlighting	
(i)	Any major failure of the system	24 (twenty-four) hours
(ii)	Faults and minor failures	8 (eight) hours
(e)	Trees and plantation	
(i)	Obstruction in a minimum head- room of 5 m above	24 (twenty-four)hours
	carriageway or obstruction in visibility of road signs	
	Removal of fallen trees from carriageway	4 (four) hours
	Deterioration in health of trees and bushes	Timely watering and treatment
	Trees and bushes requiringreplacement	30 (thirty) days
(v)	Removal of vegetation affecting sight line and road structures	15 (fifteen) days
(f)	Rest area	
(i)	Cleaning of toilets	Every 4 (four) hours
(ii)	Defects in electrical, water and sanitary installations	24 (twenty-four) hours

(g)	[TollPlaza]	
(h)	Other Project Facilities and Approach roads	
(i)	Damage in approach roads, pedestrian facilities, truck lay- byes, bus-bays, bus-shelters, cattle crossings, [Traffic Aid Posts, Medical Aid Posts] and service roads	
(ii)	Damaged vehicles or debris on the road	4 (four) hours
(iii)	Malfunctioning of the mobilecrane	4 (four) hours
Brid	-	
(a)	Superstructure	
(i)	Any damage, cracks, spalling/ scaling Temporarymeasures Permanentmeasures	within 48 (forty-eight) hours within 15 (fifteen) days or as specified by the Authority's Engineer
(b)	Foundations	
(i)	Scouring and/or cavitation	15 (fifteen) days
(c)	Piers, abutments, return walls and wingwalls	
(i)	Cracks and damages including settlement and tilting, spalling, scaling	30 (thirty) days
(d)	Bearings (metallic) ofbridges	
(i)	Deformation, damages, tilting or shifting of bearings	15 (fifteen) days Greasing of metallic bearings once in a year
(e)	Joints	
(i)	Malfunctioning of joints	15 (fifteen) days
(f)	Otheritems	
(i)	Deforming of node in electomeric hearings	7/
1	Deforming of pads in elastomeric bearings	7 (seven) days
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts,	3 (three) days
	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	3 (three) days
	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety)
	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and	3 (three) days 3 (three) days (immediately within 24 hours if posing danger
(iii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety)
(iii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers Rain-cuts or erosion of banks of the side slopes of approaches Damage to wearing coat	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety) 7 (seven) days
(iii) (iv)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers Rain-cuts or erosion of banks of the side slopes of approaches Damage to wearing coat Damage or deterioration in approach slabs, pitching.	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety) 7 (seven) days 15 (fifteen) days 30 (thirty) days
(iii) (iv) (v) (vi) (vii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers Rain-cuts or erosion of banks of the side slopes of approaches Damage to wearing coat Damage or deterioration in approach slabs, pitching apron, toes, floor or guidebunds Growth of vegetation affecting the structure or obstructing the	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety) 7 (seven) days 15 (fifteen) days 30 (thirty) days
(iii) (iv) (v) (vi)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers Rain-cuts or erosion of banks of the side slopes of approaches Damage to wearing coat Damage or deterioration in approach slabs, pitching apron, toes, floor or guidebunds Growth of vegetation affecting the structure or obstructing the waterway	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety) 7 (seven) days 15 (fifteen) days 30 (thirty) days
(iii) (iv) (v) (vi) (vii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes Damage or deterioration in kerbs, parapets, handrails and crash barriers Rain-cuts or erosion of banks of the side slopes of approaches Damage to wearing coat Damage or deterioration in approach slabs, pitching apron, toes, floor or guidebunds Growth of vegetation affecting the structure or obstructing the waterway HillRoads	3 (three) days 3 (three) days (immediately within 24 hours if posing danger to safety) 7 (seven) days 15 (fifteen) days 30 (thirty) days

[Note: Where necessary, the Authority may modify the time limit for repair/rectification, or add to the nature of Defect or deficiency beforeissuing the bidding document, with the approval of the competent authority.]

Schedule - F

(See Clause 4.1 (vii) (a))

Applicable Permits

1. Applicable Permits

- (i) The Contractor shall obtain, as required under the Applicable Laws, the following ApplicablePermits:
 - (a) Permission of the State Government for extraction of boulders from quarry;
 - (b) Permission of Village Panchayats and Pollution Control Board for installation ofcrushers;
 - (c) Licence for use of explosives;
 - (d) Permission of the State Government for drawing water fromriver/reservoir;
 - (e) Licence from inspector of factories or other competent Authority for setting up batchingplant;
 - (f) Clearance of Pollution Control Board for setting up batchingplant;
 - (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphaltplant;
 - (h) Permission of Village Panchayats and State Government for borrow earth; and
 - (i) Any other permits or clearances required under ApplicableLaws.
- (ii) Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority in accordance with the provisions of this Agreement.

Schedule - G

(See Clauses 7.1 and 19.2)

Annex-I

(See Clause 7.1)

Form of Bank Guarantee

[Performance Security/Additional Performance Security]

[MD,National Highways & Infrastructure Development Corporation Limited, New Delhi] WHEREAS:

- (A) ____[name and address of contractor] (Hereinafter called the "Contractor") and [name and address of the authority], (hereinafter called the "Authority") have entered into an agreement (hereinafter called the "Agreement") for the Construction & up-gradation to 2-Lane with paved shoulder from Km 80+675 (Start of Kishtwar Bypass i.e., Existing km 97+075) to Km 95+550 (End of Helmet Top i.e., Existing km 123+035) of length 14.875 Km including Link Road from Km 0+000 to Km 1+871 of Length (1+871) Total Length = 16+746 Km on Khellani Kishtwar Mode on Engineering, Procurement and Construction (the "EPC") basis, subject to and in accordance with the provisions of the Agreement
- (C) We, through ourbranchat (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

- 1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor's obligations during the {Construction Period/ Defects Liability Period and Maintenance Period} under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
- 2. AletterfromtheAuthority,underthehandofanofficernotbelowtherankof[General Manager in the National Highways & Infrastructure Development Corporation Ltd], that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.
- 3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank,

whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

- 4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
- 5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfilment and/or performance of all or any of the obligations of the Contractor contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any suchlaw.
- 6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfilment, compliance and/or performance of all or any of the obligations of the Contractor under the Agreement.
- 7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this GuaranteeallrightsoftheAuthorityunderthisGuaranteeshallbeforfeitedandthe Bank shall be relieved from its liabilities hereunder.
- 8. The Guarantee shall cease to be in force and effect on ****\$. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.
- 9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
- 10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
- 11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

SI	gned	and	sealed	this		day	Οt	,	20)	at		
----	------	-----	--------	------	--	-----	----	---	----	---	----	--	--

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature) (Name) (Designation) (Code Number) (Address)

NOTES:

(i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.

The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex – II (Schedule - G)

(See Clause 19.2)

Form for Guarantee for Advance Payment

[National Highways & Infrastructure Development Corporation Limited, New Delhi] WHEREAS:

- (A) [name and address of contractor] (hereinafter called the "Contractor") has executed an agreement (hereinafter called the "Agreement") with the [name and address of the authority], (hereinafter called the "Authority") for Construction & up-gradation to 2-Lane with paved shoulder from Km 80+675 (Start of Kishtwar Bypass i.e., Existing km 97+075) to Km 95+550 (End of Helmet Top i.e., Existing km 123+035) of length 14.875 Km including Link Road from Km 0+000 to Km 1+871 of Length (1+871) Total Length = 16+746 Km on Khellani Kishtwar Chattroo Khanabal section of NH-244 in the Union Territory of Jammu and Kashmir on Engineering, Procurement and Construction (the "EPC") basis, subject to and in accordance with the provisions of the Agreement.
- (B) In accordance with Clause 19.2 of the Agreement, the Authority shall make to the Contractor an interest bearing @Bank Rate + 3% advance payment (herein after called "Advance Payment") equal to 10% (ten percent) of the Contract Price; and that the Advance Payment shall be made in two instalments subject to the Contractor furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of such instalment to remain effective till the complete and full repayment of the instalment of the Advance Payment as security for compliance with its obligations in accordance with the Agreement. The amount of {first/second} instalment of the Advance Payment is Rs. ----- cr. (Rupees crore) and the amount of this Guarantee is Rs. cr. (Rs cr) (the "Guarantee Amount").
- (C) We,(the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows: The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

- 1. A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways & Infrastructure Development Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for the repayment of the instalment of the Advance Payment under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, not withstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.
- 2 In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
- 3. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.

⁵ The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment.

- 4. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
- 5. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Advance Payment.
- 6 Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
- 7. The Guarantee shall cease to be in force and effect on ****\$ unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.
- 8 The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writingand declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
- 9. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
- 10. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

	Signed	and	sealed	this	d	ay of	,	20		at	
--	--------	-----	--------	------	---	-------	---	----	--	----	--

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature) (Name) (Designation) (Code Number) (Address)

NOTES:

- (i) Thebankguaranteeshouldcontainthename, designation and code number of the officer(s) signing the guarantee.
- \$ Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex - III

(Schedule - G) (See Clause 7.5.v)

Form for Guarantee for Withdrawal of Retention Money

National Highways & Infrastructure Development Corporation Limited New Delhi

WHEREAS:

- (A) [name and address of contractor] (hereinafter called the "Contractor") has executed an agreement (hereinafter called the "Agreement") with the [name and address of the authority], (hereinafter called the "Authority") for the construction of the ***** section of [National Highway No. **] on Engineering, Procurement and Construction (the "EPC") basis, subject to and in accordance with the provisions of the Agreement.
- (B) In accordance with Clause 7.5.3 of the Agreement, the Contractor may withdraw the retention money (hereinafter called the "**Retention Money**") after furnishing to the Authority a bank guarantee for an amount equal to the proposed withdrawal.
- NOW, THEREFORE, the Bank hereby unconditionally and irrevocably guarantees and affirms as follows:
- 1. The Bank hereby unconditionally and irrevocably undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
- 2. A letter from the Authority, under the hand of an officer not below the rank of General Manager in the National Highways & Infrastructure Development Corporation Limited (NHIDCL), that the Contractor has committed default in the due and faithful performance of all or any of its obligations for under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final, and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

- 3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
- 4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
- 5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Retention Money and any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
- 6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Retention Money.
- 7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
- 8. The Guarantee shall cease to be in force and effect 90 (ninety) days after the date of the Completion Certificate specified in Clause 12.4 of the Agreement.
- 9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
- 10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorized to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

- 11. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
- 12. This guarantee shall also be operatable at our.......Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.
- 13. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHIDCL, details of which is as under:

S.No	Particulars	Details
1	Name of Beneficiary	National Highways & Infrastructure Development
		Corporation Limited
2	Beneficiary Bank Account No.	90621010002610
3	Beneficiary Bank Branch	IFSC SYNB0009062
4	Beneficiary Bank Branch	Transport Bhawan, New Delhi
	Name	
5	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank) transport Bhawan,
		1st Parliament Street, New Delhi-110001

Signed and sealed this day of, 20..... at

SIGNED, SEALED AND DELIVERED For and on behalf of the Bank by:

(Signature) (Name)

(Designation) (Code Number) (Address) NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Schedule - H

See Clauses10.1 (iv) and 19.3

Contract Price Weightages

- 1.1 The Contract Price for this Agreement is **Rs...... Crores**
- 1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specifiedbelow:

ltem	Weightage in percentage to the Contract Price	Stage of Payment	Percentage Weightage		
1	2	3	4		
		B.1 - Reconstruction/New 2-lane realignment/bypass (Flexible pavement)			
		(1) Earthwork up to top of sub-grade	44.158%		
		(2) Sub-Base Course	10.084%		
		(3) Non-Bituminous Base Course	9.246%		
		(4) Bituminous Base Course	10.725%		
Road works		(5) Wearing Coat	6.728%		
including	19 2079/	C.1 - Reconstruction/New service road/Link Road (Flexible pavement)			
culverts, widening and repair	18.297%	1) Earthwork up to top of Sub-grade	2.011%		
of culverts.		2) Sub-Base Course	0.768%		
or curverts.		3) Non -Bituminous Base Course	0.796%		
		4) Bituminous Base Course	0.935%		
		5) Wearing Coat	0.584%		
		D - Re-Construction and New culverts	0.30470		
		on existing road, realignments,			
		bypasses:			
		(1) Culverts (length < 6m)	13.965%		
		A.1-Widening and repair of minor			
		bridges (length > 6m and < 60m)			
		Minor Bridges	0.000%		
		A.2- New minor bridges/ Viaduct			
Minor Bridges/	4.669%	(i) Foundation +Sub- Structure: On completion of the foundation work including foundations for wing and return walls, abutments, piers up to	77.754%		
Underpasses/Viaduct	4.50370	the abutment/pier cap.			
		(ii) Super-structure: On completion of the superstructure in all respects including wearing coat, bearings, expansion joints, handrails, crash	20.546%		
		barriers, road signs & markings, tests on completion etc. complete in all respect.	20.540/0		

1	2	(iii) Approaches: On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use. A.1- Widening and repairs of Major Bridges A.2- New Major Bridges MCW & Link Road	1.700% 0.000%	
		approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use. A.1- Widening and repairs of Major Bridges A.2- New Major Bridges MCW & Link Road		
		A.1- Widening and repairs of Major Bridges A.2- New Major Bridges MCW & Link Road	0.000%	
		Road		
		1) Foundation	17.377%	
		2) Sub-structure	15.267%	
		3) Super-structure (including bearings)	53.606%	
		4) Wearing Coat including expansion joints	0.929%	
		5) Miscellaneous Items like handrails, crash barriers, road markings etc.)	0.876%	
		6) Wing walls/return walls	0.000%	
Major Bridge (Length >		7) Guide Bunds, River Training works etc.	0.000%	
60m) works and ROB/RUB/Elevated sections/Flyovers	49.844%	8) Approaches (including Retaining walls, stone pitching and protection works)	0.100%	
including Viaducts if any		C.2- New New Elevated Section/ Flyovers/ Grade Separators/Viaduct		
		1) Foundation	2.378%	
		2) Sub-structure	2.195%	
		3) Super-structure (including bearings)	6.823%	
		4) Wearing Coat including expansion joints	0.146%	
		5) Miscellaneous Items like handrails, crash barriers, road markings etc.)	0.271%	
		6) Wing walls/return walls	0.000%	
		7) Approaches (including Retaining walls/RE Wall, stone pitching and protection works)	0.032%	
		(i) Toll plaza		
		(ii) Roadside drains	4.357%	
		(iii) Road signs, markings, km stones, safety devices,	4.966%	
Other Works	27.190%	(iv) Project Facilities a) Bus bays//Bus Stop	0.052%	
		b) Truck lay-byes	0.000%	
		c) Rest area d) Utility Duct	0.000%	

Item	Weightage in percentage to the Contract Price	Stage of Payment	Percentage Weightage
1	2	3	4
		v) Others i.e., Environment & Muck Disposal Management	
		a) Construction of suitable engineering structures like Breast/Gabion Wall etc.	3.498%
		b) EMP	0.670%
		c)Road side Plantation	0.834%
		(vi) Junctions	0.491%
		(vii) High Mast Lighting & Electric Pole	0.859%
		(ix) Protection works i.e. Retaining wall/Toe wall/Gabion wall etc.	
		a) Retaining wall	16.614%
		b) Gabion wall	20.933%
		c) Breast wall	25.044%
		(d)Special Slope Stabilization Works (Site suitable engineering measures such as shotcrete with wire mesh & rock bolting/soil nailing/bio engineering measures such as hydro seeding etc.	11.966%
		(ix) Safety and traffic management	
		during construction a)Temporary of Diversion existing road portion including maintenance existing road	1.070%
		b) clearance of land slide & snow	0.312%

1.3 Procedure of estimating the value of work done

1.3.1 Road works

Procedure for estimating the value of road work done shall be as follows:

Table 1.3.1

Stage of Payment	Percentage - Weightage	Payment Procedure
B.1 - Reconstruction/New 2-lane realignment/bypass (Flexible pavement)		Unit of measurement is linear
(1) Earthwork up to top of the sub-grade	44.158%	length. Payment of each stage shall
(2) Sub-base Course	10.084%	be made on pro rata basis on
(3) Non-Bituminous Course	9.246%	completion of a stage in full length
(4) Bituminous Base Course	10.725%	or 10% of total length, whichever is
(5) Wearing Coat	6.728%	less.
6) Widening and repair of culverts	0.000%	
C.1 - Reconstruction/New service road/link road (Flexible pavement)		
(1) Earthwork up to top of the sub-grade	2.011%	Unit of measurement is linear
(2) Sub-Base Course	0.768%	length. Payment of each stage shall
(3) Non-Bituminous Course	0.796%	be made on pro rata basis on

Stage of Payment	Percentage - Weightage	Payment Procedure	
(4) Bituminous Base Course	0.935%	completion of a stage in full length	
(5) Wearing Coat	0.584%	or 5% of total length, whichever less.	
D - Re-Construction and New culverts onexisting road, realignments, bypasses including Link Road			
(1) Culverts (length < 6m)	13.965%	Cost of each culvert shall be determined on pro rata basis with respect to the total number of culverts. Payment shall be made on the completion of each culverts.	

For example, if the total length of bituminous work to be done is 100 km, the cost per km of bituminous work shall be determined as follows:

Cost per km = $P \times W = P \times W$

Where P= Contract Price

L = Total length in km

Similarly, the rates per km for other stages shall be worked out accordingly.

Note: The length affected due to law and order problems or litigation during execution due to which the Contractor is unable to execute the work, may be deducted from the total project length for payment purposes. The total length calculated here is only for payment purposes and will not affect and referred in other clauses of the Contract Agreement.

1.3.2 Minor Bridges and Underpasses/Overpasses.

Procedure for estimating the value of Minor bridge and Underpasses/Overpasses shall be as stated in table 1.3.2:

Table 1.3.2

Stage of Payment	<u>Weightage</u>	Payment Procedure		
1	2	3		
A.1-Widening and repair of minor bridges (length > 6m and < 60m)	0.000%	Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length of the minor bridges. Payment shall be made on the completion of		
		widening & repair works of a minor bridge.		
A.2- New minor bridges				
(i) Foundation +Sub- Structure: On completion of the foundation work including foundations for wing and return walls, abutments, piers up to the abutment/pier cap.	77.753%	(i) Foundation +Sub-Structure: Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length (m) of the minor bridges. Payment against foundation + sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation+ substructure of each bridge		

Stage of Payment	<u>Weightage</u>	Payment Procedure	
1	2	3	
		subject to completion of at least two foundations along with sub-structure up to abutment/pier cap level of each bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.	
(ii) Super-structure: On completion of the superstructure in all respects including wearing coat, bearings, expansion joints, handrails, crash barriers, road signs & markings, tests on completion etc. complete in all respect.	20.546%	(ii) Super-structure: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of super-structure of at least one span in all respects as specified in the column of "Stage of Payment" in this sub-clause.	
(iii) Approaches: On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect and fit for use.	1.700%	(iii) Approaches: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of approaches in all respect as specified in the column of "Stage of Payment" in this subclause.	

1.3.3 Major Bridge works, ROB/RUB and Structures.

Procedure for estimating the value of Major Bridge works, ROB/RUB and Structures shall be as stated in table 1.3.3:

Table 1.3.3

Stage of Payment	Weightage	Payment Procedure	
1	2	3	
A.2- New Major Bridges including link			
road			
(i) Foundation	17.377%	(i) Foundation: Cost of each Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge. Payment against foundation shall be made on prorata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of at least two foundations of the major Bridge.	
		(ii) Sub-Structure:	
(::\ Cb. atmostone	45 2670/	Payment against Substructure shall be	
(ii) Sub-structure	15.267%	made on pro-rata basis on completion	
		of a stage i.e. not less than 25% of the	
		scope of substructure of the major	

Stage of Payment	<u>Weightage</u>	Payment Procedure
1	<u>vveigntage</u>	3
-	-	bridge subject to completion of at least two sub-structures of abutments/piers up to abutment/pier cap level of the major bridge.
		(iii) Wing walls/return walls:
(iii) Wing walls/return walls	0.000%	Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.
(iv) Super-structure: (including bearings)	53.606%	(iv) Super-structure: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of super-structure including bearings of at least one span in all respects as specified.
(v) Wearing Coat including expansion joints	0.929%	(v) Wearing Coat: Payment shall be made on completion of wearing coat including expansion joints complete in all respects as specified.
(v) Miscellaneous Items like handrails, crash barriers, road markings etc.	0.876%	(vi) Miscellaneous: Payments shall be made on completion of all miscellaneous works like handrails, crash barriers, road markings etc. complete in all respects as specified.
(vi) Guide Bunds, River Training works etc.	0.00%	(vii) Guide Bunds, River Training works: Payments shall be made on completion of all guide bunds/river training works etc. complete in all respects as specified.
(viii) Approaches (including Retaining walls, stone pitching and protection works)	0.099%	(viii) Approaches: Payments shall be made on completion of both approaches including stone pitching, protection works, etc. complete in all respects as specified.
C.2-New Elevated Section/Flyovers/ Grade Separators/Rotary/Viaduct		
(i) Foundation	2.378%	(i) Foundation: Cost of each Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridge.

Stage of Payment	Weightage	Payment Procedure	
1	2	3	
		Payment against foundation shall be made on prorata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of at least two foundations of the major Bridge.	
(ii) Sub-structure	2.195%	(ii) Sub-Structure: Payment against Substructure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of substructure of the major bridge subject to completion of at least two sub-structures of abutments/piers up to abutment/pier cap level of the major bridge.	
(iii) Super-structure (including bearings)	6.823%	(iii) Super-structure: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of super-structure including bearings of at least one span in all respects as specified.	
(iv) Wearing Coat including expansion joints	0.146%	(iv) Wearing Coat: Payment shall be made on completion of wearing coat including expansion joints complete in all respects as specified.	
5) Miscellaneous Items like handrails, crash barriers, road markings etc.)	0.271%	Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.	
6) Wing walls/return walls	0.000%	Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.	
7) Approaches (including Retaining walls, stone pitching and protection works)	0.032%	Payments shall be made on completion of all wing walls/return walls complete in all respects as specified.	

Note:

- (1) In case of innovate Major Bridge projects like cable suspension/cable stayed/ Extra Dozed and exceptionally long span bridges, the schedule may be modified as per site requirements before bidding with due approval of Competent Authority.
- (2) The Schedule for exclusive tunnel projects may be prepared as per site requirements before bidding with due approval of Competent Authority.

1.3.4 Other works.

Procedure for estimating the value of other works done shall be as stated in table 1.3.4.

Table 1.3.4

Stage of Payment	Weightage	Payment Procedure	
(i) Toll plaza	0.000%	Unit of measurement is each completed toll plaza. Payment of each toll plaza shall be made on pro rata basis with respect to the total of all toll plazas.	
(ii) Road-side drains (PCC drain & Catch Water)	4.357%	Unit of measurement is linear length in km./Nos./sqm Payment shall be made on	
(iii) Road signs, markings, km stones, safety devices,	4.966%	prorate basis on completion of a stage in lengthof not less than 10 % (ten per cen of the scope of work.	
(iv) Project Facilities			
a) Bus stop	0.052%	Payment shall be made on pro rata basis	
b) Truck lay-byes	0.000%	for completed facilities.	
c) Rest areas	0.000%		
d) Utility Ducts	8.334%	Payment shall be made on pro rata basis for completed facilities	
v) Environment & Muck Disposal Management			
a) Construction of suitable engineering structures	3.498%	On Completion of 20% of length in complete height as per the approved design & drawings.	
b) EnvironmentManagement Plan	0.670%	Payment shall be made on pro data bases	
c) Road side Plantation	0.834%	at half-yearly after complying all the condition of MoEF.	
(vi) Junctions	0.491%	Payment shall be made on Completion	
(vii) High Mast Lighting & Electric Pole	0.859%	Payment shall be made on Completion	
(viii) Protection works			
a) Retaining wall	16.614%		
b) Gabion wall	20.933%		
c) Breast wall	25.044%	Payment shall be made on pro rata basis	
(d) Special Slope Stabilization Works (Site suitable engineering measures such as shotcrete with wire mesh & rock bolting/ soil nailing/bio engineering measures such as hydro seeding	11.966%	on completion of a stage in a length of r less than 5% (Five per cent) of the to length	
(ix) Safety and traffic management during construction			
a)Temporary of Diversion existing road portion including maintenance existing road	1.070%	Every six monthly after duly certified the work by the AE as per Contractual requirement at site.	
b)clearance of land slide&snow	0.312%	Every six monthly after duly certified the work by the AE as per Contractual requirement at site.	

2. Procedure for payment for Maintenance

- 2.1 The cost for maintenance shall be as stated in Clause 14.1.1.
- Payment for Maintenance shall be made in quarterly instalments in accordance with the provisions of Clause 19.7.

Schedule - I

(See Clause 10.2 (iv))

Drawings

1. Drawings

In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

2. AdditionalDrawings

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.

Annex – I

(Schedule - I)

List of Drawings

- 1. The Project drawings, as defined in Clause 1.1, Definitions, Article 1, Definitions and Interpretation, Part-I: Preliminary, of the Contract Agreement shall consist:
 - (a) Working Drawings of all the components/elements of the Project as determined by Authority Engineer/Authority, and
 - (b) As-built drawings for the Project components/elements as determined by AE/Authority. As-built drawings shall be duly certified by Authority Engineer.
- 2. A minimum list of the drawings of the various components/elements of the Project and project facilities required to be submitted by the Contractor is given below:

A. BRIDGE

General Arrangement Drawing
Detailed Drawings of Structures/Bridges

B. ROAD (PLAN & PROFILE)

Plan & Profile

Cross Sections

Drawings of horizontal alignment, vertical profile and cross sections

Drawings of cross drainage works

Drawings of traffic diversion plans and traffic control measures

Drawings of road drainage measures

Drawings of typical details slope protection measures

Drawings of landscaping and horticulture

Drawings of street lighting

C. STANDARD DRAWINGS

Detail of Mandatory Regulatory Signs

Detail of Mandatory Regulatory Signs & Compulsory Direction Control and Other Signs

Detail of Informatroy Signs

Detail of Cautionary Signs-TS

Detail of cautionary warning signs

Detail of cautionary warning signs

Details of route marking (chevron marking)

Details of road marking

Details of directional signs

Details Toe drain

Details of pitching, filtermaterial, chute drain and energy dissipation basin-std

Details of double head metal beam crash barrier

Details for 200meter 1 km & km post

Detail for boundary stone & guard post

Drain retaining wall & kerb

Gabion wall

Schedule - J

(See Clause 10.3 (ii))

Project Completion Schedule

1. Project CompletionSchedule

During Construction period, the Contractor shall comply with the requirements set forth in this Schedule-J for each of the Project Milestones and the **Scheduled Completion Date**. Within 15 (fifteen) days of the date ofeach Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

2. ProjectMilestone-I

- (i) Project Milestone-I shall occur on the date falling on the 256th(TwoHundred and Fifty-Six) day from the Appointed Date (the "**Project Milestone-I**").
- (ii) Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for anamount not less than 10% (ten per cent) of the ContractPrice.

3. ProjectMilestone-II

- (i) Project Milestone-II shall occur on the date falling on the 438th (Four Hundred and Thirty-Eight) day from the Appointed Date (the "Project Milestone-II").
- (ii) Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 35% (thirty-five per cent) of the Contract Price and should have started construction of all bridges.

4. ProjectMilestone-III

- (i) Project Milestone-III shall occur on the date falling on the 620th(SixHundred&Twenty) day from the Appointed Date (the "Project Milestone-III").
- (ii) Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for anamount not less than 70% (seventy per cent) of the Contract Price and should have started construction of all project facilities.

5. Scheduled CompletionDate

- (i) The Scheduled Completion Date shall occur on the 730th(Seven Hundred and Thirty) day from the Appointed Date.
- (ii) On or before the Scheduled Completion Date, the Contractor shall have completed construction in accordance with this Agreement.

6. Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

Schedule - K

(See Clause 12.1 (ii))

Tests on Completion

1. Schedule forTests

- (i) The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10(ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- (ii) The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule-K.

2. Tests

A. Road and Bridge

- (i) Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include [***].
- (ii) Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a Network Survey Vehicle (NSV) fitted with latest equipments and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometre.
- (iii)Tests for bridges: All major and minor bridges shall be subjected to the rebound hammer and ultrasonic pulse velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Nondestructive Testing Techniques, at two spots in every span, to be chosen at random by the Authority's Engineer. Bridges with a span of 15 (fifteen) metres or more shall also be subjected to load testing.
- (iv) Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with Good Industry Practice, for determining the compliance of the Project Highway with Specifications and Standards, except tests as specified in clause 5, but shall include measuring the reflectivity of road markings and road signs; and measuring the illumination level (lux) of lighting using requisite testing equipment.

B. Other Tests

- (i) Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- (ii) Safety Audit: The Authority's Engineer shall carry out, or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

3. Agency for conductingTests

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

4. CompletionCertificate

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

5. The Authority Engineer will carry out tests with following equipment at his own cost in the presence of contractor's representative.

Sr.N	Key metrics of	Equipment to be used	Frequency of condition survey
0.	Asset		
1	Surface of defects	Network Survey	At least twice a year (As per survey
	pavement	Vehicle	months defined for the state basis
		(NSV)	rainy season)
2	Roughnessof	Network Survey	At least twice a year (As per survey
	pavement	Vehicle	months defined for the state basis
		(NSV)	rainy season)
3	Strength of	Falling Weight	At least once a year
	pavement	Deflectometer(FWD)	
4	Bridges	Mobile Bridge	At least twice a year (As per survey
		Inspection Unit(MBU)	months defined for the state basis
			rainy season)
5	Road signs	Retro-reflectometer	At least twice a year (As per survey
			months defined for the state basis
			rainy season)

The first testing with the help of NSV shall be conducted at the time of issue of Completion Certificate.

Schedule - L

(See Clause 12.2)

Completion Certificate

1	I, (Name of the Authority's Engineer), acting as the Authority's Engineer, unde
	and in accordance with the Agreement date
	(the" Agreer
	ent"), for Construction & up-gradation to 2-Lane with paved shoulder from Km 80+675 (Start of
	Kishtwar Bypass i.e., Existing km 97+075) to Km 95+550 (End of Helmet Top i.e., Existing kr
	123+035) of length 14.875 Km including Link Road from Km 0+000 to Km 1+871 of Length (1+871
	Total Length = 16+746 Km on Khellani–Kishtwar–Chattroo-Khanabal section of NationalHighwa
	No. 244 in Union Territory of Jammu & Kashmir (the "Project Highway") on Engineering
	Procurement and Construction (EPC) basis through(Name of
	Contractor), herebycertify that the Tests in accordance with Article 12 of the Agreement hav
	been successfully undertaken to determine compliance of the Project Highway with the
	provisions of the Agreement, and I am satisfied that the Project Highway can be safely an
	reliably placed in service of the Users thereof.
2	It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highwa
	have been completed, and the Project Highway is hereby declared f
	forentryintooperationonthisthedayof20,ScheduledCompleted
Da	e for which was the day of20
SIG	NED, SEALED ANDDELIVERED
Foi	and on behalf of the Authority's Engineerby:
(Sis	nature)
, -, }	
(Na	me) (Designation)(Address)
-	

Schedule - M

(See Clauses 14.6, 15.2 and 19.7)

Payment Reduction for Non-Compliance

1. Payment reduction for non-compliance with the Maintenance Requirements

- (i) Monthly lump sum payments for maintenance shall be reduced in the case of non-compliance with the Maintenance Requirements set forth in Schedule-E.
- (ii) Any deduction made on account of non-compliance with the Maintenance Requirements shall not be paid even after compliance subsequently. The deductions shall continue to be made every month until compliance isdone.
- (iii)The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph2.

2. Percentage reductions in lump sum payments on monthlybasis

(i) The following percentages shall govern the paymentreduction:

S.	Item/Defect/Deficiency	Percentage
No.		
(a)	Carriageway/Pavement	
(i)	Potholes, cracks, other surface defects	15%
(ii)	Repairs of Edges, Rutting	5%
(b)	Road, Embankment, Cuttings, Shoulders	
(i)	Edge drop, inadequate cross fall, undulations, settlement, potholes, ponding, obstructions	10%
(ii)	Deficient slopes, rain cuts, disturbed pitching, vegetation growth, pruning of trees	5%
(c)	Bridges and Culverts	
(i)	Desilting, cleaning. vegetation growth, damaged pitching, flooring, parapets, wearing course, footpaths, any damage to foundations	20%
(ii)	Any Defects in superstructures, bearings and sub-structures	10%
(iii)	Painting, repairs/replacement kerb, railings, parapets, guideposts/crash barriers	5%
(d)	Roadside Drains	
(i)	Cleaning and repair of drains	5%
(e)	Road Furniture	
(i)	Cleaning, painting, replacement of road signs, delineators, road markings, 200 m/km/5 th kmstones	5%
(f)	Miscellaneous Items	
(i)	Removal of dead animals, broken down/accidental vehicles, fallen trees, road	10%
	blockades or malfunctioning of mobile crane	
(ii)	Any other Defects in accordance with paragraph 1.	5%
(g)	Defects in Other Project Facilities	5%

(ii) The amount to be deducted from monthly lump-sum payment for non- compliance of

particular item shall be calculated asunder:

Where,

P= Percentage of particular item/Defect/deficiency fordeduction

M1= Monthly lump-sum payment in accordance para 1.2 above of this Schedule M2= Monthly lump-sum payment in accordance para 1.2 above of this Schedule L1= Noncomplying length L = Total length of the road,

R= Reduction (the amount to be deducted for non-compliance for a particular item/Defect/deficiency

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or non-compliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

Schedule - N

(See Clause 18.1 (i))

Selection of Authority's Engineer

1. Selection of Authority's Engineer

- (i) The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority's Engineer.
- (ii) In the event of termination of the Technical Consultants appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

2. Terms of Reference

The Terms of Reference for the Authority's Engineer (the "TOR") shall substantially conform with Annex 1 to this Schedule N.

3. Appointment of Government entity as Authority's Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority's Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority's Engineer.

Annex – I

(Schedule - N)

Terms of Reference for Authority's Engineer

1. Scope

- # In case the bid of Authority's Engineer is invited simultaneously with the bid of EPC project, then the status of bidding of EPC project only to be indicated
- (ii) The TOR shall apply to construction and maintenance of the ProjectHighway.

2. Definitions and interpretation

- (i) The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- (ii) References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of thisTOR.
- (iii)The rules of interpretation stated in Article 1 of the Agreement shall apply, mutatis mutandis, to thisTOR.

3. General

- (i) The Authority's Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good IndustryPractice.
- (ii) The Authority's Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority beforedetermining:
 - (a) any Time Extension;
 - (b) any additional cost to be paid by the Authority to the Contractor;
 - (c) the Termination Payment; or
 - (d) issuance of Completion Certificate or
 - (e) any other matter which is not specified in (a), (b), (c) or (d) above and which creates a financial liability on either Party.
- (iii) The Authority's Engineer shall submit regular periodic reports, at least once every month, to the Authority in respect of its duties and functions under this Agreement. Such reports

shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.

- (iv) The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
- (v) The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
- (vi) In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

4. Construction Period

- (i) During the Construction Period, the Authority's Engineer shall review and approve the Drawings furnished by the Contractor along with supporting data, including the geotechnical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1 (vi). The Authority's Engineer shall complete such review and approval and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- (ii) The Authority's Engineer shall review and approve any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.
- (iii) The Authority's Engineer shall review and approve the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty one) days stating the modifications, if any, required thereto.
- (iv) The Authority's Engineer shall complete the review and approve of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.
- (v) The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- (vi) The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.
- (vii) The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.

- (viii) The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- (ix) For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4 (ix), the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to GoodIndustry Practice for quality assurance.
- (x) The Authority's Engineer shall test check at least 50 (fifty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- (xi) The timing of tests referred to in Paragraph 4 (ix), and the criteria for acceptance/ rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.
- (xii) In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.
- (xiii) The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- (xiv) In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.
- (xv) The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.2.
- (xvi) Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- (xvii) In the event that the Contractor carries out any remedial measures to secure the safety

of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.

(xviii) The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate, as the case may be. For carrying out its functions under this Paragraph 4 (xviii) and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

5. Maintenance Period

- (i) The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- (ii) The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.
- (iii)The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in thisbehalf.
- (iv) In respect of any defect or deficiency referred to in Paragraph 3 of Schedule- E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.
- (v) The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause14.5.

6. Determination of costs and time

- (i) The Authority's Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.
- (ii) TheAuthority'sEngineershalldeterminetheperiodofTimeExtensionthatisrequired to be determined by it under theAgreement.
- (iii)The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause18.5.

7. Payments

- (i) The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2 (iv)(d).
- (ii) Authority's Engineer shall-

- (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
- (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable totheContractor, after adjustments in accordance with the provisions of Clause 19.10.
- (iii)The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.
- (iv) The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

8. Other duties and functions

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

9. Miscellaneous

- (i) A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authorityforthwith.
- (ii) The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.
- (iii)Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an as-builtsurveyillustratingthelayoutoftheProjectHighwayandsetbacklines,ifany,ofthe buildingsandstructures forming partof ProjectFacilities;and shall hand themoverto the Authority against receiptthereof.
- (iv) The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- (v) TheAuthority'sEngineershallinformtheAuthorityandtheContractorofanyeventof Contractor's Default within one week of itsoccurrence.

Schedule - O

(See Clauses 19.4 (i), 19.6 (i), and 19.8 (i))

Forms of Payment Statements

1. Stage Payment Statement forWorks

The Stage Payment Statement for Works shall state:

- (a) the estimated amount for the Works executed in accordance with Clause 19.3
- (i) subsequent to the lastclaim;
- (b) amounts reflecting adjustments in price for the aforesaidclaim;
- (c) the estimated amount of each Change of Scope Order executed subsequent to the lastclaim;
- (d) amountsreflectingadjustmentinprice, if any, for (c) above in accordance with the provisions of Clause 13.2 (iii)(a);
- (e) total of (a), (b), (c) and (d)above;
- (f) Deductions:
 - i. Any amount to be deducted in accordance with the provisions of the Agreement excepttaxes;
 - ii. Any amount towards deduction of taxes; and
 - iii. Total of (i) and (ii) above.
- (g) Net claim: (e) (f)(iii);
- (h) The amounts received by the Contractor upto the lastclaim:
 - i. For the Works executed (excluding Change of Scopeorders);
 - ii. For Change of Scope Orders, and
 - iii. Taxesdeducted

2. Monthly Maintenance PaymentStatement

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the Agreement;
- (b) the deductions for maintenance work notdone;
- (c) net payment for maintenance due, (a) minus(b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction oftaxes

3. Contractor's claim for Damages

Note: The Contractor shall submit its claims in a form acceptable to the Authority.

Schedule - P

(See Clause 20.1)

Insurance

1. Insurance during ConstructionPeriod

- (i) The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire andterrorism:
 - (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
 - (b) insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- (ii) The insurance under sub para (a) and (b) of paragraph 1(i) above shall cover the Authority and the Contractor against all loss or damage from any cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

2. Insurance for Contractor's DefectsLiability

The Contractor shall effect and maintain insurance cover of not less than 15% of the Contract Price for the Works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and which arises from a cause occurring prior to the issue of the Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

3. Insurance against injury to persons and damage toproperty

(i) The Contractor shall insure against its liability for any loss, damage, death or bodily injury, or damage to any property (except things insured under Paragraphs 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number ofoccurrences.

The insurance cover shall be not less than: Rs. 2,00,00,000/- (Two Crore only)

- (ii) The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:
 - (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works;and
 - (b) damage which is an unavoidable result of the Contractor's obligations to execute the Works.

4. Insurance to be in jointnames

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

Schedule-Q

(See Clause 14.10)

Tests on Completion of Maintenance Period

1. Riding Qualitytest

Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,200 (two thousand and two hundred only)] mm for each kilometer.

2. Visual and physicaltest

The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include measurement of cracking, rutting, stripping and potholes and shall be as per the requirement of maintenance mentioned in Schedule-E.

Schedule-R

(See Clause 14.10)

Taking Over Certificate

I,
SIGNED, SEALED ANDDELIVERED
(Signature)
(Name and designation of Authority'sRepresentative)
(Address)

*** End of the Document *****